



“NON-ASBESTOS GLAND PACKINGS”



STYLE “YE-333”

Pure PTFE packing Applicable for packing seals of pump, valves and vessels at high linear speed and pressure.

Pressure(bar)	50	100	250
Temp	-200 to +280°C		
pH range	0 ~ 14		



STYLE “YE-63”

Pure PTFE graphited packing. Applicable in pumps and valves of Chemical, Mining, textile industries etc


Pressure(bar)	100	200	300
Temp	-200 to +280°C		
pH range	0 ~ 14		



STYLE “YE-874”

Aramid fibre packing Applicable for water treatment system, low pressure valves, chemical industries, Nuclear & Thermal power station.

Pressure (bar)	150	200	300
Temp	-200 to +250°C		
pH range	2 ~ 12		

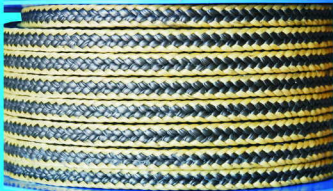

STYLE “YE-676”

Combinational packing of GFO® and Aramid on the corners. Applicable for pumps, piston pumps, boilers, hot water pumps.


Pressure(bar)	150	250	350
Temp	-100 to +280°C		
pH range	2 ~ 14		



STYLE “YE-171”

Combinational packing of PTFE yarn and Aramid on the corners. Applicable for reciprocating motion, high pressure and speed, aggressive chemical fluids apart from molten alkaline metals.

Pressure(bar)	50	100	250
Temp	-100 to +280°C		
pH range	2 ~ 14		

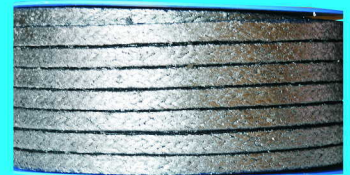

STYLE “YE-36” M

Expanded graphite (flexible graphite) reinforced with Inconel wire. Applicable for high temperature valve stems, nuclear & Thermal power station, oil refineries.(Also available without wire)


Pressure(bar)	30	100	300
Temp	-250 to +650°C		
pH range	0 ~ 14		



STYLE “YE-387”

Packing made from 100% carbon yarn reinforced with “S.S or INCONNEL wire”. Applicable for high speed rotary equipment, boiler feed water, steam, oils, aromatic solvents.

Pressure(bar)	100	200	300
Temp	-150 to +600°C		
pH range	0 ~ 14		

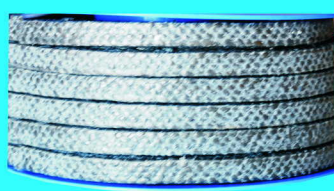

STYLE “YE-386”

Packing made from carbon yarn impregnated with graphite. applicable for packing seal of Rotary or reciprocating mechanisms in corrosive high /low temperature, high pressure, high linear speed.

Pressure(bar)	25	150	150
Temp	-150 to +450°C		
pH range	0 ~ 14		



STYLE “YE-27”

Made of carbonized yarn impregnated with PTFE. Applicable for packing seal or rotary pumps and reciprocating pumps at a high linear speed, valves and vessels.

Pressure(bar)	25	150	150
Temp	-150 to +315°C		
pH range	0 ~ 14		

ALL THE ABOVE PRODUCTS ARE 100% ASBESTOS FREE