

DYNAVAC[®]


Industrial Vacuum Cleaners & Dust Collection Equipment



Industrial Vacuum Cleaners

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Standard (Hydra STD)

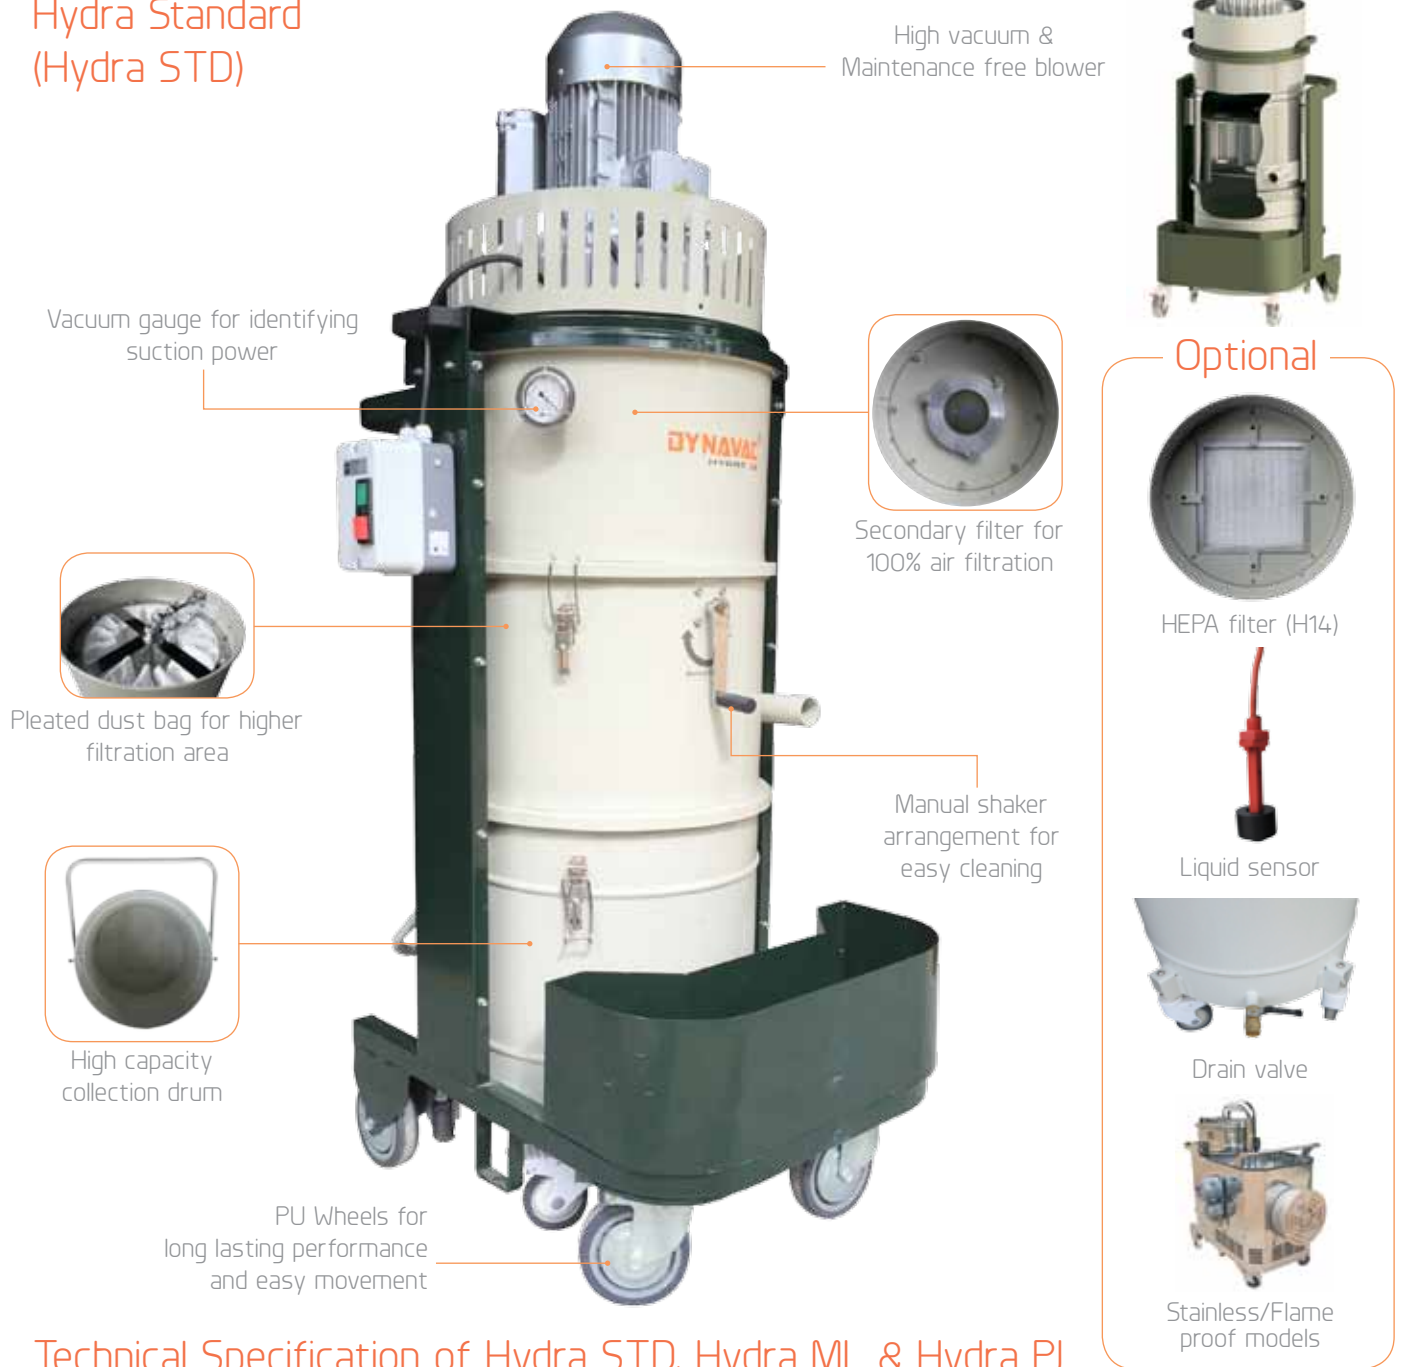

Technical Specification of Hydra STD, Hydra ML & Hydra PJ

| Hydra Series | Power (kW) | Maximum Vacuum (mm H ₂ O) | Airflow (m ³ /Hr) | Collection Capacity (liters) | Filter Efficiency | Dimension LxBxH (m) | Weight (kg) |
|--------------|------------|--------------------------------------|------------------------------|------------------------------|-------------------|---------------------|-------------|
| Hydra 1.0 | 0.75 | 1950 | 100 | 50 | M | 0.8 x 0.65 x 1.20 | 85 |
| Hydra 2.0 | 1.50 | 2000 | 218 | 50 | M | 0.8 x 0.65 x 1.20 | 102 |
| Hydra 3.0 | 3.00 | 3000 | 318 | 80 | M | 0.8 x 0.65 x 1.80 | 117 |
| Hydra 5.0 | 4.00 | 3000 | 420 | 80 | M | 0.8 x 0.65 x 1.80 | 119 |
| Hydra 5 | 4.00 | 2050 | 490 | 80 | M | 1.2 x 0.65 x 1.45 | 195 |
| Hydra 7.0 | 5.50 | 3750 | 510 | 80 | M | 1.2 x 0.65 x 1.45 | 220 |
| Hydra 7 | 5.50 | 2300 | 700 | 80 | M | 1.2 x 0.65 x 1.45 | 225 |

hydra

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Metal & Liquid (Hydra ML)



Optional



HEPA filter (H14)



Automatic cleaning system



Built in compressor for automatic cleaning



Stainless/Flame proof models

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Pulse jet (Hydra PJ)



Optional



HEPA filter (H14)



Liquid sensor



Drain valve



Built in compressor for automatic cleaning



Stainless/Flame proof models

Industrial Vacuum Cleaner Dry Use



High filtration dust bags for proper filtration

Vacuum gauge for identifying suction power

Sleek drum with blowing option attachment

High vacuum & Maintenance free blower

PU Wheels for long lasting performance and easy movement

Latch locks to ensure perfect locking

Optional



Floor brush attachment model



Stainless steel model



Flame proof model



Nova cross section

Technical Specification

| Nova Series | Power (kW) | Maximum Vacuum (mm H ₂ O) | Airflow (m ³ /Hr) | Collection Capacity (liters) | Filter Efficiency | Dimension LxBxH (m) | Weight (kg) |
|-------------|------------|--------------------------------------|------------------------------|------------------------------|-------------------|---------------------|-------------|
| Nova 1.0 | 0.75 | 1950 | 100 | 40 | M | 0.45 x 0.5 x 0.95 | 44 |
| Nova 2.0 | 1.50 | 2000 | 218 | 50 | M | 0.60 x 0.6 x 1.20 | 55 |
| Nova 3.0 | 3.00 | 3000 | 318 | 70 | M | 0.60 x 0.6 x 1.35 | 63 |
| Nova 5.0 | 4.00 | 3000 | 420 | 70 | M | 0.60 x 0.6 x 1.35 | 90 |
| Nova 5 | 4.00 | 2050 | 490 | 80 | M | 1.20 x 0.6 x 1.20 | 120 |
| Nova 7.0 | 5.50 | 3750 | 510 | 95 | M | 0.70 x 0.8 x 1.35 | 175 |
| Nova 7 | 5.50 | 2300 | 700 | 180 | M | 1.40 x 0.7 x 1.20 | 189 |

Accessories



Round Brush

Floor Brush

Small Crevice Nozzle

Imported Flat Nozzle

PVC Flat Nozzle

PVC Curved Nozzle

1-foot PVC Pipe

4-foot PVC Pipe

Note: 5 meters of flexible weightless hose and 15 meters power cable are also provided.

Single Phase Commercial Vacuum Cleaner – Wet & Dry Use



Prime - I



Prime - II



Prime - III

Accessories

Prime - I



Prime - II & III



Technical Specification

| Prime Series | Power (kW) | Maximum Vacuum (mm H ₂ O) | Airflow (m ³ /Hr) | Collection Capacity (liters) | Filter Efficiency | Dimension LxBxH (m) | Weight (kg) |
|--------------|------------|--------------------------------------|------------------------------|------------------------------|-------------------|---------------------|-------------|
| Prime I | 1.2 | 2200 | 190 | 30 | M | 04 x 04 x 0.7 | 8 |
| Prime II | 2.0 | 2200 | 350 | 70 | M | 0.6 x 0.6 x 0.8 | 20 |
| Prime III | 3.0 | 2200 | 380 | 70 | M | 0.6 x 0.6 x 0.8 | 22 |

Optional: HEPA filter and floor brush attachment models available.

Features

- Powerful silenced single phase Ametek® motor with auto thermal cut off
- Wet & dry applications
- Stainless steel tank
- Professional closing hooks
- Shock proof trolley
- Cloth filter
- Traceless wheels
- 1 year warranty
- 1.5 m hose for flexible cleaning
- 4.5 m power cable

Applications





302, ALG Farms,
Nambialaganpalayam,
Vedapatti (P.O),
Coimbatore - 641 007
India

Tel : +91 (422) 4525555 (20 lines)
Mob : +91 9677600302, 9443721682
Fax : +91 (422) 4525597
email : sales@dynavac.org

www.dynavac.in

