



Ecomatic
Carton folder Gluer

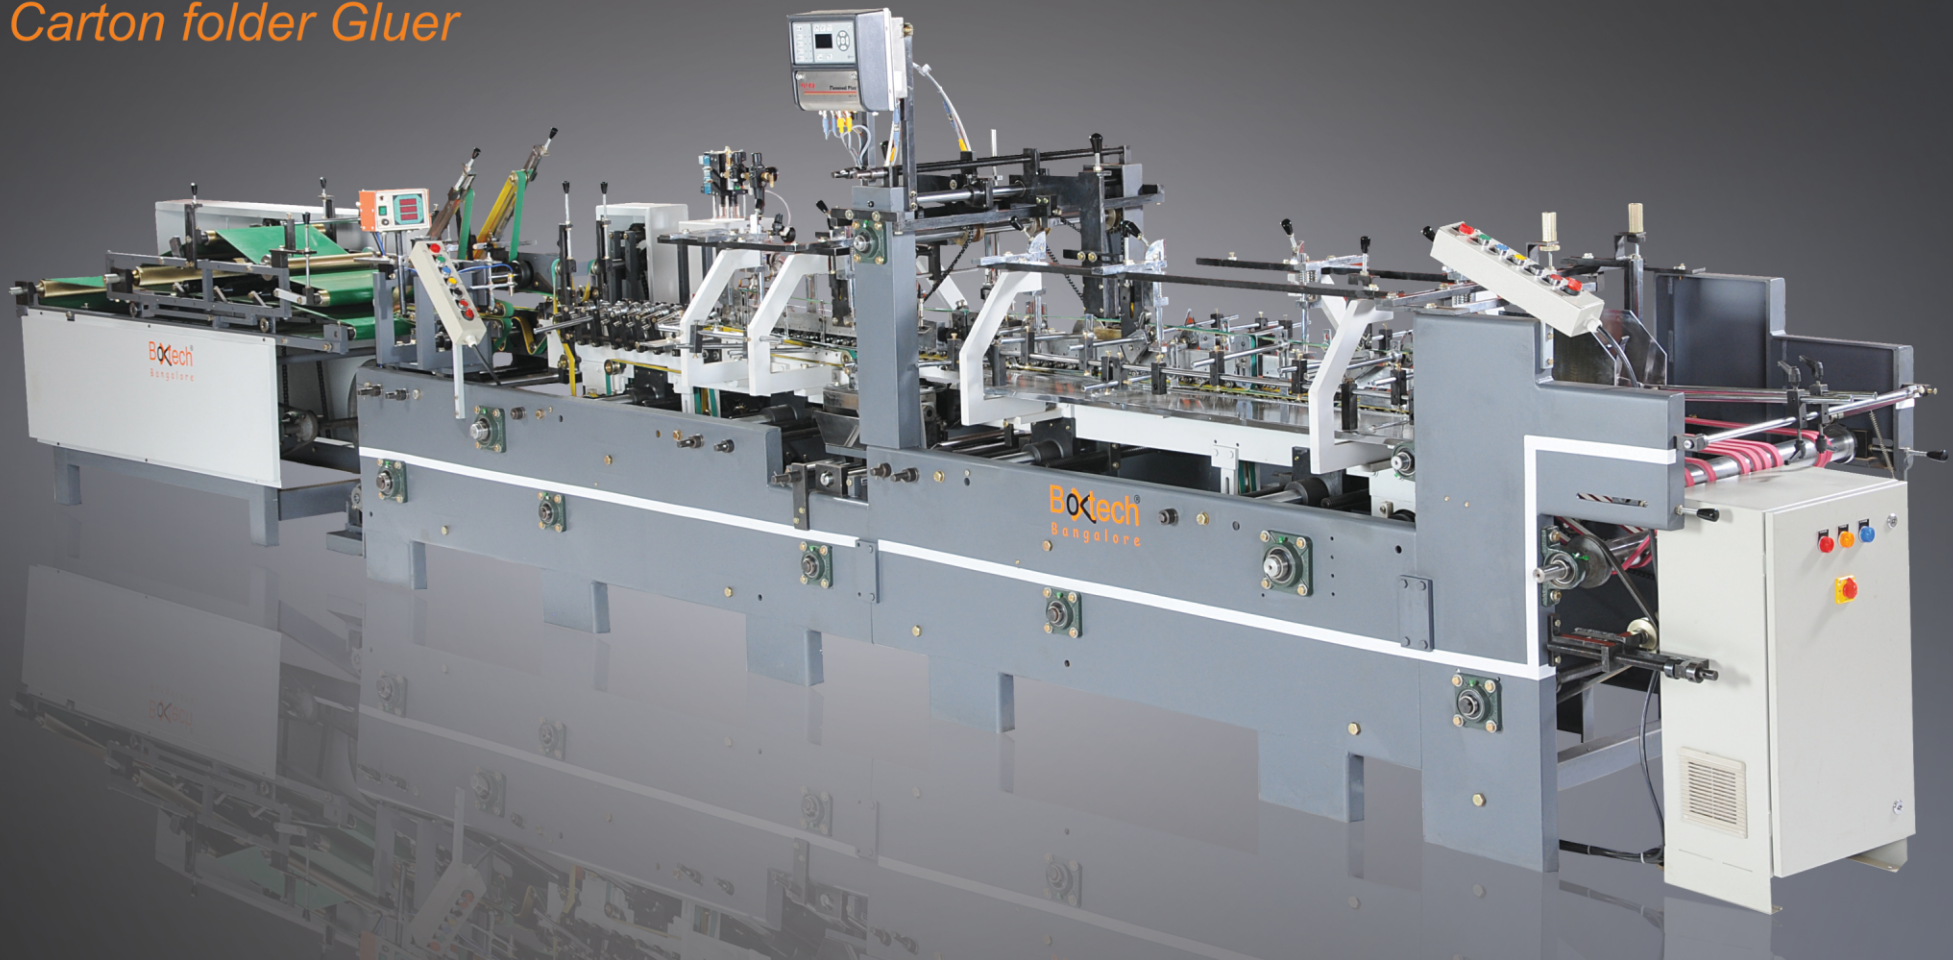

Technical Specification


Straight Line Carton

Dimension	BT-HS 35	BT-HS 45	BT-HS 55	BT-HS 65
A-max	350	350	500	500
A-min	80	80	100	100
B-max	350	450	550	650
B-min	70	80	100	100
C-min	7	7	8	8
D-min	60	60	60	70
E-min	60	60	60	70



Crash Lock Bottom Carton

Dimension	BT-HSLB 35	BT-HSLB 55	BT-HSLB 65
A-max	350	500	500
A-min	80	100	100
B-max	450	550	650
B-min	160	160	160
C-min	7	8	8
D-min	60	60	70
E-min	60	60	70
P1-min	P2-min	P3-min	P4-min
40	40	40	40



Electrical Specification

Variable frequency a.c drive
Digital AC drive with Spike Protection
3-phase power input:-3.5 kw - 7 kw
4 pole motor with RPM max:- 1440
Line Speed :- 100-200ft-mtrs/minute
User Friendly Interface

Features

Feeder Variator
Spring Loaded Suspension Top-Tracks
Smooth Mechanized Bottom Track
Mobile Control Switches
Sealed Bearings Reducing Maintenance
High Grip Transmission Belt
Anti Corrossion Powder Coated Frame
Stainless Steel/Aluminum Glue Tank

Contact Us

Boxtech® Bangalore

B-106/1-A, 3rd Cross, 3rd Stage,
Peenya Industrial Estate, Bangalore - 560 058
Ph: +91 98455 20543 / 98803 84480

Email: info@boxtech.in / sales@boxtech.in / ajay@boxtech.in