


# PERMANENT MAGNETIC LIFTER



- Maximum pulling force is greater than 3.5 times rated lifting capacity.
- Largest available capacity is 5,000 Kg.
- Simple switch and safety button design allows for one handed operation.

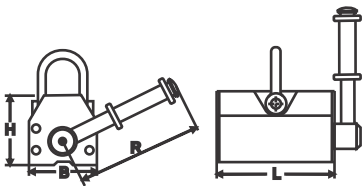


DESCRIPTION	FHPML-01	FHPML-03	FHPML-06	FHPML-10	FHPML-20	FHPML-30	FHPML-50
CAPACITY(Kgs.)	100	300	600	1000	2000	3000	5000
DIMENSIONS ( mm )							
L	92	165	228	266	394	431	595
B	64	88	118	150	196	234	294
H	70	96	126	158	204	232	289
R	145	176	257	303	470	576	728
NET WEIGHT ( Kgs)	3	10	23.6	50	105	220	344
MAX. PULL OFF							
STRENGTH (Kgs)	350	1050	2100	3500	7000	10500	15000
OPERATION TEMP.( C)	<80	<80	<80	<80	<80	<80	<80

# CRANE LOAD CELL



- High-quality Alloy Steel Receptor.
- Aluminium die-casting enclosure.
- 38mm LED & LCD display with backlight.
- High-duty bow shackle,
- High-duty eye hook,
- High capacity rechargeable battery,
- Water-proof panel button.
- Infrared remote controlling.
- Capacity: 1000kg. - 20000kg.

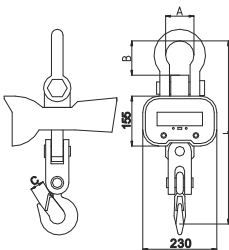

DESCRIPTION	FHCLC-01	FHCLC-02	FHCLC-03	FHCLC-05	FHCLC-10	FHCLC-15	FHCLC-20
CAPACITY(Kgs.)	1000	2000	3000	5000	10000	15000	20000
DIMENSIONS ( mm )							
A	58	58	73	92	94	128	135
B	83	83	107	135	145	178	250
C	30	30	33	45	60	75	75
L	420	420	480	585	770	860	950
NET WEIGHT ( Kgs)	12	13	15	24	43	61	64