



Premium quality aerosol sprays manufactured in technical collaboration with M/s AerVOE USA, M/s Slide USA & M/s Action can UK.




3070 SUPER 5

MULTI- USE "5" FUNCTION PROBLEM SOLVER

GENERAL DESCRIPTION

Plastic safe, high di-electric strength cleaner, lubricant, moisture displacer, penetrant & corrosion inhibitor that loosens dirt, scale, rust..... Reopens jammed assemblies, cleans grease/grime and prevents electrical malfunctions caused by water penetration, humidity, condensation or corrosion.

- ★ Fast action "deep" penetrative cleaner- quickly loosens dirt, scale, rust..... re-opens jammed assemblies & cleans grease, grime...
- ★ Superior capillary action- best in class penetration
- ★ Displaces moisture. Dries out wet electrical systems & ignitions.
- ★ Cleans & degreases. Penetrates dirt, grime, grease.....dissolves adhesives....
- ★ Dielectric strength- 47KV. Instantly improves electrical properties & enables equipment operation.
- ★ Protects against rust & corrosion. Fills microscopic irregularities on the surface & forms a protective barrier against corrosion & moisture damage
- ★ Cleans, eliminates moisture, restores resistance valves & helps stop current leakages, arcing.....

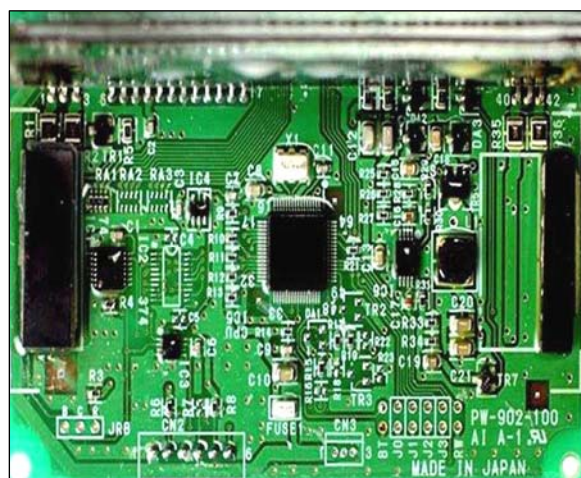

- ★ Prevents breakdowns caused by high humidity acid/ alkali fumes, salt air...
- ★ Moisture barrier. Prevents corrosion of all electrical equipments during both storage & transport. (removal not necessary)
- ★ Contact lubricant improves current flow.
- ★ Excellent dielectric non-greasy, silicone free long lasting lubricant especially designed for the lubrication & protection of precision machinery, electrical systems..... especially those situated in damp & corrosive, acids/ alkali laden conditions.
- ★ Precision light lubrication.



FEATURES

- ◆ Cleans.
- ◆ Lubricates.
- ◆ Penetrates.
- ◆ Displaces moisture.
- ◆ Prevents corrosion.

CHARACTERISTICS AND PROPERTIES

1. Color	Light Brown
2. Specific Gravity	0.8
3. Boiling point	375°F (minimum)
4. Flash Point	>160°F tag closed cup.
5. Vapour Density	> 1
6. Base Materials	Mineral Oil, Aliphatic & Oxygenated solvents.
7. Temp Range	-50° F to + 375 ° F
8. Solubility in water	Insoluble
9. Solubility in solvents	Soluble in aliphatic hydrocarbons
10. Oxidising properties	None
11. CFC'S and Halogens	Nil
12. Toxicity	Non-toxic within OSHA permissible limits.
13. Type of Film	Continuous molecular, self repairing film
14. Dielectric Strength	47,000 V/ ASTM #D.877
15. PH	6.0 to 7.0
16. Heat Resistance	Film degradation begins at 150°C
17. Lubrication (Falex)	>1500 lbs falex
18. Average film thickness	1 to 2 Microns.



APPLICATIONS

a). Mechanical:

Threaded assemblies, tools, molds, dies, electrical systems, precision machined components.....

b). Electrical :

Connectors, relays, switchgears, circuit breakers, motors, generators, electro-mechanical equipments, communication systems, re-opening jammed parts & assemblies.....

CAUTION

- Spray away from eyes & face.
- Use in well ventilated areas.
- Contents are under pressure, store away from direct sun light & heat sources.
- Test on surface before use.

360° #3070 Super 5

• CLEANS • PENETRATES • PROTECTS
• PREVENTS CORROSION

• CLEANS • LUBRICATES • PENETRATES
• DISPLACES MOISTURE