

## CHEMICAL ANCHORING SYSTEM

# KWIK RE1000-PR0 Pure Epoxy Chemical Anchor

**Article No.: KITRE0585** 



: 585 ml Content Colour of Mortar: Red

Gelling Time (t<sub>gel</sub>) : 20 mins at 30°C Curing Time (t<sub>cure</sub>): 6 hrs. at 30°C Shelf Life : 24 months


Pure epoxy mortar with ETA-option 1 approval, for use in cracked and


- Approved for seismic loads according to category C1.
- Approved for diamond drilled holes.

uncracked concrete.

- Suitable for dynamic loads, Higher embedment depths.
- The cracked concrete approval is valid for fixing with normal threaded rods, rebars and an internal threaded sleeve. The approval covers threaded rods with diameters M8-M30 and rebars diameter Ø8-Ø32.
- The mortar can be used for overhead applications and in dry, wet and water filled holes.


#### SUITABLE BASE MATERIALS











#### **APPROVALS**





















### KWIK VE500-PRO TM


### Vinylester Chemical Anchor


: 360 ml Content Colour of Mortar: Grey

Gelling Time (t<sub>gel</sub>) : 4 mins at 30°C Curing Time (t<sub>cure</sub>) : 25 mins at 30°C


: 18 months Shelf Life


#### SUITABLE BASE MATERIALS











**Article No.: KITVE0360** 

#### Vinylester chemical anchor, approved for almost any application and base material.

- Approved for seismic loads according to category C1.
- Approved temperature range of 120°C and a fast curing time for high loads.
- Suitable for use in rotary hammer drilled holes, water filled holes, for overhead applications and embedment depths of  $\geq 4x\emptyset \sim 20x\emptyset$ .

### **APPROVALS**



TR 023 - PI Rebar

ETAG 001 - Core Drill









**Article No.: KITPE0360** 








## KWIK PE500-PR0™

### Polyester Chemical Anchor

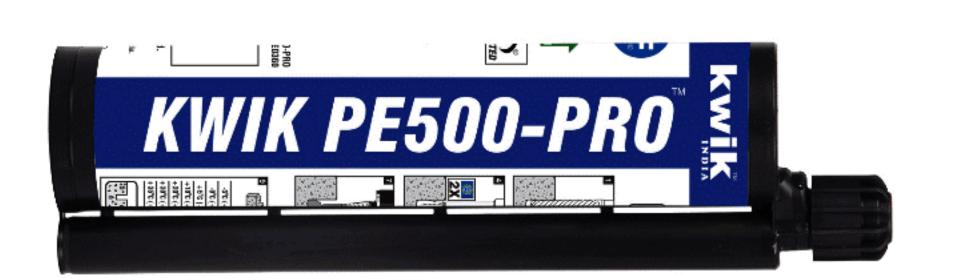

: 360 ml Content Colour of Mortar: Grey


Gelling Time (t<sub>ael</sub>) : 4 mins at 30°C Curing Time (t<sub>cure</sub>): 25 mins at 30°C

: 12 months Shelf Life

Polyester mortar with an ETA option 7 approval for M8-M24 rods.

- Ideal for all types of non-structural applications.
- The mortar can be used for overhead applications and in dry & wet holes.
- Suitable for attachment points with small edge and axial distances due to an anchoring free of expansion forces.
- High chemical resistance, high bending and pressure strength.
- Excellent Load Values.

#### SUITABLE BASE MATERIALS









#### **APPROVALS**















# KWIK RANGE OF PRODUCTS

- Chemical Anchoring Systems
- Mechanical Anchoring Systems
- Threaded Anchor Rods
- **Tools & Accessories**
- Nylon Anchoring Systems
- Polyurethane Foam

- Illicaucu Aliciloi Rous	I IOOIS & ACCESSOITES	Polyuletila	ine i Cain
KWIK RE1000-PRO	Kwik Pure Epoxy Chemical Anchor		KWIK RE1000-PRO
KWIK VE-500-PRO	Kwik Vinylester Chemical Anchor		KWIK VE500-PRO
KWIK PE-500-PRO	Kwil Polyester Chemical Anchor		KWIK PE500-PRO
KWIK KMDG 585	Kwik Manual Dispenser Gun (585ml)		
KWIK KMDG 360	Kwik Manual Dispenser Gun (360ml)		RWIS .
KTR 58/88/100/B7	Threaded Anchor Rods (5.8 / 8.8 / 10.9	/ B7 Gr.)	
KTR A2/A4	Threaded Anchor Rods (SS304 & SS316	6 Gr.)	
KTB-PRO / KTB-SS-PRO	Kwik Through Bolt (5.8 / A2 / A4 Gr.)		
KTB-PRO-EYE	Safety Eye Hook Anchor		Animaming an annual and a second and a secon
KDM-PRO	Drop In Anchor		
KDM-ST	Manual Setting Tool		
KCSB-PRO	Concrete Screw Bolt (Hex Head)		
KPS-FAST S (CSK & CSK-SS)	Universal Frame Fixing Anchor		
KPS-FAST K (HEX & HEX-SS)	Universal Frame Fixing Anchor		
KDF-PRO	Kwik Door Frame Anchor (Economical \	/ersion)	
KHF	Kwik Hammer Fix Anchor		
KNP	Kwik Universal Nylon Plugs		
KNP-L	Kwik Universal Nylon Plugs - Long		
KOMBI-FOAM PRO	Polyurethane Foam (Straw & Gun Grad	e) (E	KOMBI-FOAM PRO
KOMBI-FOAM PRO FR	Fire Rated PU Foam (Straw & Gun Gra	de)	KOMBI-FOAM PRO FR
KOMBI CLEANER PRO	Polyurethane Foam Cleaner	(	KOMBI-CLEANER PRO
KOMBI GUN	Polyurethane Foam Dispenser Gun		