

METAL COAT

POWDER FEEDER MPF-3350

This unit is compatible with numerous combustion powder spray guns and HVOF systems.

Powder Carrier Disks are available for both coarse or fine powders.

Canister can with stand a back pressure up to 7.5 bar.



The **MPF 3350 Powder Feeder** is specifically designed for thermal spray coatings. Its small size makes it a portable powder feeder, which can be carried to site for job work. The unit is controlled to extremely precise and repeatable feed rates. The

powder hopper (canister) is mounted on a hinged plate which allows users to easily remove excess powder and clean the interior. Separate powder feed and carrier gas controls make it simple to clear excess material throughout the spray system. Remote operation switch can be added to any gun.

Working Operation

The feeder operates on a constant volumetric feed principle. At the bottom of the pressurized canister, there is powder carrier disk having slotted wheel mounted off centre with respect to the canister. A given volume of powder fits into each slot and as the disk rotates past the exit port,

the powder is fed into the powder hose and then to the spray gun by an inert carrier gas such as Nitrogen. The powder feed rate is directly proportional to the powder disk rpm which can be controlled from the front panel.


Technical Specifications

Number of Canisters	: 1 (One)
Canister Capacity	: 3350 CC Each
Canister Dimensions	: 120mm (Inner Dia.) x 310mm (Height)
Cabinet Dimensions	: 16.5" L x 16.5" B x 26" H
Electricity	: 220V/ 1P/ 50/60 Hz OR 110V/ 1P/ 60Hz
Weight	: 42 Kg (Approx.)

Colours Available

CABINET	CANISTER	CABINET	CANISTER
BLUE	RED	BLUE	BLACK
BLUE	GOLDEN	RED	GOLDEN

Approx. Feedrate

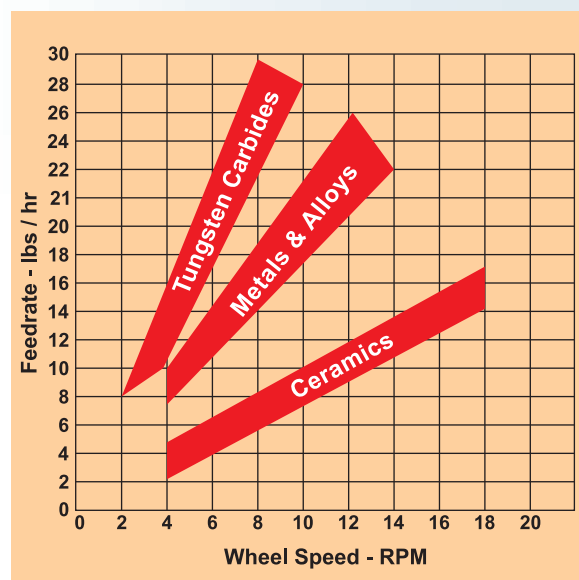

Features

- Feed rate can be easily varied from 1 RPM up to 29 RPM.
- Large canister capacity.
- Low wear and maintenance requirement.
- It has a digital display which ensures correct readings.
- Remote or Local powder feed control selectable.
- Sensor less vector control technology for accurate RPM control.
- It is compatible to a wide range of thermal equipment such as Plasma, HVOF System and Combustion Powder Flame spray systems.
- This unit is provided with powder pressure gauge to regulate the pressure accurately.
- Safety Valve is provided to release high canister pressure when required.

H.O. & Works:

METAL COAT

B-43, 44, 45, 46, Industrial Estate
Jodhpur - 342 003 (Rajasthan) INDIA



+91 93140 28848
+91 98290 27807



+91-291-2641325



metalcoat291@yahoo.in
sales@metalcoat.co.in



www.metalcoat.co.in