

KisanKraft[®]

Krushaka Mantram-Krushi Yantram



BIS:ISI
Approved



ISO
9001:2015
Certified



FMTTI
Tested



Pan India
Distribution



Spare Parts
Available



Subsidy
Available

PETROL



KK-IC-8626 FMTTI

Rated Power: 1.14 kW (1.52 hp)
 Displacement: 43 cc
 Speed: 6250 RPM
 SFC (Max): 610g/kw.h
 Number of Gears: 1 Fwd
 Cultivation Width: 25.0-30.0 cm
 Cultivation Depth: 2.0-2.7 cm
 Engine/Fuel: 2-Stroke/Petrol
 Fuel Tank Capacity: 1 L
 Fuel Consumption: 0.80 L/hr



KK-IC-520

Rated Power: 1.47 kW (1.97 hp)
 Displacement: 52 cc; Speed: 6500 RPM
 SFC (Max): 680g/kwh
 Number of Gears: 1 Fwd
 Cultivation Width: 300 mm
 Cultivation Depth: >50 mm
 Engine/Fuel: 2-Stroke/Petrol
 Fuel Tank Capacity: 1 L



KK-IC-6320

Rated Power: 1.95 kW (2.61 hp)
 Displacement: 62 cc; Speed: 9000 RPM
 SFC (Max): 586g/Kw.h
 Number of Gears: 1 Fwd
 Cultivation Width: 300 - 350 mm
 Cultivation Depth: ≥50 mm
 Engine/Fuel: 2-Stroke/Petrol
 Fuel Tank Capacity: 1.2 L



KK-IC-100P

Rated Power: 1.4 kW (1.88 hp)
 Displacement: 98.5 cc
 Speed: 3100 RPM (Eng), 143 RPM (Rota)
 SFC (Max): 550g/KWh
 Number of Gears: 1 Fwd
 Cultivation Width: 42 cm
 Cultivation Depth: 5-6 cm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 1.6 L
 Fuel Consumption: 380 ml/hr



KK-IC-200P FMTTI

Rated Power: 3.8 kW (5 hp)
 Displacement: 196 cc
 Speed: 3600 RPM(Eng), 800 RPM(Rota)
 SFC (Max): ≤374g/kWh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 73.4-73.8 cm
 Cultivation Depth: 5.1-5.4 cm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 3.0 L
 Fuel Consumption: 0.95 L/hr



KK-IC-205P FMTTI

Max Power: 3.8 kW (5 hp)
 Displacement: 196 cc; Speed: 3400 RPM
 SFC (Max): ≤374g/kWh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 85-86 cm
 Cultivation Depth: 6.6-7.0 cm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 0.90 L/hr



KK-IC-208P FMTTI

Rated Power: 3.8 kW (5 hp)
 Displacement: 208 cc; Speed: 3600 RPM(Eng)
 SFC (Max): ≤374g/kWh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 93.9 to 94.2 cm
 Cultivation Depth: 7.9 to 8.4 cm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 0.95 L/h



KK-IC-210P

Rated Power: 4.2 kW (5.63 hp)
 Displacement: 208 cc
 Engine Speed: 3600 RPM
 SFC (Max): ≤374g/kWh
 Engine: 4-Stroke, Petrol Engine
 Cultivation Width: 750 mm
 Cultivation Depth: ≥100 mm
 Fuel Tank: 3.6 L



KK-IC-212P

Rated Power: 5.22 kW (7 hp)
 Displacement: 212 cc; Speed: 3600 RPM
 SFC (Max): ≤374g/kWh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 800 mm
 Cultivation Depth: >100 mm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 3.6 L

PETROL



KK-IC-215P

Rated Power: 5.22 kW (7 hp)
 Displacement: 212 cc, Speed: 3600 RPM
 SFC (Max): 420g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 1050 mm
 Cultivation Depth: ≥150 mm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 4 L



KK-IC-410P

Rated Power: 5.8 kW (7.8 hp)
 Displacement: 270 cc, Speed: 3600 RPM
 SFC (Max): 420g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 1350 mm
 Cultivation Depth: 150 mm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 6 L
 Fuel Consumption: 0.6 L/hr



KK-IC-620P

Rated Power: 5.22 kW (7 hp)
 Displacement: 212 cc, Speed: 3600 RPM
 SFC (Max): 420g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 62 cm
 Cultivation Depth: 10-20 cm
 Engine/Fuel: 4-Stroke/Petrol
 Fuel Tank Capacity: 4 L
 Fuel Consumption: 395g/kw.h

DIESEL



KK-IC-250D **FMTTI**

Rated Power: 2.26 kW (3 hp)
 Displacement: 247 cc
 Speed: 3600 RPM
 SFC (Max): 330g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 0.875 to 0.90 m
 Cultivation Depth: 5.5 to 6.33 cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 2.35 L
 Fuel Consumption: 0.590 L/hr



KK-IC-255D

Rated Power: 3.73 kW (5 hp)
 Displacement: 247 cc
 Speed: 3600 RPM
 SFC (Max): 330g/kwh
 Number of Gears: 2 Fwd (High & Low),
 1 Rev (High & Low)
 Cultivation Width: 0.614 to 0.627 m
 Cultivation Depth: 4.16 to 5.64 cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 2.35 L
 Fuel Consumption: 0.657 L/hr



KK-IC-256D **FMTTI**

Rated Power: 4.0 kW (5.36 hp)
 Displacement: 247 cc
 Speed: 3600 RPM
 SFC (Max): 330g/kwh
 Number of Gears: 2 Fwd (High & Low)
 1 Rev (High & Low)
 Cultivation Width: 0.614 to 0.627 m
 Cultivation Depth: 4.16 to 5.64 cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 2.35 L
 Fuel Consumption: 0.657 L/hr



KK-IC-300D **FMTTI**

Standard Rotating Tines
 Rated Power: 4.3 kW (5.76 hp)
 Displacement: 296 cc, Speed: 3600 RPM
 SFC (Max): 310g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 117-118cm
 Cultivation Depth: 6.0-6.2cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 3.5 L
 Fuel Consumption: 0.809 L/hr



KK-IC-350D **FMTTI**

Ditcher Function
 Rated Power: 4.3 kW (5.76)
 Displacement: 296 cc, Speed: 1800 RPM (Eng)
 SFC (Max): 310g/kwh
 Number of Gears: 2 Fwd (H/L), 2 Rev (H/L)
 Cultivation Width: 59.8 - 60.2 cm
 Cultivation Depth: 4.1 - 5.30 cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 3.5 L
 Fuel Consumption: 0.65 L/hr



KK-IC-650D

Rated Power: 4 kW (5.36 hp)
 Displacement: 296 cc
 Speed: 3600 RPM
 SFC (Max): 310g/kwh
 Number of Gears: 2 Fwd, 1 Rev
 Cultivation Width: 66 cm
 Cultivation Depth: ≥10 cm
 Engine/Fuel: 4-Stroke/Diesel
 Fuel Tank Capacity: 3.5 L
 Fuel Consumption: 280g/kw.h

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

DIESEL



KK-IC-400D **FMTTI**

Rated Power: 6.1 kW (8.1 hp)
Displacement: 418 cc
Speed: 3680 RPM(Eng), 800 RPM(Rota)
SFC (Max): 290g/kwh
Cultivation Width: 148-149 cm
Cultivation Depth: 6.8-7.0 cm
Engine/Fuel: 4-Stroke/Diesel
Number of Gears: 2 Fwd, 1 Rev
Fuel Tank Capacity: 4.9L
Fuel Consumption: 0.860 L/hr



KK-IC-400E (Electric Start)

Rated Power: 5.81 kW (7.8 hp)
Displacement: 418 cc
Speed: 3600 RPM(Eng), 800 RPM(Rota)
SFC (Max): 290g/kwh
Cultivation Width: 148-149 cm
Cultivation Depth: 7.5-9.7 cm
Engine/Fuel: 4-Stroke/Diesel
Number of Gears: 2 Fwd, 1 Rev
Fuel Tank Capacity: 5.0 L
Fuel Consumption: 0.86 L/hr



KK-IC-750RT

Rated Power: 5.82 kW (7.8 hp)
Displacement: 418.6 cc
Speed: 3600 RPM
SFC (Max): ≤230g.kw/h
Engine: 4-Stroke
Fuel: Diesel Engine
Number of Gears: 2 Fwd, 1 Rev
Cultivation Width: 90 cm
Cultivation Depth: 6-9 cm
Fuel Tank Capacity: 5.0 L



KK-IC-406D **FMTTI**

Max Power: 5.5 kW (7.5 hp)
Displacement: 418 cc, Speed: 3500 RPM (Eng)
SFC (Max): 290g/kwh
Number of Gears: 4 Fwd (H/L), 2 Rev (H/L)
Cultivation Width: 43.7-44.0 cm
Cultivation Depth: 9.0-9.4 cm
Engine/Fuel: 4-Stroke/Diesel
Fuel Tank Capacity: 5.0 L
Fuel Consumption: 0.78 L/hr



KK-IC-406D (Electric Start)

Max Power: 5.5 kW (7.5 hp)
Displacement: 418 cc, Speed: 3500 RPM (Eng)
SFC (Max): 290g/kwh
Number of Gears: 2 Fwd, 1 Rev (H/L)
Cultivation Width: 1350 mm
Cultivation Depth: 90-94 mm
Engine/Fuel: 4-Stroke/Diesel
Fuel Tank Capacity: 5 L
Fuel Consumption: 0.78 L/hr"



BLADES - INTER-CULTIVATOR/ROTAVATOR



KK-IC-102-700-04

Machine: KK-IC-200P
Name: Dry Land(Right+Left)
Hole Distance: 70 mm
Hole Size: 10.20 mm
Thickness: 4 mm



KK-IC-110-700-06

Machine: KK-IC-200P/300/400D
Name: Wet Land(Right+Left)
Hole Distance: 70 mm
Hole Size: 11 mm
Thickness: 6 mm



KK-IC-115-700-06

Machine: KK-IC-300/400D
Name: Dry Land(Right+Left)
Hole Distance: 70 mm
Hole Size: 11.50 mm
Thickness: 6 mm



KK-IC-110-001-06

Machine: KK-IC-910D
Name: Dry Standard (Right+Left)
Hole Distance: N/A
Hole Size: 11 mm
Thickness: 6 mm



KK-IC-110-002-06

Machine: KK-IC-910D
Name: Bend (Right+Left)
Hole Distance: N/A
Hole Size: 11 mm
Thickness: 6 mm


INTER-CULTIVATOR ACCESSORIES



Potato Harvester



Row Hiller



Potato Digger



Ridger



Plough



Puddling Wheel

Fits with KK-IC-300D/KK-IC-200P/KK-IC-400D

ELECTRIC MOTORS



KK-IM4-1010

Rated Power: 0.75 kW (1 hp)
Speed: 1440 RPM
Type: Electric
Frequency: 50 Hz, Poles: 4
Voltage: 220 v
Ampere: 5.05 A
Winding: Copper



KK-IM4-1015

Rated Power: 1.1 kW (1.5 hp)
Speed: 1440 RPM
Type: Electric
Frequency: 50 Hz, Poles: 4
Voltage: 220-240 v
Ampere: 7.3 A
Winding: Copper



KK-IM4-1020

Rated Power: 1.5 kW (2 hp)
Speed: 1440 RPM
Type: Electric
Frequency: 50 Hz, Poles: 4
Voltage: 220-240 v
Ampere: 9.5 A
Winding: Copper



KK-IM4-1030

Rated Power: 2.2 kW (3 hp)
Speed: 1440 RPM
Type: Electric
Frequency: 50 Hz, Poles: 4
Voltage: 220-240 v
Ampere: 13.8 A
Winding: Copper

ENGINES - PETROL



KK-PE4-101

Rated Power: 1.9 kW (3.2 hp)
Displacement: 152 cc
Speed: 3600 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Petrol
Fuel Tank Capacity: 1.4 L
Fuel Consumption: 400 ml/hr



KK-PE4-103

Rated Power: 0.75 kW (1 hp)
Displacement: 98 cc
Speed: 3600 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Petrol
Fuel Tank Capacity: 1.3 L
Fuel Consumption: 800 ml/hr



KK-PE4-203

Rated Power: 3.8 kW (5.1 hp)
Displacement: 212 cc
Speed: 3600 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Petrol
Fuel Tank Capacity: 3.6 L
Specific Fuel Consumption: 490 g/kWh



KK-PE4-225

Rated Power: 5.21 kW (7 hp)
Displacement: 212 cc
Speed: 3600 RPM
Engine: 4-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 3.6 L
Fuel Consumption: 600 ml/hr

ENGINES - DIESEL



KK-DEV-370F

Rated Power: 3.1 kW (4.15 hp)
Displacement: 269 cc
Speed: 3600 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Diesel
Fuel Tank Capacity: 3 L
Fuel Consumption: 1480 ml/hr



KK-DEV-378F

Rated Power: 4 kW (5.36 hp)
Displacement: 296 cc
Speed: 3600 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Diesel
Fuel Tank Capacity: 3.5 L
Specific Fuel Consumption: 308 g/kWh



KK-DEV-386F

Rated Power: 5.2 kW (6.97hp)
Displacement: 406 cc
Speed: 3000 RPM
Engine: 4-Stroke, Air Cooled
Fuel Used: Diesel
Fuel Tank Capacity: 5 L
Specific Fuel Consumption: 308 g/kWh



KK-WPDV-173

Rated Power: 3.6 kW (4.8 hp)
Displacement: 247 cc
Speed: 3600 RPM
Engine: 4-Stroke, Single Cylinder
Fuel Used: Diesel
Suction Head: 7 m
Inlet Size: 50 mm (2")
Outlet Size: 50 mm (2")
Fuel Tank Capacity: 2.5 L
Fuel Consumption: 290 g/kWh



KK-WPDV-178

Rated Power: 4 kW (5.36 hp)
Displacement: 296 cc
Speed: 3600 RPM
Engine: 4-Stroke, Single Cylinder
Fuel Used: Diesel
Suction Head: 6 m
Inlet Size: 80 mm (3.1")
Outlet Size: 80 mm (3.1")
Fuel Tank Capacity: 3.5 L
Fuel Consumption: 308 g/kWh



DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

PETROL



KK-WPP-3515

(Centrifugal)
 Displacement: 37.5 cc
 Engine: 4-Stroke
 Fuel Used: Petrol
 Max. Output: 1 kW/6000R/Min
 Suction Height: 8M
 Pump Kit: 30m



KK-WPP-10

Rated Power: 1.15 kW (1.54 hp)
 Displacement: 98 cc
 Speed: 3600 RPM
 Engine: 4-Stroke
 Fuel Used: Petrol
 Suction(Vertical): 4 m (Depth)
 Fuel Tank Capacity: 1.3 L
 Fuel Consumption: 700 ml/hr



KK-WPP-15

Rated Power: 1.15 kW (1.54 hp)
 Displacement: 98 cc
 Speed: 3600 RPM
 Engine: 4-Stroke
 Fuel Used: Petrol
 Suction(Vertical): 4 m (Depth)
 Fuel Tank Capacity: 1.3 L
 Fuel Consumption: 700 ml/hr



KK-WPP-2535 (High Lift)

Rated Power: 1.15 kW (1.54 hp)
 Displacement: 98 cc
 Speed: 3600 RPM
 Engine: 4-Stroke
 Fuel Used: Petrol
 Suction(Vertical): 3 m (Depth)
 Fuel Tank Capacity: 1.3 L
 Fuel Consumption: 700 ml/hr



KK-WPP-21

Rated Power: 2.3 kW (3.1 hp)
 Displacement: 163 cc
 Speed: 3600 RPM
 Engine: 4-Stroke, Air Cooled
 Fuel Used: Petrol
 Duty Head: 18 m
 Duty Discharge: 6.94 L/s
 Suction Size: 50 mm
 Delivery Size: 50 mm
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 1035 g/h



KK-WPP-31

Rated Power: 3k W(4 hp)
 Displacement: 196 cc
 Speed: 3600 RPM
 Engine: 4-Stroke, Air Cooled
 Fuel Used: Petrol
 Duty Head: 24 m
 Duty Discharge: 8.5 L/s
 Suction Size: 80 mm
 Delivery Size: 80 mm
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 1350 g/h



KK-WPP-23

Rated Power: 2.3 kW (3.1 hp)
 Displacement: 163 cc
 Engine/Fuel: 4-Stroke/Petrol
 Inlet/Outlet Size: 50mm
 Fuel Tank Capacity: 3.6 L



KK-WPP-33

Rated Power: 3.0 kW (4.02 hp)
 Displacement: 196 cc
 Engine/Fuel: 4-Stroke/Petrol
 Inlet/Outlet Size: 80mm
 Fuel Tank Capacity: 3.6 L



KK-WPC-25

Rated Power: 2.3 kW (3.08 hp)
 Displacement: 163 cc
 Speed: 3600 RPM
 Engine: 4-Stroke ; Fuel Used: Petrol
 Suction Head: 8 m
 Inlet Size: 65 mm (2.5")
 Outlet Size: 50 mm (2")
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 450 g/kWh



KK-WPC-35

Rated Power: 3 kW (4 hp)
 Displacement: 196 cc
 Speed: 3600 RPM
 Engine: 4-Stroke ; Fuel Used: Petrol
 Suction Head: 8 m
 Inlet Size: 80 mm (3")
 Outlet Size: 65 mm (2.5")
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 490 g/kWh



KK-WPP-50080 (High Lift)

Rated Power: 3.8 kW (5.1 hp)
 Displacement: 212 cc
 Speed: 3600 RPM
 Engine: 4-Stroke
 Fuel Used: Petrol
 Suction Head: 5 m (Depth)
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 1800 ml/hr



KK-WPCI-2520

(Cast Iron Pump)
 Rated Power: 3.8 kW (5.1 hp)
 Displacement: 212 cc
 Speed: 3600 RPM
 Engine: 4-Stroke ; Fuel Used: Petrol
 Suction Head: 7 m
 Inlet Size: 65 mm (2.5")
 Outlet Size: 50 mm (2")
 Fuel Tank Capacity: 3.6 L
 Fuel Consumption: 308 g/kWh

PETROL



KK-708

FMTTI

Chemical Tank: 20 L
 Rated Power: 0.7 kW (1 hp)
 Engine: 2-Stroke
 Displacement: 25.6 cc
 Speed: 7500 RPM
 Fuel Tank Capacity: 0.750 L
 Fuel Consumption: 500 ml/hr
 Max Discharge Rate: 7.515 L/min



KK-KPS-162

FMTTI

Chemical Tank: 20 L
 Rated Power: 0.7 kW (1 hp)
 Engine: 2-Stroke
 Displacement: 25.6 cc
 Speed: 6500 RPM
 Fuel Tank Capacity: 0.750 L
 Fuel Consumption: 750 ml/hr
 Liquid Output: 7.492 L/min



KK-KPS-802

Chemical Tank: 25 L
 Rated Power: 0.7 kW (1 hp)
 Engine: 2-Stroke
 Displacement: 26 cc
 Speed: 7500 RPM
 Fuel Tank Capacity: 600 ml
 Fuel Consumption: 500 ml/hr
 Liquid Output: 8 L/min



KK-KPS-204

FMTTI

Chemical Tank: 20 L
 Rated Power: 0.7 kW (1 hp)
 Engine: 4-Stroke
 Displacement: 31.1 cc
 Speed: 6500 RPM
 Fuel Tank Capacity: 0.600 L
 Fuel Consumption: 650 ml/hr
 Liquid Output: 8.200 L/min

MANUAL

MANUAL CUM BATTERY



KK-KPS-804

FMTTI

Chemical Tank: 25 L
 Rated Power: 0.7 kW (1 hp)
 Engine: 4-Stroke
 Displacement: 21 cc
 Speed: 6500 RPM
 Fuel Tank Capacity: 0.6 L
 Fuel Consumption: 650 ml/hr
 Liquid Output: 7.370 L/min



KK-KPS-222

Rated Power: 1 kW (1.34 hp)
 Engine: 4-Stroke, Petrol Engine
 Displacement: 37.7 cc
 Speed: 6500 RPM
 Chemical Tank Capacity: 30 L
 Fuel Tank Capacity: 600 ml
 Liquid Output: 7-8 L/min
 Fuel Consumption: 650 ml/hr



KK-16LTR

FMTTI

Chemical Tank : 16 L
 Liquid Output: 750 ml/min
 Type of Cylinder: Engg Plastic



KK-BBS-318

FMTTI

Chemical Tank: 18 L
 Max Discharge Rate: 385.0 ml/min
 Battery Power: 12V, 8AH
 Extra: Voltmeter, Regulator

BATTERY



KK-BBS-201

Chemical Tank: 20 L
 Liquid Output: 7.2 L/min
 Battery Power: 12 V (12 AH)
 Charger: 1.7 A
 Extra: Robust Construction, Telescope lance, Heavy duty trigger control, High Speed Double Motor, Heavy duty tank, 1 set Extra Gun set and LED bulb 5V



KK-BBS-185

FMTTI

Chemical Tank: 18 L
 Liquid Output: 2065.0 ml/min
 Battery: 12 V DC-8 AH
 Charger: 1.0 A
 Extra: Battery, LED Light, Mobile Charger, Voltmeter, Regulator



KK-BBS-199

FMTTI

Chemical Tank: 18 L
 Max Discharge Rate: 5115 ml/min
 Battery Power: 12 V (12 AH)
 Charger: 1.17 A
 Extra: Robust Construction, Heavy Duty Trigger Control & Tank, High Speed Double Motor



KK-BBS-999

Chemical Tank: 18 L
 Liquid Output: 7.2 L/min
 Battery Power: 12 V (12 AH)
 Charger: 1.7 A
 Extra: Robust Construction, Heavy Duty Trigger Control & Tank, High Speed Double Motor



KK-PBS-299

Operation Type: Battery
 Battery: 12 V, 12 AH
 Charger: 1.7A
 Liquid Output: 7.2 L/M
 Extra: Robust Construction Inlet Hose & Big Filter High Speed Double Motor



KK-18CI3

Engine Power: 1.5-2 kW (2-2.7 hp)
Pump Speed: 800-1200 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 10-18 L/min
Pump Oil(20w40 Grade): 450 ml



KK-22CI3

FMTTI

Engine Power: 2.23 kW (3 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 25 kg/cm²
Suction Volume: 13-22 L/min
Pump Oil(20w40 Grade): 700 ml



KK-30CI3

Engine Power: 2.2-4.8 kW (3-6.5 hp)
Pump Speed: 800-1200 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 30-40 L/min
Pump Oil(20w40 Grade): 900 ml



KK-33CI3

FMTTI

3 Ball Cock of 10mm Each
Engine Power: 2.23 kW (3 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 28 kg/cm²
Suction Volume: 30 - 40 L/min
Pump Oil(20w40 Grade): 900 ml



KK-45CI3

Engine Power: 2.2-4.8 kW (3-6.5 hp)
Pump Speed: 800-1200 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 30-40 L/min
Pump Oil(20w40 Grade): 1000 ml



KK-53CI3

3 Ball Cock of 10mm Each
Engine Power: 2.2-4.8 kW (3-6.4 hp)
Pump Speed: 800-1200 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 30-40 L/min
Pump Oil(20w40 Grade): 1000 ml



KK-80CI3

Engine Power: 5.2-6.7 kW (7-9 hp)
Pump Speed: 800-1200 RPM
Output Pressure: 10-50 kg/cm²
Suction Volume: 65-80 L/min
Pump Oil(20w40 Grade): 1500 ml



KK-22X3

Pump Speed: 800-1000 RPM
Output Pressure: 10 - 40 kg/cm²
Suction Volume: 10- 22 L/min



KK-30X3

Pump Speed: 800-1000 RPM
Output Pressure: 10 - 40 kg/cm²
Suction Volume: 30- 40 L/min



KK-33X3

Pump Speed: 800-1000 RPM
Output Pressure: 10 - 40 kg/cm²
Suction Volume: 30- 40 L/min



KK-53X3

Pump Speed: 800-1000 RPM
Output Pressure: 10 - 40 kg/cm²
Suction Volume: 45- 66 L/min



KK-25CI3

Engine Power: 0.30-0.59 kW (0.4-0.8 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 9.5-10.5 L/min
Pump Oil(20w40 Grade): 900 ml



KK-35CI3

Engine Power: 1.49-2.23 kW (2-3 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 16.5-20.5 L/min
Pump Oil(20w40 Grade): 900 ml



KK-38CI3

Engine Power: 1.49-2.23 kW (2-3 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 16.5-20.5 L/min
Pump Oil(20w40 Grade): 900 ml



KK-58CI3

Engine Power: 1.49-2.23 kW (2-3 hp)
Pump Speed: 800-1000 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 16.5-20.5 L/min
Pump Oil(20w40 Grade): 1000 ml

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

PETROL



KK-PSP-18

HTP Sprayer: KK-18CI3
Engine: KK-PE4-103 (Petrol)
Rated Power: 1.5-2 Kw (1.1-1.4 hp)
Displacement: 98 cc



KK-PSP-22 **FMTTI**

HTP Sprayer: KK-22CI3
Engine: KK-PE4-163 (Petrol)
Rated Power: 2.3 kW(3.1 hp)
Displacement: 163 cc



KK-PSP-30 **FMTTI**

HTP Sprayer: KK-30CI3
Engine: KK-PE4-203 (Petrol)
Rated Power: 3 kW(4.02 hp)
Displacement: 196 cc



KK-PSP-25

HTP Sprayer: KK-25CI3
Engine: KK-PE4-163 (Petrol)
Rated Power: 2.3 kW(3.1 hp)
Displacement: 163 cc

PETROL



KK-PSP-15

HTP Sprayer: KK-18CI3
Engine: KK-PE4-103 (Petrol)
Rated Power: 1.5-2 kW(1.1-1.4 hp)
Displacement: 98 cc



KK-PSP-22X3

Rated Power: 4.84 kW (6.5 hp)
Displacement: 196 cc
Engine: 4-Stroke, Petrol Engine
Fuel Tank: 3.6 L
Pump Speed: 800-1000 RPM
Out Pressure: 10-40 kg/cm²
Suction Volume: 10 - 22 L/min



KK-PSP-202T

Rated Power: 4.84 kW (6.5 hp)
Displacement: 196 cc
Engine: 4-Stroke, Petrol Engine
Engine Speed: 3600 RPM
Fuel Tank: 3.6 L
Spray Speed: 800-1200 RPM
Suction Volume: 9.5-10.5 L/min
Pressure: 1.5-3.5 kg/cm²

ELECTRIC



KK-PSE-22X3

Rated Power: 1.5 kW (2 hp)
Motor Speed: 1400 RPM
Pump Speed: 800-1000 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 10-22 L/min

ELECTRIC




KK-PSE-30X3


Rated Power: 2.2 kW (3 hp)
Motor Speed: 1400 RPM
Pump Speed: 800-1200 RPM
Output Pressure: 10-40 kg/cm²
Suction Volume: 30-40 L/min



Heavy Duty Delivery Hose
8.5mm: 25, 50, 100 m
10mm: 100 m



Boom Lance



HTP Base Frame
Medium duty
(Using Steel Pipes)



Hose Crimping Machine
(8.5, 10mm)



Base stand
Heavy Duty
(Using Steel Angles & Channels)




Hose Reel

Spray Guns



Turbo Gun



Axle Gun



Bent Gun



KK-EUG-30

Nozzles: Different Types
Guns: 1', 1.5', 2', 3', 5', 10', 24'



KK-P768

FMTTI

Rated Power: 0.7 kW (1 hp)
Displacement: 26 cc
Speed: 7000 RPM
Engine Type/Fuel: 2-Stroke/Petrol
Fuel Tank Capacity: 0.75 L
Fuel Consumption: 500 ml/hr
Suction Volume: 7-8 L/min



KK-PPS-P769

Rated Power: 0.7 kW (1 hp)
Displacement: 34 cc
Speed: 7500 RPM
Engine Type/Fuel: 2-Stroke/Petrol
Fuel Tank Capacity: 600 ml
Fuel Consumption: 500 ml/hr
Suction Volume: 9 L/min



KK-P780

Rated Power: 0.75 kW (1 hp)
Displacement: 43 cc
Speed: 7500 RPM
Engine Type/Fuel: 2-Stroke/Petrol
Fuel Tank Capacity: 1 Ltr
Fuel Consumption: 500 ml/hr
Suction Volume: 9 L/min



KK-P968

FMTTI

Rated Power: 1 kW (1.35 hp)
Displacement: 98 cc
Speed: 3600 RPM
Engine Type: 4-Stroke
Fuel: Petrol Start & Kerosene Run
Fuel Tank Capacity: 1.3 L
Fuel Consumption: 800 ml/hr
Suction Volume: 12.3 L/min



KK-PPS-P764

FMTTI

Rated Power: 0.7 kW (1 hp)
Displacement: 31 cc
Speed: 6500 RPM
Engine Type/Fuel: 4-Stroke/Petrol
Fuel Tank Capacity: 0.600 L
Fuel Consumption: 500 ml/hr
Suction Volume: 7-8 L/min



KK-P999

Rated Power: 4.2 kW (5.5 hp)
Displacement: 163 cc
Speed: 1800 RPM(Engine)
Engine Type: 4-Stroke
Fuel: Petrol
Fuel Consumption: 1000 ml/hr
Suction Volume: 24 L/min



KK-P777

Rated Power: 1 kW (1.34 hp)
Displacement: 37.7 cc
Speed: 6500 RPM
Engine: 4-Stroke, Petrol Engine
Fuel Tank Capacity: 600 ml
Fuel Consumption: 650 ml/hr
Suction Volume: 15-30 L/min



ELECTRIC

KK-P898E

Rated Power: 0.8 kW (1 hp)
Speed: 2800 RPM
Frequency: 50 Hz
Voltage: 220 V
Ampere: 3.7 A

ORCHARD SPRAYERS



KK-ABOS-0750

Required Power : ≥ 8.95 kW (18-25 hp)
Mating Power: 4.47 kW (6 hp)
Pump Speed: 500 - 600 RPM
Chemical Tank: 750 L
Spray Range: ≥ 20 m (h), ≥ 6 m (v)
Nozzles: 10
Pump Flow Rate: 60 L/min
Working Pressure: 25 bar
Ventilation Fan Dia: 600 mm
Hand Wash Tank: 15 L
Flush Tank: 100 L

KK-ABOS-0600

Required Power: 11 kW (15 hp)
Chemical Tank: 600 L
Spray Range: 10 m
Nozzles: 10
Pump Flow Rate: 54 L/min
Working Pressure: 0-4 MPa
Ventilation Fan Dia: 600 mm
Hand Wash Tank: 10 L
Flush Tank: N/A



DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

TEA LEAF HARVESTERS - ELECTRIC



KK-TH-4C30A

Battery: DC 24V, 12Ah
(Lithium Battery)
Power: 300W (Brushless Motor)
Blade Length: 300 mm



KK-TH-33A

Battery: DC 24V, 10Ah
(Lithium Battery)
Power: 300W (Brushless Motor)
Blade Length: 330 mm



KK-HTP-600

Rated Power: 0.74 kW (1 hp)
Displacement: 25.4 cc
Speed: 2300 (No-load Speed) Idle
Engine Type: 2-Stroke, Petrol,
Single Cylinder
Fuel Used: Petrol
Fuel Tank Capacity: 600ml
Fuel Consumption: 600ml/hr



KK-HTE-600 (Electric)

Input Power: 600 W
Cutting Length: 510 mm
Voltage: 220-240V
Frequency: 50 Hz
Max Cutting Dia. : 16 mm
No Load Speed: 1750/min

LEAF BLOWERS



KK-LBV-260

Rated Power: 0.74 kW (1 hp)
Displacement: 26 cc
Speed: 7500 RPM
Engine: 2-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 600 ml
Average Air Volume: 130 L/sec



KK-LBV-650

Rated Power: 2.7 kW (3.62 hp)
Displacement: 63 cc
Speed: 6800 RPM
Engine: 2-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 1200 ml
Average Air Volume: 300 L/sec



TEA PRUNER

KK-TC2-8641

Rated Power: 1.25 kW (1.7 hp)
Displacement: 40 cc
Speed: 7000 RPM
Engine: 2-Stroke, Air Cooled,
Vertical Piston Valve, Gasoline
Fuel Used: Petrol mixed with
Lubricating oil (40:1)
Fuel Tank Capacity: 1100 ml
Fuel Consumption: 0.75 ml/hr

BRUSH CUTTERS-TROLLEY TYPE

KK-BC2-52T

Rated Power: 1.47 kW (1.97 hp)
Displacement: 52 cc
Speed: 6500 RPM
Engine: 2-Stroke, Petrol
Fuel Tank Capacity: 1.2 L



KK-BC4-35T

Rated Power: 1 kW (1.34 hp)
Displacement: 37.7 cc
Speed: 6500 RPM
Engine: 4-Stroke, Petrol
Fuel Tank Capacity: 1.2 L





KK-BC-8640 **FMTTI**

Walbro Carburetor
 Rated Power: 1.14 kW (1.5 hp)
 Displacement: 42.7 cc
 Speed: 6600 RPM
 Engine: 2-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 1.1 L
 Fuel Consumption: 0.75-0.77 L/hr



KK-BC-7640 **FMTTI**

Rated Power: 1.14 kW (1.5 hp)
 Displacement: 40 cc
 Speed: 6600 RPM
 Engine: 2-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 1.1 L
 Fuel Consumption: 0.85 L/hr



KK-BC2-8665 **FMTTI**

Rated Power: 2 kW (2.68 hp)
 Displacement: 63.3 cc
 Speed: 7500 RPM
 Engine: 2-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 1.3 L
 Fuel Consumption: 0.79 L/hr



KK-BC4-8634 **FMTTI**

Rated Power: 0.42 kW (0.56 hp)
 Displacement: 34 cc
 Speed: 7800 RPM
 Engine: 4-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 0.65 L
 Fuel Consumption: 0.318 L/hr



KK-BC4-8635

Rated Power: 1 kW (1.34 hp)
 Displacement: 35.8 cc
 Speed: 2800 - 3000 RPM
 Engine: 4-Stroke
 Fuel Used: Petrol
 Fuel Tank Capacity: 0.65 L



KK-BC-555

Rated Power: 1.45 kW (1.94 hp)
 Displacement: 51.7 cc
 Engine: 2-Stroke
 Fuel Used: Petrol
 Fuel Tank Capacity: 1400 ml
 Fuel Consumption: 800 ml/hr



KK-BC4-8637

Rated Power: 0.9 kW (1.2 hp)
 Displacement: 34 cc
 Speed: 7800 RPM
 Engine: 4-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 650 ml
 Fuel Consumption: 0.72 L/hr

SHOULDER MOUNTED



KK-SBC-4302 **FMTTI**

Rated Power: 1.5 kW (2 hp)
 Displacement: 43 cc
 Speed: 6500 RPM
 Engine: 2-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 0.9 L
 Fuel Consumption: 0.65 L/hr



KK-SBC-3804

Rated Power: 1.0 kW (1.34 hp)
 Displacement: 37.7 cc
 Engine: 4-Stroke
 Fuel Used: Petrol
 Fuel Tank Capacity: 1.3 L




KK-SBC-3404

Rated Power: 0.9 kW (1.2 hp)
 Displacement: 34 cc
 Speed: 7800 RPM
 Engine: 4-Stroke, Air Cooled
 Fuel Used: Petrol
 Fuel Tank Capacity: 700 ml
 Fuel Consumption: 500 ml/hr

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

PALM HARVESTER

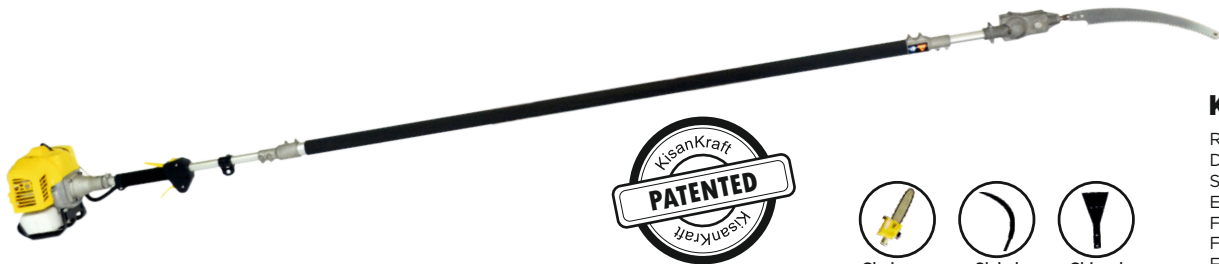

Chainsaw



Sickel



Chiesel

KK-PH2-215 **FMTTI**

Rated Power: 0.32 kW (0.43 hp)
Displacement: 25.4 cc
Speed: 7000 RPM
Engine: 2-Stroke, Air Cooled
Fuel Used: Petrol
Fuel Tank Capacity: 800 ml
Fuel Consumption: 0.784 L/hr

OTHER ACCESSORIES



2 Point Blade



3 Point Blade
(Pointed)



3 Point Blade
(Standard)



Heavy Duty
TCT Saw Blades



TCT & NON TCT Saw Blades

TCT Saw Blades: 8", 10", 12" Dia
Teeth: 40, 60, 80, 100, 120 etc.
NON TCT Saw Blades: 8", 10" Dia
Teeth: 60, 80, 100, 120 etc.



Paddy Guards



Nylon Ropes
(15 & 40 m)

Square □
Star ☆
Round ○



Nylon Ropes
(280 m)

PADDY WEEDERS



PADDY WEEDER

Attachment for Agriculture Reaper
Blade Style: Teeth Blade
Blade: 9 Sheet
Width: 590-600 mm
Diameter: 310 mm
Pipe Diameter: 28mm
Gear Case: Heavy Duty Gear
Connection Diameter: 8 mm
Teeth: 9T-Star



KK-PW-01

Agriculture Paddy Weeder Attachment
Blade Style: 10T
Blade: 2 Blade (20 Nos)
Width: 170mm
Diameter: 196mm
Pipe Diameter: 26mm
Gear Case: Normal
Connection Diameter: 29mm
Teeth: Square



HOE CUTTERS



KK-HC-3526

Blade Style: Bevel Blade
Blade: 12 Nos
Width: 340-350 mm
Diameter: 180 mm
Outer Dia: 26 mm
Drive Shaft: 8 mm
Teeth: 9T-Star
Gear Shaft Length: 14.5 cm



KK-HC-3528

Blade Style: Bevel Blade
Blade: 2 Nos
Width: 340-350 mm
Diameter: 180 mm
Outer Dia: 28 mm
Drive Shaft: 8 mm
Teeth: 9T-Star



KK-HC-2126

Blade Style: Direct Blade
Blade: 12 Nos
Width: 270-290 mm
Diameter: 150 mm
Outer Dia: 26 mm
Drive Shaft: 8 mm
Teeth: 9T-Star
Gear Shaft Length: 14.5 cm



KK-HC-2128

Blade Style: Direct Blade
Blade: 12 Nos
Width: 270-290 mm
Diameter: 150 mm
Outer Dia: 28 mm
Drive Shaft: 8 mm
Teeth: 9T-Star



KK-HC-1528

Blade Style: Direct Blade
Blade: 6 Nos
Width: 150-180 mm
Diameter: 180 mm
Outer Dia: 28 mm
Drive Shaft: 8 mm
Teeth: 9T-Star
Gear Shaft Length: 14.5 cm

POST HOLE DIGGERS



KK-PPDE-71

FMTTI

1-Man Operated
Rated Power: 2.23kW (3.0 hp)
Displacement: 71cc
Engine: 2-Stroke, Air Cooled, Petrol
Speed : 8500 RPM
Fuel Tank Capacity: 0.8 L
Fuel Consumption: 0. 650 L/hr
Output Performance: 40-52 Pits/hr



KK-PPDE-62

1-Man Operated
Rated Power: 2kW (2.7 hp)
Displacement: 62cc
Engine: 2-Stroke, Air Cooled, Petrol
Speed: 300 RPM
Fuel Tank Capacity: 1200ml



KK-PPDE-52

1-Man Operated
Rated Power: 1.4 kW (1.87 hp)
Displacement: 51.7 cc
Engine: 2-Stroke, Air Cooled, Petrol
Engine Speed: 8500 RPM
Bit Steed: 0 - 280 RPM
Fuel Tank Capacity: 800ml
Fuel Consumption: 650ml/hr
Output Performance: 40-52 pits/hr

AUGER BITS



Sizes Available

4 Inch
6 Inch
8 Inch
10 Inch
12 Inch

THERMAL FOGGING SPRAYERS



KK-TF-8605

Operation Mode: Self Start Gas
Assisted by Electronic Lighter
Fuel Used: Butane Gas
Combustion Power/Consumption:
500ml/3 hrs of Butane Gas
Spraying: (Chemical+Diesel) Mixture
Chemical/Fuel Tank Capacity: 2 L Chemical Tank
Particle size: 5-30 Microns
Fogging Capacity:13 L/hr



KK-TF-8625S (Stainless Steel)

Operation Mode: Self start &
Manual Start -Assisted by Petrol
Combustion Power/Consumption:
18.5 kW/hr/750ml/hr
Fuel Used: Petrol
Spraying: (Chemical+Diesel) mixture
Chemical Tank Capacity: 6 L
Fuel Tank Capacity: 1.2 L (Petrol)
Fogging Capacity: 25 L/hr
Particle Size: 10-50 Microns



KK-STF-480

Chemical: 8*2 Ltr SS
Fuel Tank: 2 Ltr SS
Starting: Manual & Electric
Battery: 12V 2.6Ah
Net Weight: 11.5 Kgs
Fuel Consumption: 2.6 L/H
Fogging Capacity: 1.5 L/M

COLD FOGGING SPRAYERS



KK-ULV-4000

Tank Capacity: 4L
Tank Material: PE
Droplet Size: 5-30 microns
Voltage: 110-220V
Rotate: 20000 RPM
Flow Rate: 19 L/H
Horizontal Range: 15M
Dimension: 365x285x450 mm



KK-ULV-5000

Tank Capacity: 5L
Tank Material: PE
Droplet Size: 5-50 microns
Voltage: 110-220V
Rotate: 20000 RPM
Flow Rate: 19 L/H
Horizontal Range: 20M
Dimension: 365x285x430 mm

CHAFF CUTTER



KK-FMC-500

FMTTI

HP (Electric Motor): 3 HP
HP (Diesel Engine): 3.7 kW (5 hp)
Speed: 1400 RPM
Maximum Output-Dry: 709 kg/hr

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

MILKING MACHINE



KK-MLK-VB1

Motor: 1.1 kW (1.5 hp)
 Pump: Vacuum
 Pulsator: 1(L-80)
 Tank: 1
 Tank Size/Weight: 25 L/3 kg
 Tank Material: SS-304
 (Stainless Steel)
 Vacuum Speed: 200 L/min
 Milk Claw: 280 cc with Plastic Chasis
 Animal: Cow & Buffalo
 Output Capacity: 3 L/min

ELECTRIC RUN



KK-LME-1400

Rated Power: 1.4 kW (1.8 hp)
 Type of Operation: Manual Push
 Source of Power: Electricity
 Speed: 2900 RPM
 Voltage: 230-240 V (50 Hz)
 Cutting Width: 380 mm
 Cutting Height: 25-75 mm
 Height Adjustment: 6
 Grass Catcher: 40 L



KK-LME-1800

Rated Power: 1.8 kW (2.4 hp)
 Type of Operation: Manual Push
 Source of Power: Electricity
 Speed: 2900 RPM
 Voltage: 230-240 V (50 Hz)
 Cutting Width: 460 mm
 Cutting Height: 25-75 mm
 Height Adjustment: 7
 Grass Catcher: 60 L

PETROL RUN



KK-LME-1900

Rated Power: 1.8 kW (2.4 hp)
 Type of Operation: Self Propelled
 Source of Power: Electricity
 Speed: 2900 RPM
 Voltage: 230-240V (50 Hz)
 Cutting Width: 460 mm
 Cutting Height: 25-75 mm
 Height Adjustment: 7
 Grass Catcher: 60 L



KK-LMP-6416

Rated Power: 3 kW (4 hp)
 Displacement: 135 cc
 Engine Type: 4-Stroke
 Fuel: Petrol ; Speed: 2800 RPM
 Type of Operation: Manual Push
 Fuel Tank Capacity: 1.2 L
 Cutting Width: 400 mm
 Cutting Height: 25-75 mm
 Height Adjustment: 10
 Grass Catcher: 50 L



KK-LMP-6419

Rated Power: 3kW (4hp)
 Displacement: 135cc
 Engine Type: 4-Stroke
 Fuel: Petrol ; Speed: 2800 RPM
 Type of Operation: Self Propelled
 Fuel Tank Capacity: 1.2 L
 Cutting Width: 460 mm
 Cutting Height: 30-75 mm
 Height Adjustment: 7
 Grass Catcher: 60L

MANUAL RUN



KK-LMM-350

Cutting Width: 350 mm (14")
 Height Adjustment: 15-42 mm
 Grass Catcher (Plastic): 34 L
 Wheel Drive: 2



KK-LMM-400

Cutting Width: 400 mm (16")
 Height Adjustment: 15-42 mm
 Grass Catcher (Plastic): 34 L
 Wheel Drive: 2



KK-LMM-450

Cutting Width: 450 mm (18")
 Height Adjustment: 31-62 mm
 Grass Catcher: 10 L
 Wheel Drive: 4

HEDGE SHEAR



KK-AHS-2135

Telescopic
Blade Material: 65Mn Carbon Steel
Blade Length: 63 cm (25")
Blade Thickness: 4.3 mm
Hardness: 56 +/-2 HRC
Full Length: 79 cm (31")
Handle: Oval Steel
Grip: 1 Colour PVC

LOPPERS



KK-ALOP-2504

Telescopic
Blade Material: 50 Mn Carbon Steel
Blade Length: 27 cm (11")
Blade Thickness: 4.7 mm
Hardness: 50-52 deg
Full Length: 71 cm (28")
Handle: Oval Steel
Grip: 2 Color PP+TPR



KK-ALOP-3505

Telescopic
Blade Material: 65 Mn Carbon Steel
Blade Length: 27 cm (11")
Blade Thickness: 4.3 mm
Hardness: 56 +/-2 HRC
Full Length: 79 cm (31")
Handle: Oval Steel
Grip: 1 Colour PVC

PRUNING SAW



KK-AFS-JP02

Folding Pruning Saw
Material: Sk5 Japan Steel
Blade Length: 21 cm (8.3")
Blade Width: 3.5 cm (1.38")
Teeth: 3 Surface Automatic
Machine Grinding
Grip: Soft/Hard
Full Length: 43 cm (16.9")
Safety Lock: Yes

SHEEP SHEAR



KK-SS02

PRUNING SHEARS & SECATEURS



KK-APS-B1318

(Bypass Type)



KK-APS-A1215

(Anvil Type)



KK-APS-G05



KK-TSP-525

+
KK-FPB-107



KK-ATP-9210 (Manual)

Material: 50# Carbon Steel
Length/Thickness: 33 cm/ 2mm
Handle: Steel Telescopic
Hardness: 50 ± 2 HRC
Full Length: 1.2 - 2.4 m
Cutting Size: 25 mm

PRESSURE SPRAYERS (Models Available in: 1, 1.5, 2, 3, 5, 8L)



KK-TS1000

(Hand Operated)



KK-PS1000

(Hand Operated)



KK-PS1500

(Hand Operated)



KK-PS2000

(Hand Operated)



KK-PS3000



KK-PS5000



KK-PS8000

WATERING CANS (Models Available in: 1, 1.5, 2, 3, 5, 8L)



KK-MSP-6180

(1.80 Liters)



KK-MSP-6100

(0.90 Liters)



KK-MSP-6300

(3 Liters)

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

INTER-CULTIVATORS



FB-IC-409D

Rated Power: 6.7 kW (9 hp)
Displacement: 406 cc
Speed: 3600 RPM
Number of Gears: 2 Fwd, 1 Rev
Cultivation Width: 80-135 cm
Cultivation Depth: 2.5-15.2 cm
Engine/Fuel: 4-Stroke/Diesel
Fuel Tank Capacity: 5.5 L



FB-IC-209P

Rated Power: 4.8 kW (6.5 hp)
Displacement: 196 cc
Speed: 3600 RPM
Number of Gears: 2 Fwd, 1 Rev
Cultivation Width: 90 cm
Cultivation Depth: 2.6-16 cm
Engine/Fuel: 4-Stroke/Petrol
Fuel Tank Capacity: 3.6 L

WATER PUMPS



FB-WPP-21

Rated Power: 3 kW (4 hp)
Inlet/Outlet (Dia): 50 mm(2")
Delivery (Horizontal): 30 m
Speed: 3600 RPM
Suction (Vertical): 8 m
Engine: 4-Stroke
Fuel Used: Petrol



FB-WPP-31

Rated Power: 4.3 kW (5.8 hp)
Inlet/Outlet (Dia): 80 mm(3")
Delivery (Horizontal): 30 m
Speed: 3600 RPM
Suction (Vertical): 8 m
Engine: 4-Stroke
Fuel Used: Petrol

ENGINE



FB-PE4-226

Rated Power: 5.1 kW (7 hp)
Displacement: 210 cc
Speed: 3600 RPM
Engine: 4-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 3.6 L



FB-KPS-204

Rated Power: 0.7 kW (1 hp)
Displacement: 31 cc
Speed: 7500 RPM
Engine/Fuel: 4-Stroke/Petrol
Suction Volume: 9 L/min
Chemical Tank Capacity: 20 L
Fuel Tank Capacity: 900 ml
Fuel Consumption: 500 ml/hr



FB-P764

Rated Power: 0.7 kW (1 hp)
Displacement: 26cc
Speed: 7500 RPM
Engine/Fuel: 4-Stroke/Petrol
Fuel Tank Capacity: 900 ml
Fuel Consumption: 500 ml/hr



FB-P768

Rated Power: 0.7 kW (1 hp)
Displacement: 26cc
Speed: 7500 RPM
Engine/Fuel: 2-Stroke/Petrol
Fuel Tank Capacity: 600 ml
Fuel Consumption: 500 ml/hr

POWER SPRAYERS

BRUSH CUTTERS



FB-SBC-8604

Rated Power: 1.0 kW (1.34 hp)
Displacement: 37.7 cc
Engine: 4-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 1 L



FB-BC-8648

Rated Power: 1.45 kW (1.94 hp)
Displacement: 51.7 cc
Engine: 2-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 1.2 L
Fuel Consumption: 800 ml/hr




FB-BC-8652

Rated Power: 1.6 kW (2.2 hp)
Displacement: 52 cc
Engine: 2-Stroke, Air Cooled
Fuel Used: Petrol
Fuel Tank Capacity: 1.2 L
Fuel Consumption: 850 ml/hr



FB-BC-3504

Rated Power: 1.0 kW (1.35 hp)
Displacement: 37.7 cc
Engine: 4-Stroke
Fuel Used: Petrol
Fuel Tank Capacity: 1 L

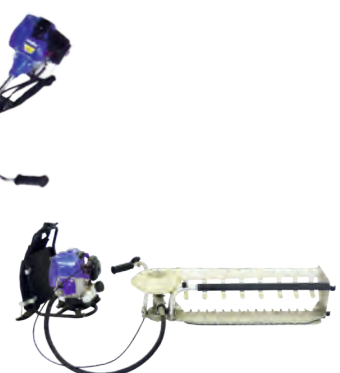

FB-TH-602

Rated Power: 0.75 kW (1 hp)
Engine: 2-Stroke, Petrol
Displacement: 25.4 cc
Speed: 7500 RPM
Cutter Bar Length: 600mm

TEA LEAF HARVESTER

ANGLE GRINDERS

AY-PAG-100A

Volt/Freq.: 220 V/50 Hz
 Wheel/Hole Diameter: 100/16 mm
 Power: 750 W
 Speed: 11000 RPM


AY-PAG-101N

Volt/Freq.: 220 V/50 Hz
 Wheel/Hole Diameter: 100/115/125 mm
 Power: 850 W
 Speed: 11000 RPM


AY-PAG-101X

Volt/Freq.: 220 V/50 Hz
 Wheel/Hole Diameter: 100/115/125 mm
 Power: 850 W
 Speed: 11000 RPM


AY-PAG-125A

Volt/Freq.: 220 V/50 Hz
 Wheel/Hole Diameter: 125 mm / 22 mm
 Power: 1200 W
 Speed: 11800 RPM

MIXTURE DRILL

AY-PMD-950G

Volt/Freq.: 220 V ~ /50 Hz
 Power: 950 W
 Speed: 0-900 RPM
 Chuck Size: 120 mm


AY-PCV-035N

Volt/Freq.: 220 V/50 Hz
 Hose Dia: 35 mm
 Length: 1.5 Mtr
 Power: 650 W
 Speed: 4000 RPM


AY-PCV-353

Rated input power: 1200W
 Rated Voltage: 220-100 V
 No-Load Speed: 4000 RPM
 Hose Diameter: 38 mm
 Hose Length: 5 m

HEAVY DUTY
 FOR PROFESSIONAL USE

CONCRETE VIBRATOR ACCESSORIES

Also available with Petrol Engine


Motor - AY-ECV-30

Speed: 2840 RPM
 Rated Power: 1.5 kW (2 hp)
 Frequency: 50 Hz
 Voltage: 220 V | Ampere: 9.44 A


Frame

AY-EF-1


Coupling

AY-EH-B220


Needles (4 & 6 meter)

AY-CVN-3840
 AY-CVN-3860
 AY-ECVN-3841
 AY-ECVN-3861

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

MARBLE CUTTERS

AY-PMC-110A

Volt/Freq.: 220 V/50 Hz
 Disc Diameter: 110 mm
 Cutting Capacity: 34 mm
 Power: 1150 W
 Speed: 13300 RPM


AY-PMC-111N

Volt/Freq.: 220 V/50 Hz
 Blade Diameter: 110 mm
 Cutting Capacity: 30 mm
 Power: 1240 W
 Speed: 13000 RPM


AY-PMC-125N

Volt/Freq.: 220 V/50 Hz
 Blade Diameter: 125 mm
 Cutting Depth: 40 mm
 Angle: 0-45°
 Power: 1400 W
 Speed: 13000 RPM


AY-PCS-185N

Volt/Freq.: 220 V/50 Hz
 Blade Diameter: 185 -190 mm
 Cutting Depth: 64 mm
 Angle: 0-45°
 Power: 1400 W
 Speed: 5300 RPM

ELECTRIC JIG SAW

AY-JS-70G

Volt/Freq.: 220 V ~ /50 Hz
 Power: 710 W
 Speed: 0-3000 RPM
 Cutting Capacity: 70 mm


AY-JS-82G

Volt/Freq.: 220 V ~ /50 Hz
 Power: 650 W
 Speed: 0-3100 RPM
 Cutting Capacity: 85 mm


AY-PLN-820G

Volt/Freq.: 220 V/50 Hz
 Power: 710 W
 Speed: 16500 r/min
 Cutting Capacity: 82x2 mm


AY-ER-12G

Volt/Freq.: 220 V/50 Hz
 Power: 1800 W
 Speed: 0-23000 RPM
 Cutting Capacity: 8-12 mm

SCREW DRIVER

AY-SD-10G

Volt/Freq.: 220 V ~ /50 Hz
 Input Power: 400 W
 Speed: 0-1100 RPM
 Chuck Size: 10 mm

CORDLESS DRILL

AY-CD-12C

Battery: 1.3AH, 12V
 No Load Speed: 350-1300 RPM
 Steel/Wood Drill Capacity: 10/25mm
 Max Screwing Diameter: 7mm

HEAT GUN

AY-HG-2000G

Voltage: 220 V ~
 Frequency: 50 Hz
 Power: 2000 W

SPRAY GUN

AY-PSG-44G

Volt/Freq.: 220 V/50 Hz
 Cup Capacity: 600 cc
 Max Operating Pressure: 7.0 Bar
 Working Pressure: 26 Bar
 Speed: 16500 r/min

WALL CHASER

AY-WC-3300G

Volt/Freq.: 220 V-/50-60 Hz
 Power: 3000 W
 Max Load Power: 4300 W
 Speed: 5000 RPM
 Cutting Capacity: 42mm(W)/41mm(D)

ELECTRIC BLOWERS & VACUUMS

AY-ELB-600W

Volt / Frequency: 220V ~ /50 Hz
 Power: 600 W
 Gas Volume: 2.8 m³/ min
 Speed: 16000 RPM


AY-EB-40G

Volt / Frequency: 220V ~ /50 Hz
 Power: 580 W
 Gas Volume: 2.3m³
 Speed: 0-13000 RPM

VACUUM CLEANERS - Wet & Dry Brush

AY-VC-35L

Capacity: 35 L
 Power: 1500 V
 Double Stage Motor
 Voltage: 220 V / 50 HZ
 Vacuum Suction: 200 mbar
 Air Flow Rate: 53 L/S


AY-VC-80L

Capacity: 80 L
 Power: 4500 V
 Voltage: 220 V / 50 HZ
 Double Stage Motor | Triple Motor
 Vacuum Suction: 250 mbar
 Air Flow Rate: 120 L/S


AY-VC-100L

Capacity: 100 L
 Power: 4500 V
 Voltage: 220 V / 50 HZ
 Double Stage Motor | Triple Motor
 Vacuum Suction: 250 mbar
 Air Flow Rate: 120 L/S

AIR COMPRESSORS

AY-AC-30X

Air Flow: 178 L/Min
 Pressure: 8 Bar
 Piston: 42 mm
 Stroke: 35 mm
 Power: 1.5 hp
 Tank Size: 24 L
 Motor: Aluminium


AY-AC-50X

Air Flow: 195 L/Min
 Pressure: 8 Bar
 Piston: 47 mm
 Stroke: 35 mm
 Power: 2 hp
 Tank Size: 50 L
 Motor: Aluminium

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

IMPACT DRILLS

AY-PID-013N

Volt/Freq.: 220 V/50 Hz
 Drill: 13 mm Steel / 20 mm Wood
 Power: 600 W
 Speed: 1200 RPM


AY-PID-013G

Volt/Freq.: 220 V/50 Hz
 Drill: 13 mm
 Power: 750 W
 Speed: 2800 RPM


AY-PID-010G

Volt/Freq.: 220 V/50 Hz
 Drill: 10 mm
 Power: 350 W
 Speed: 4500 RPM


AY-PID-065G

Volt/Freq.: 220 V/50 Hz
 Drill: 6.5 mm
 Power: 350 W
 Speed: 4500 RPM

ROTARY HAMMERS

AY-PHD-020A

Volt/Freq.: 220 V/50 Hz
 Drill: 20 mm
 Power: 500 W
 Speed: 850 RPM


AY-PHD-026N

Volt/Freq.: 220 V/50 Hz
 Drill: 26 mm
 Power: 750 W
 Speed: 500 RPM

CUT-OFF MACHINES

AY-PCO-355C

Volt/Freq.: 220 V/50 Hz
 Wheel Diameter: 355 mm
 Power: 1800 W
 Speed: 3800 RPM

HEAVY DUTY
 FOR PROFESSIONAL USE

AY-PCO-335X

Volt/Freq.: 220 V/50 Hz
 Wheel Diameter: 355 mm
 Power: 2600 W
 Speed: 3800 RPM


AY-PCO-355A

Volt/Freq.: 220 V/50 Hz
 Wheel Diameter: 355 mm
 Power: 2100 W
 Speed: 3900 RPM


AY-PCO-355B

Volt/Freq.: 220 V/50 Hz
 Wheel Diameter: 355 mm
 Power: 2200 W
 Speed: 3800 RPM

DEMOLITION HAMMERS

AY-PDH-11E

Volt/Freq.: 220 V - /50 Hz
 Impact Energy: 6-25 Joules
 Impacts/Min: 0-1300
 Capacity: 11 Kg
 Power: 1500 W


AY-PDH-840N

Volt/Freq.: 220 V/50 Hz
 Impact Energy: 10 Joules
 Impacts/Min: 3500
 Capacity: 7 Kg
 Power: 1100 W


AY-DM-65G

Volt/Freq.: 220 V - /50 Hz
 Cylinder Dia: 45 mm
 Capacity: 16 Kg
 Power: 1650 W

ARC WELDING MACHINES (IGBT)

AY-WM-200(MINI)

Rated Voltage: 220 V
 (Single Phase)
 Single PCB IGBT Inverter
 IGBT: 40N60*2 pcs
 Output Diode: D92*2 pcs
 Capacitor: 300UF/400V*2 pcs


AY-WM-200A

Rated Voltage: 220 V
 (Single Phase)
 Single PCB IGBT Inverter
 IGBT: 40N60*2 pcs
 Output Diode: D92-02*3 pcs
 Capacitor: 330UF/400V*3 pcs


AY-WM-250A

Rated Voltage: 220 V
 (Single Phase)
 Single PCB IGBT Inverter
 IGBT: 60N60*2 pcs
 Output Diode: 60F30 *3 pcs
 Capacitor: 330UF/400V*3 pcs


AY-WM-275A

Rated Voltage: 220 V
 (Single Phase)
 Single PCB IGBT Inverter
 IGBT: 40N60*4 pcs
 Output Diode: 60F30 *3 pcs
 Capacitor: 390UF/400V*3 pcs


AY-WM-300A

Input Voltage: 220 V
 (Single Phase)
 Single PCB IGBT Inverter
 IGBT: 60A/600 V*4 pcs
 Output Diode: 60A/300V *4 pcs
 Capacitor: 470UF/400V*6pcs
 with MCB, 2 Knobs


AY-WM-400MIG

IGBT 50A/1200V*2 PCS
 Diode FFA60UP30DN*8 PCS
 Earth clamp with 2.5M Cable
 Electrode Holder
 with 2.5M Cable (35mm2)
 Torch MB36KD Euro Connector
 AC36V Regulator
 Phase: Three Phase


AY-WM-200MA (MOSFET)

Input Voltage: 220 V (Single Phase)
 Top Card: 18N50 *12 pcs
 Middle Card: D92M-02*12 pcs
 Transformer: *3 pcs
 Bottom Card Capacitor: 470UF/400V
 *4 pcs, 1 pcs 35A
 Bridge Diode with Heatsink, NTC


AY-WMH-333

Power: AC 220 V (±15%)
 Frequency: 50/60Hz
 Input Current: 18 A
 Phase: 1 PH
 Rated Input: 3.9 A
 Amperage Range: 20-120 A
 Open Circuit Voltage: 24.8 V

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

PORTABLE PRESSURE WASH SPRAYERS

AY-PWIH-060

Motive Power: 1.3 kW (1.74 hp)
 Power Supply: 220 V
 Rotating Speed: 2800 RPM
 Motor Type: Induction
 Max Pressure: 100 Bar
 Theoretical Flow: 10 L/Min


AY-PWIH-888

Motive Power: 2.6 kW (3.48 hp)
 Power Supply: 220 V / 50Hz
 Rotating Speed: 2800 RPM
 Max Pressure: 150 Bar
 Theoretical Flow: 10 L/Min


AY-PWIH-1880

Motive Power: 2.5 kW (3.35 hp)
 Power Supply: 220 V
 Rotating Speed: 2800 RPM
 Motor Type: Copper Type
 Max Pressure: 150 Bar
 Output Capacity: 10 L/Min


AY-PW-818

(High Pressure)
 Volt/Freq.: 220 V/50 Hz
 Input Power: 1800 W
 Speed: 0-23000 RPM


KK-PWCB-105

Rated Power: 1650 W
 Input Power: 230 V(50 Hz)
 Motor Type: Carbon-Brush
 Maximum Pressure: 10.5 MPa
 Cleaning Pressure: 7 MPa
 Output Capacity: 5 L/Min


KK-PWCB-130

Rated Power: 1850 W
 Input Power: 230 V(50 Hz)
 Motor Type: Carbon-Brush
 Maximum Pressure: 13.5 MPa
 Cleaning Pressure: 9 MPa
 Output Capacity: 5.7 L/Min


KK-PWIM-110

Rated Power: 1800 W
 Input Power: 230 V(50 Hz)
 Motor Type: Induction
 Maximum Pressure: 16.5 MPa
 Cleaning Pressure: 11 MPa
 Output Capacity: 5.5 L/min


KK-PWIN-135

Rated Power: 1500 W
 Input Power: 230 V(50 Hz)
 Motor Type: Induction
 Maximum Pressure: 13.5 MPa
 Cleaning Pressure : 9 MPa
 Output Capacity: 6 L/min


KK-PWIN-165

Rated Power: 1800 W
 Input Power: 230 V(50 Hz)
 Motor Type: Induction
 Maximum Pressure: 16.5 MPa
 Cleaning Pressure: 11 MPa
 Output Capacity: 6 L/min


AY-PWIM-007


Rated Power: 2500 W
 Input Power: 230V(50Hz)
 Motor Type: Induction
 Maximum Pressure: 19.5 MPa
 Cleaning Pressure : 13 MPa
 Output Capacity: 6.5 L/min


AY-PWIH-2200

Motive Power: 2.2 kW (2.95 hp)
 Power Supply: 220 V
 Rotating Speed: 2800 RPM
 Motor Type: Copper Motor
 Max Pressure: 180 Bar
 Output Capacity: 13.7 L/min


AY-PWIM-3900

Motive Power: 7.5 kW (10 hp)
 Power Supply: 380 V / 50 Hz
 Rotating Speed: 1440 RPM
 Motor Type: Copper Motor
 Max Pressure: 300 Bar
 Output Capacity: 16.7 L/Min
 Phase: Three Phase

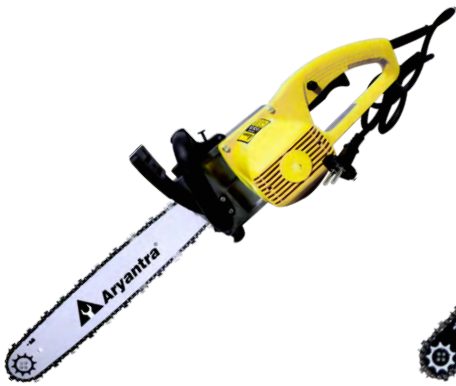CHAINSAWS

AY-CSE-1316 (Electric)

Rated Power: 1300 W
 Speed: 400 m/min
 Length of Bar: 16 Inches
 Power: Electric


AY-CSP-6118

Rated Power: 2.2 kW (2.95 hp)
 Displacement: 58 cc
 Max Speed: 10000 RPM
 Engine/Fuel: 2-Stroke/Petrol
 Chain: Semi Chisel
 Bar Size: 18 Inches
 Fuel Tank Capacity: 550 ml
 Fuel Consumption: 1500 ml/hr


AY-CSP-6120

Rated Power: 2.2 kW (2.95 hp)
 Displacement: 58 cc
 Max Speed: 10000 RPM
 Engine/Fuel: 2-Stroke/Petrol
 Chain: Semi Chisel
 Bar Size: 20 Inches
 Fuel Tank Capacity: 550 ml
 Fuel Consumption: 1500 ml/hr


AY-CSP-6122

Rated Power: 2.2 kW (2.95 hp)
 Displacement: 58 cc
 Max Speed: 10000 RPM
 Engine/Fuel: 2-Stroke/Petrol
 Chain: Semi Chisel
 Bar Size: 22 Inches
 Fuel Tank Capacity: 550 ml
 Fuel Consumption: 1500 ml/hr


AY-CSP-6218

Rated Power: 2.5 kW (3.35 hp)
 Displacement: 58 cc
 Max Speed: 12000 RPM
 Bar Size: 18 Inches


AY-CSP-6222

Rated Power: 2.5 kW (3.35 hp)
 Displacement: 58 cc
 Max Speed: 12000 RPM
 Bar Size: 22 Inches


AY-CSP-676

Rated Power: 2.3 Kw (3.084 hp)
 Displacement: 55 cc
 Max Speed: 11100 RPM
 Bar Size: 18 Inches


AY-CSP-787

Rated Power: 2.8 kW (3.75 hp)
 Displacement: 54.5 cc
 Max Speed: 13200 RPM
 Bar Size: 18 Inches


KK-CSP-5720

Walbro Carburetor
 Rated Power: 2.2 kW (2.95 hp)
 Displacement: 50.8 cc
 Speed: 9000 RPM
 Engine/Fuel: Petrol
 Chain: Full Chisel (Oregon Chain)
 Length of Bar: 51 cm (20")
 Fuel Tank Capacity: 540 ml
 Fuel Consumption: 1200 ml/hr


KK-CSP-5920 **FMTTI**

Rated Power: 2.8 kW
 Displacement: 56.5 cc
 Speed: 8500 RPM
 Engine/Fuel: 2-Stroke/Petrol
 Chain: Full Chisel (Oregon Chain)
 Length of Bar: 510 mm
 Fuel Tank Capacity: 0.450L
 Fuel Consumption: 1.05 L/hr


KK-CSP-8650

Walbro Carburetor
 Rated Power: 2.2 kW (3 hp)
 Displacement: 50 cc; Speed: 9000 RPM
 Engine/Fuel: 2-Stroke/Petrol
 Chain: Full Chisel (Oregon Chain)
 Length of Bar: 46 cm (18")
 Fuel Tank Capacity: 600 ml
 Fuel Consumption: 1500 ml/hr
 Oil Tank Capacity: 260 ml

DISCLAIMER:

Pictures used are for illustration purpose only. Product specifications are subject to change without prior notice. Performance of machine may vary with User/field/Working conditions.

TCT BLADES

Available Sizes:

110 x 20 mm: 30 Teeth
 127 x 20 mm: 30 Teeth
 110 x 20 mm: 40 Teeth
 127 x 20 mm: 40 Teeth

CUTTING BLADES

Available Grits:

36 Grits
 46 Grits
 60 Grits
 80 Grits

WA WHEELS

Available Grits:

36 Grits
 46 Grits
 60 Grits
 80 Grits

DC GRINDING WHEEL

Available Sizes:

100 x 6 x 16 mm
 125 x 6 x 16 mm
 125 x 6 x 22.2 mm

CUP WHEELS

Available Sizes:

80 mm (SEGMENTED)
 80 mm (RIM)

FLAP DISCS

Available Grits:

60 Grits
 80 Grits
 20 Grits

FIBRE DISCS


Available Grits:

36 Grits
 60 Grits
 80 Grits
 100 Grits
 120 Grits

NON-WOVEN PADS

Available Sizes:

100 mm, U3
 100 mm, U5

SAND PAPER WITH VELCRO

Available Grits:

40 Grits
 60 Grits
 80 Grits
 100 Grits
 120 Grits

CUT-OFF WHEEL

Available Sizes:

355 x 1.8 x 25.4 mm
 355 x 2.5 x 25.4 mm
 107 x 1.0 x 16 mm
 107 x 1.5 x 16 mm
 107 x 1.3 x 16 mm
 125 x 1.3 x 22 mm
 125 x 1.5 x 22 mm

DRILL BITS

Available Sizes:

10 x 160 mm	6.5 x 110 mm
12 x 160 mm	8 x 160 mm
5 x 110 mm	8 x 110 mm
6 x 110 mm	6.5 x 160 mm
6 x 160 mm	