

VMT - Modular Hydraulic Trailer - 6 Axle Line



TECHNICAL SPECIFICATIONS

TRAILER MODEL	SVT-6 (18 Ton)	SHVM-06 (18 Ton)	HVT-6 (26 Tons)	HD-06 (36 Tons)
No. of Axle Rows (Nos.)	06	06	06	06
Overall Trailer Length (MM)	12020	11980	11820	11955
Overall Height (MM)	1454	1420	1420	1420
Overall Width (MM)	3000	3000	3000	3000
Unladen Weight of Trailer (Kgs.)	23200	24400	24238	24570
GVW of the Trailer (Kgs.)	108000	108000	156000	216000
Payload Carrying Capacity (Kgs.)	84800	83600	131762	191430
Platform Length (MM)	9000	9000	9000	9000
Platform Width (MM)	3000	3000	3000	3000
Axles	VMT Make	York Make	York Make	York Make
Steering Angle	53°	53°	53°	53°
No. of Tyres (Nos)	48	48	48	48
Tyre Size	7.50 x 16 - 16 PR Nylon	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial
Wheel Rims	6 x 16 - 8 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes
Power Pack	10 HP Air Cooled Diesel	10 HP Air Cooled Diesel	Air Cooled Diesel/Petrol	Water Cooled Diesel
OTHER FEATURES				
Frame - Main Beam	I-Section Main Beam	I-Section Main Beam	I-Section Main Beam	Box Type Main Beam
Frame Material	S-350 Grade Steel	S-350 Grade Steel	SQ-690 QL & S-450 BR	SQ-690 QL & S-450 BR
Suspension Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type
Brake Type	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Parking Brake Type	Spring Loaded	Spring Loaded	Spring Loaded	Spring Loaded
Approved by ICAT, Manesar	Yes	Yes	Yes	Yes



POWER PACKS



EXTENDABLE TRAILERS - WITH STEERABLE AXLES



VMT INDUSTRIES

Works : Khasra No. 92-1/2, 2/1, 2/2, 3, Bohra Kalan, Pataudi, Bilaspur, Manesar, Gurugram - 122413 (Haryana)
H.O. : A-6, Mayapuri Indl. Area, Phase - II, New Delhi - 1100064 (India)

+91 11 41845097-98, +91 98105 02799 sales@vmt.co.in www.vmt.co.in



SIMPLIFYING O.D.C. TRANSPORTATION

www.vmt.co.in



India's No1 Modular Hydraulic Trailer Manufacturer

VMT - Modular Hydraulic Trailer - 2 Axle Line




TECHNICAL SPECIFICATIONS


TRAILER MODEL	SVT-2 (18 Ton)	SHVM-02 (18 Ton)	HVT-2 (26 Tons)	HD-02 (36 Tons)
No. of Axle Rows (Nos.)	02	02	02	02
Overall Trailer Length (MM)	6020	5870	5870	5955
Overall Height (MM)	1454	1420	1420	1450
Overall Width (MM)	3000	3000	3000	3000
Unladen Weight of Trailer (Kgs.)	8000	8117	8117	8450
GVW of the Trailer (Kgs.)	36000	36000	52000	72000
Payload Carrying Capacity (Kgs.)	28000	27883	43883	63550
Platform Length (MM)	3000	3000	3000	3000
Platform Width (MM)	3000	3000	3000	3000
Axles	VMT Make	York Make	York Make	York Make
Steering Angle	53°	53°	53°	53°
No. of Tyres (Nos)	16	16	16	16
Tyre Size	7.50 x 16 - 16 PR Nylon	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial
Wheel Rims	6 x 16 - 8 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes
Power Pack	N.A.	N.A.	N.A.	N.A.
OTHER FEATURES				
Frame - Main Beam	I-Section Main Beam	I-Section Main Beam	I-Section Main Beam	Box Type Main Beam
Frame Material	S-350 Grade Steel	S-350 Grade Steel	SQ-690 QL & S-450 BR	SQ-690 QL & S-450 BR
Suspension Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type
Brake Type	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Parking Brake Type	Spring Loaded	Spring Loaded	Spring Loaded	Spring Loaded
Approved by ICAT, Manesar	Yes	Yes	Yes	Yes



HYDRAULIC GOOSE NECK

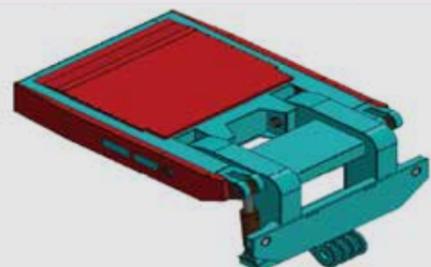

BOLSTER ARRANGEMENT ON MODULAR HYDRAULIC TRAILERS

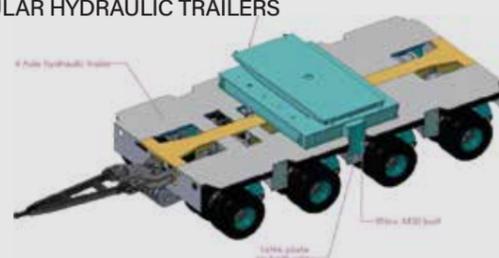


VMT - Modular Hydraulic Trailer - 4 Axle Line




TECHNICAL SPECIFICATIONS

TRAILER MODEL	SVT-4 (18 Ton)	SHVM-04 (18 Ton)	HVT-4 (26 Tons)	HD-04 (36 Tons)
No. of Axle Rows (Nos.)	04	04	04	04
Overall Trailer Length (MM)	9020	8820	8820	8955
Overall Height (MM)	1454	1420	1420	1450
Overall Width (MM)	3000	3000	3000	3000
Unladen Weight of Trailer (Kgs.)	16000	16235	16235	16920
GVW of the Trailer (Kgs.)	72000	72000	104000	144000
Payload Carrying Capacity (Kgs.)	56000	55765	87765	127080
Platform Length (MM)	6000	6000	6000	6000
Platform Width (MM)	3000	3000	3000	3000
Axles	VMT Make	York Make	York Make	York Make
Steering Angle	53°	53°	53°	53°
No. of Tyres (Nos)	32	32	32	32
Tyre Size	7.50 x 16 - 16 PR Nylon	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial	215/75 R 17.5 TL Radial
Wheel Rims	6 x 16 - 8 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes	17.5 x 6 - 10 Holes
Power Pack	10 HP Air Cooled Diesel	10 HP Air Cooled Diesel	Air Cooled Diesel/Petrol	Water Cooled Diesel
OTHER FEATURES				
Frame - Main Beam	I-Section Main Beam	I-Section Main Beam	I-Section Main Beam	Box Type Main Beam
Frame Material	S-350 Grade Steel	S-350 Grade Steel	SQ-690 QL & S-450 BR	SQ-690 QL & S-450 BR
Suspension Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type	Hydraulic Cylinder Type
Brake Type	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Parking Brake Type	Spring Loaded	Spring Loaded	Spring Loaded	Spring Loaded
Approved by ICAT, Manesar	Yes	Yes	Yes	Yes

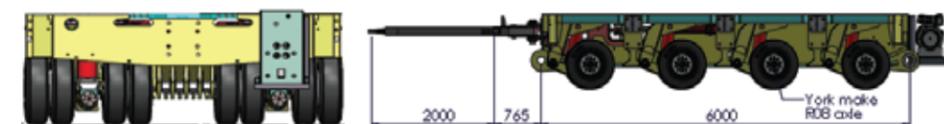

TELESCOPIC SPACERS

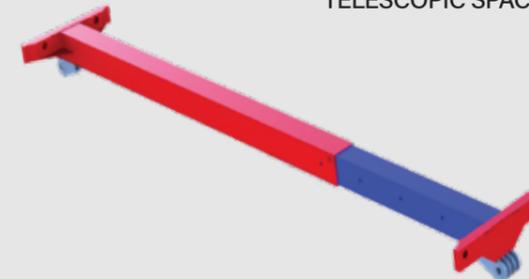

DROP DECK - 15 MTR PLATFORM

