



600X600


WHITE BODY TILES

Decora Series
DIGITAL
Rustic Series
PORCELAIN
Glossy Series
TILES
Wood Series

600x600mm

600x1200mm


Punch Series

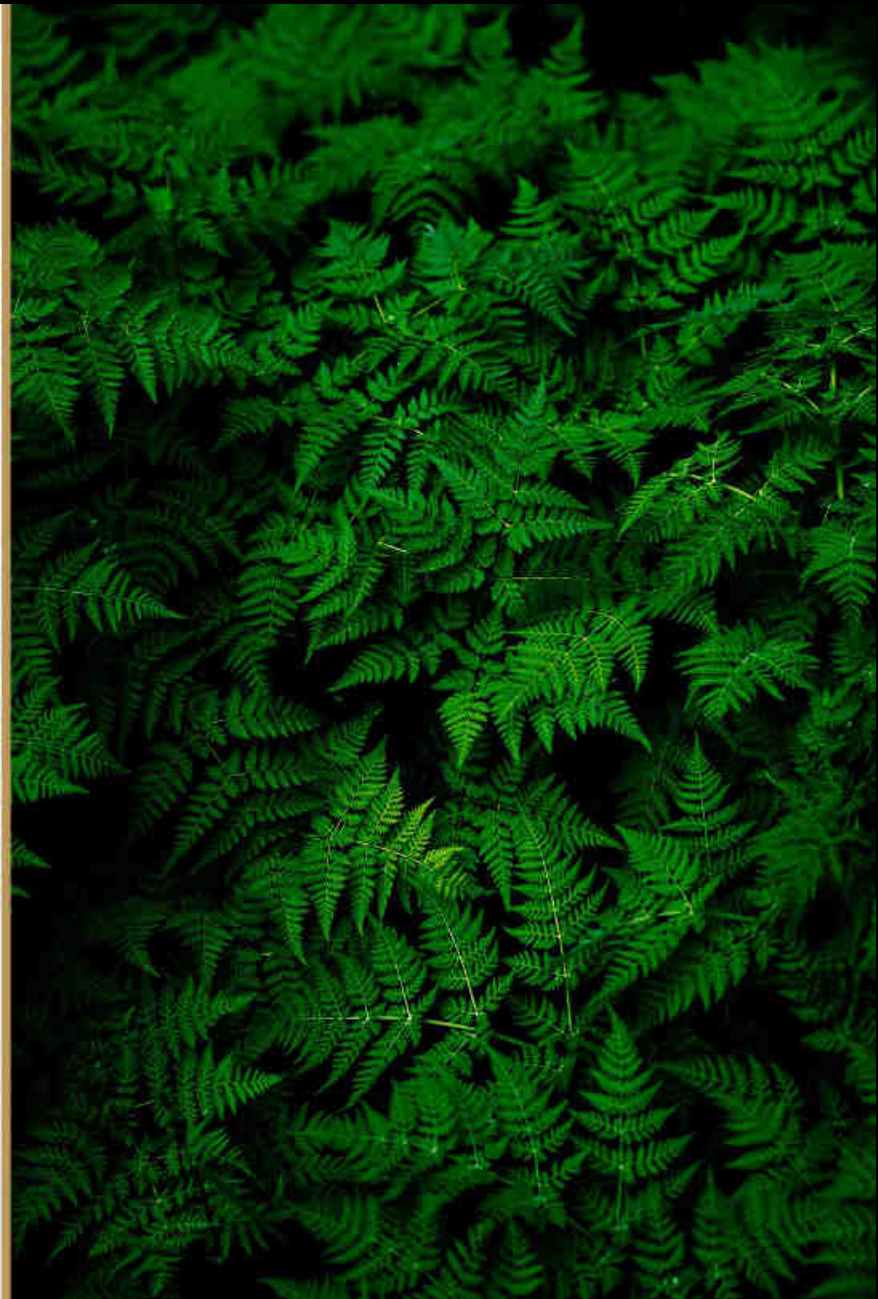

RL_GH_1001

WHITE BODY(GVT TILES)



600x600mm

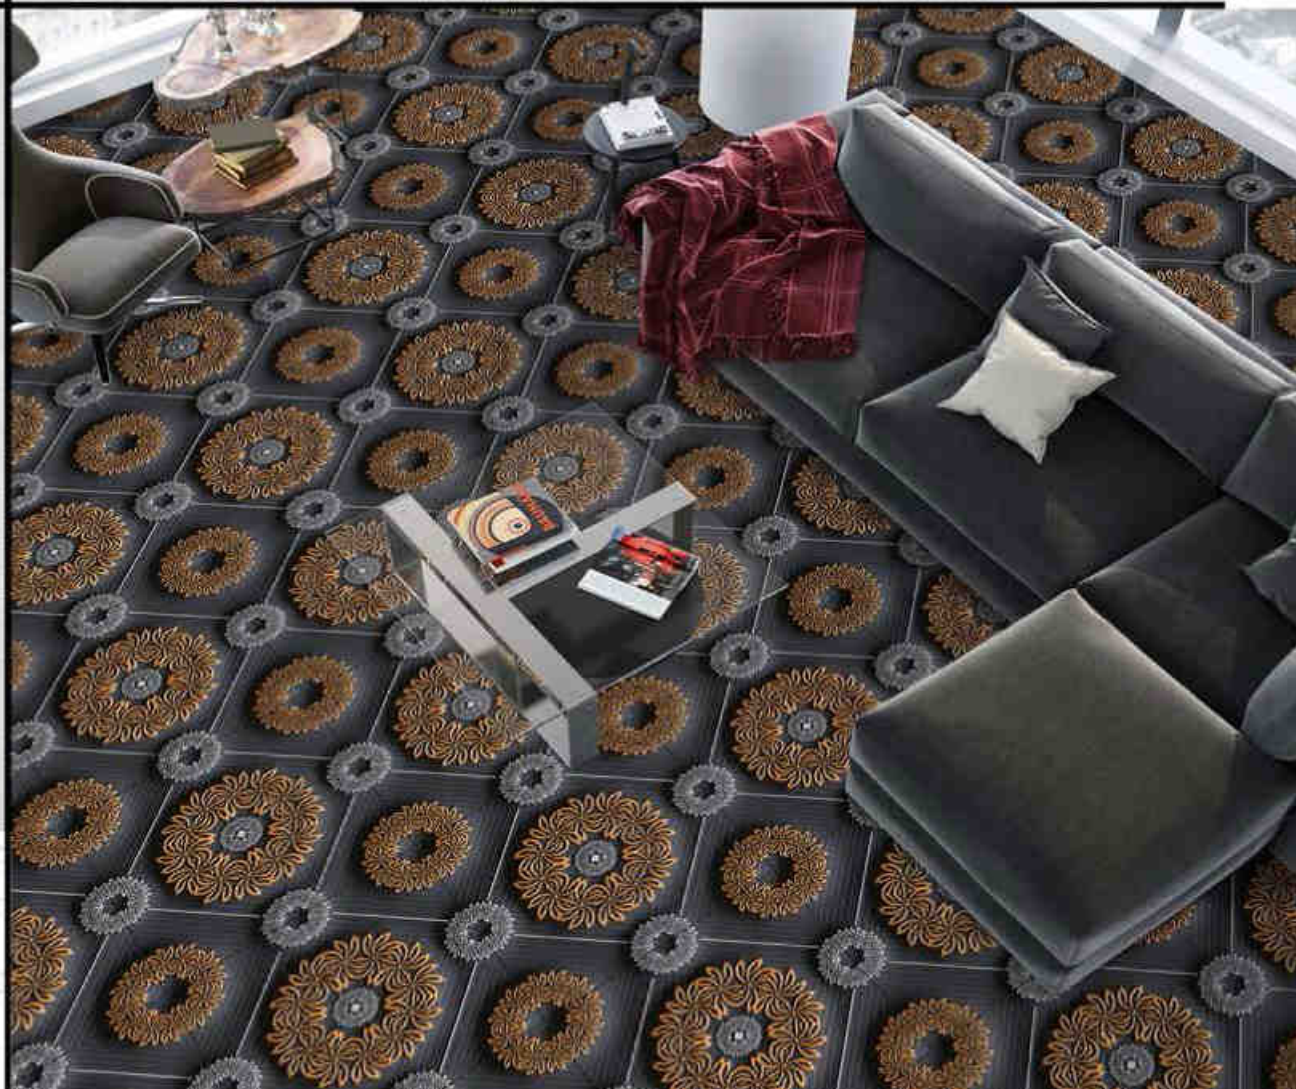

RL_GH_1002

WHITE BODY(GVT TILES)


600x600mm

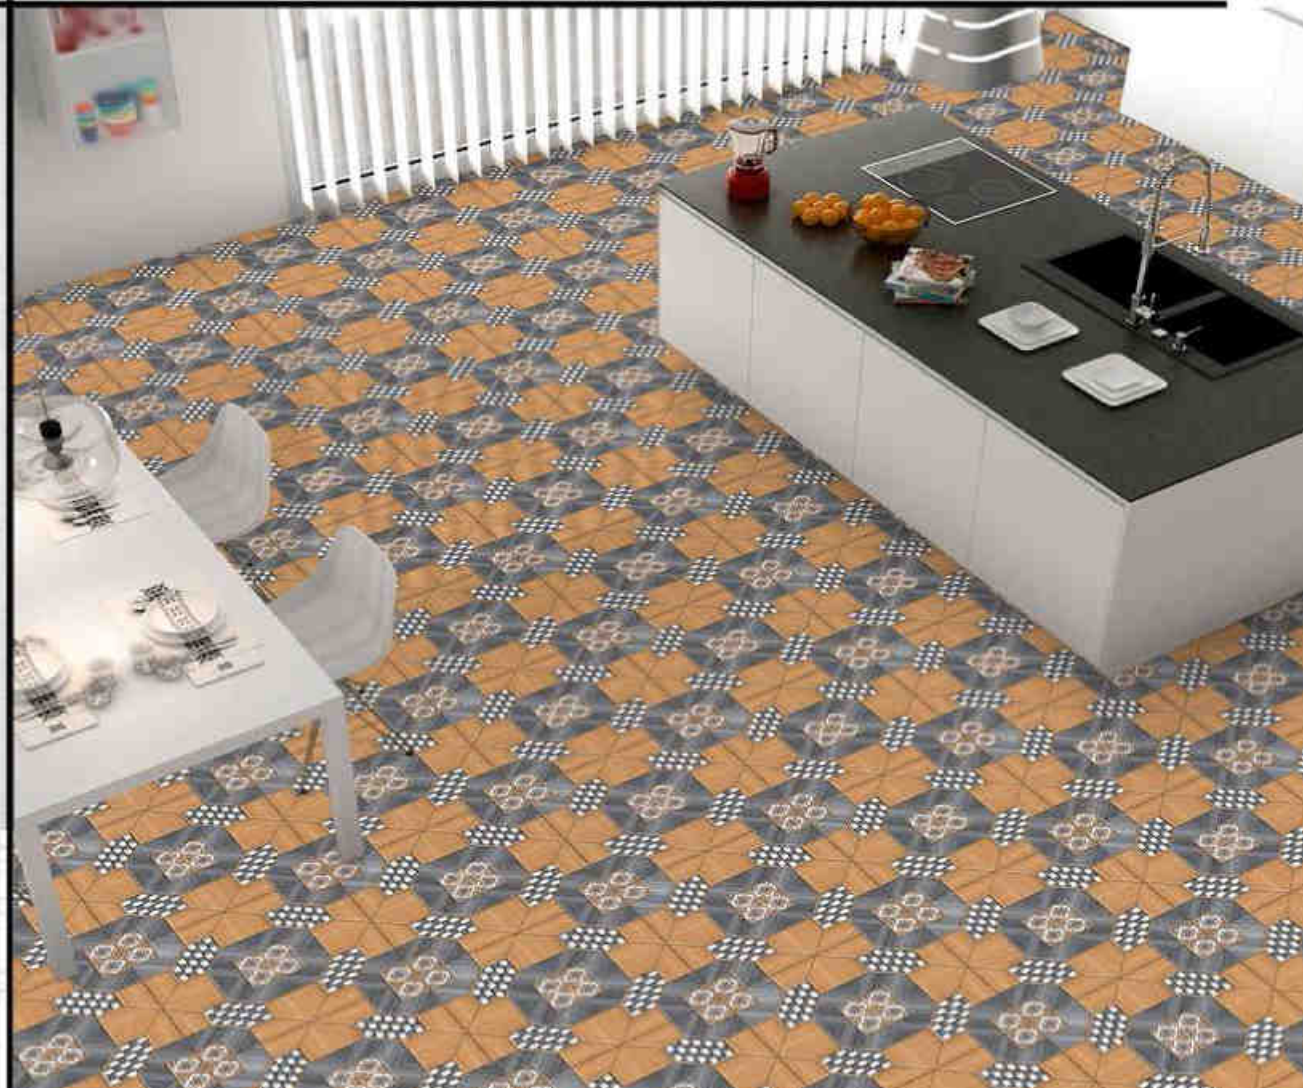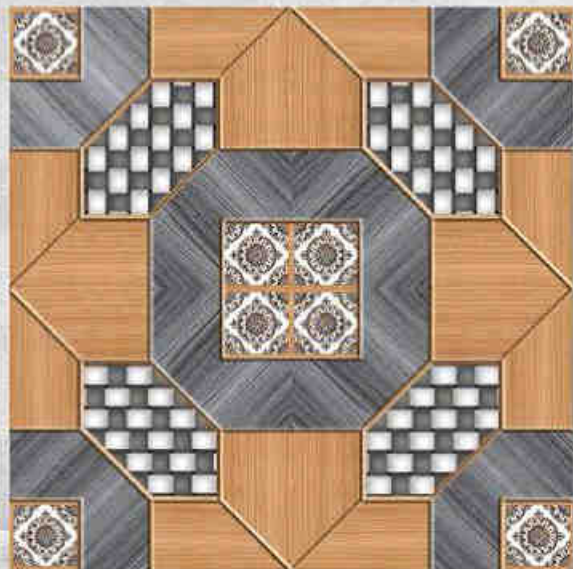

RL_GH_1005

WHITE BODY(GVT TILES)


600x600mm

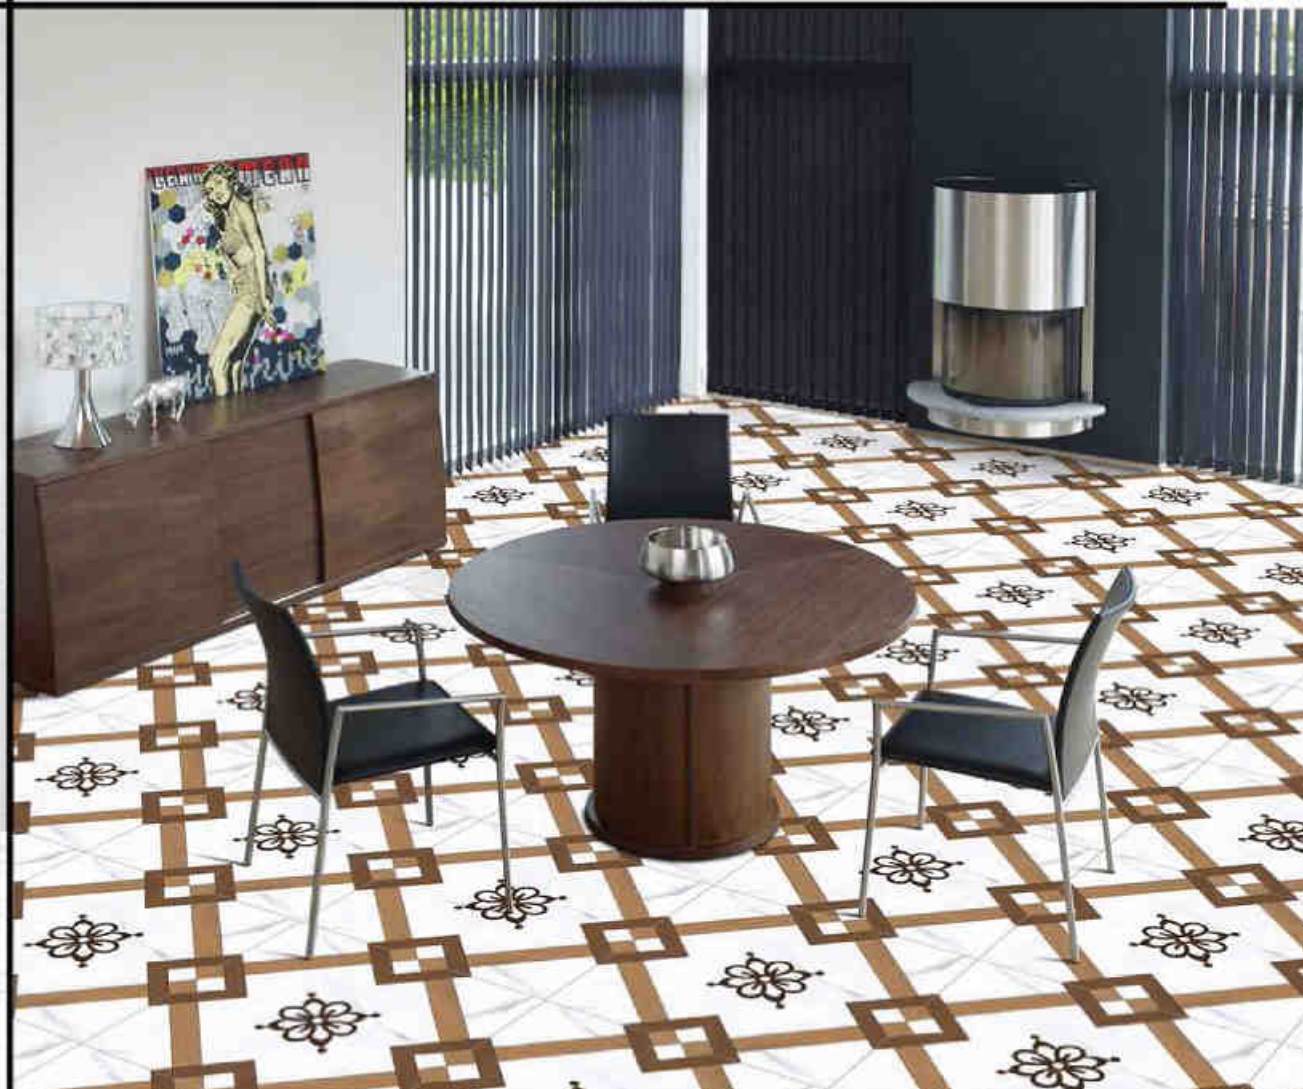

RL_GH_1006

WHITE BODY(GVT TILES)

600x600mm

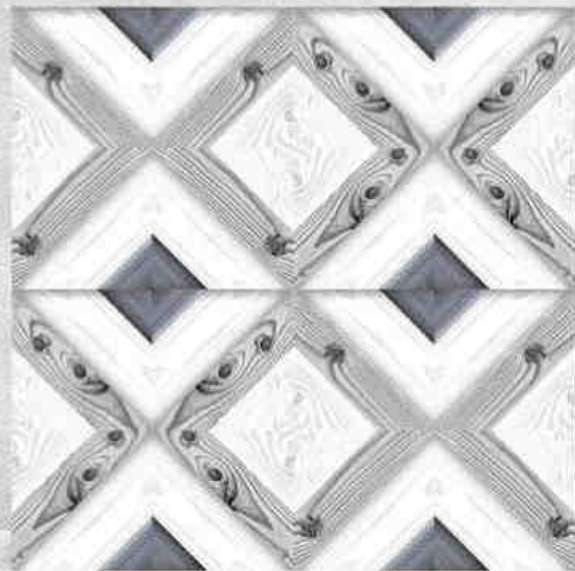

RL_GH_1008

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1009

WHITE BODY(GVT TILES)


600x600mm



RL_GH_1010

WHITE BODY(GVT TILES)

600x600mm

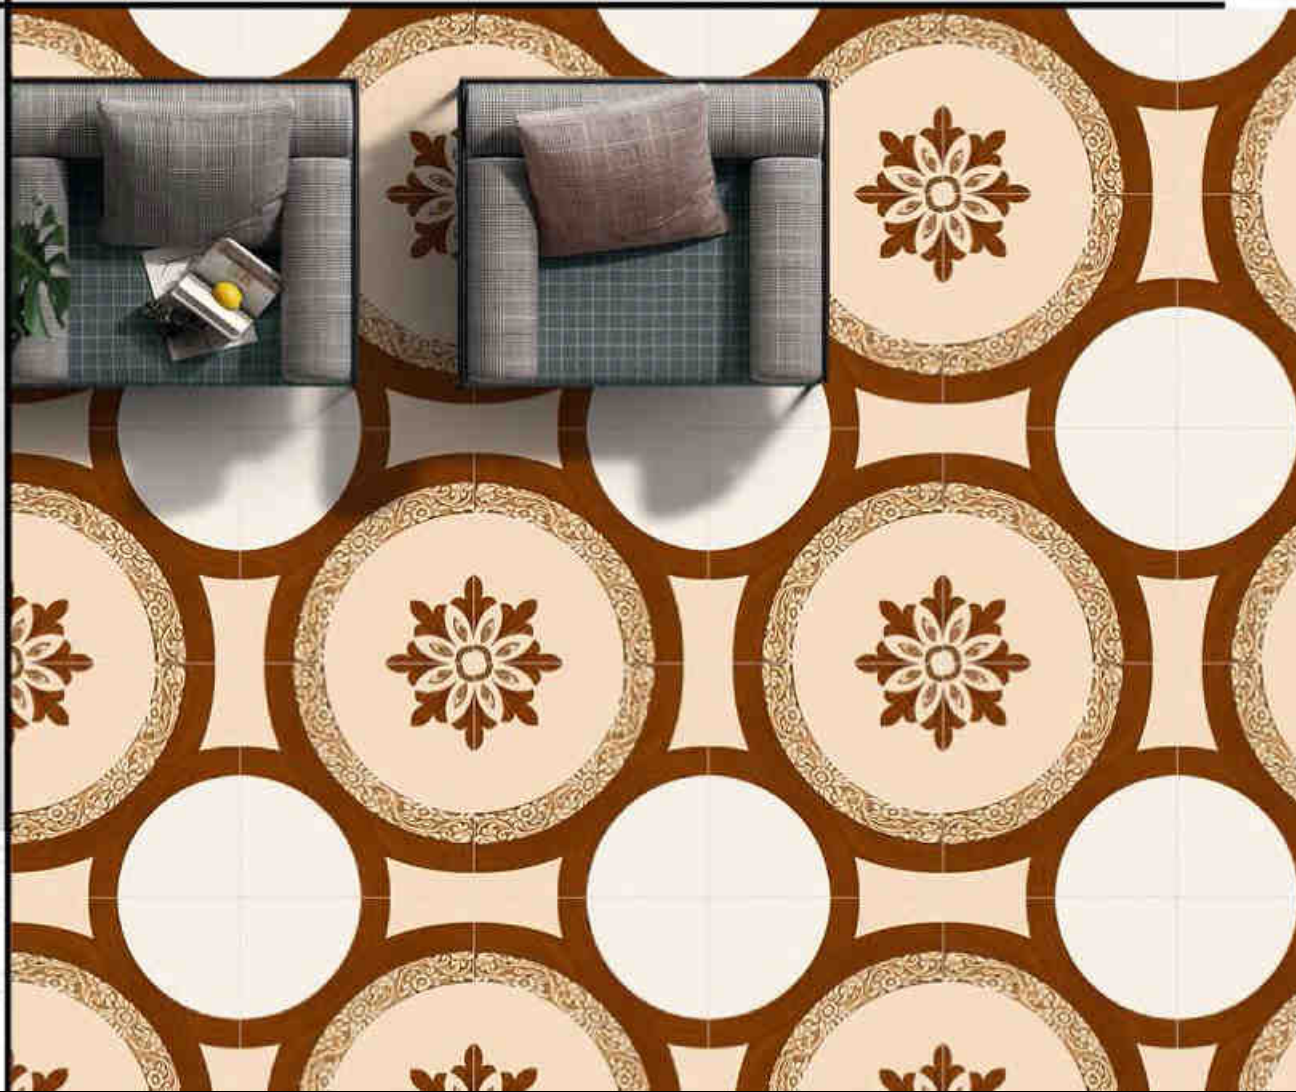

RL_GH_1012

WHITE BODY(GVT TILES)


600x600mm



RL_GH_1013

WHITE BODY(GVT TILES)

600x600mm

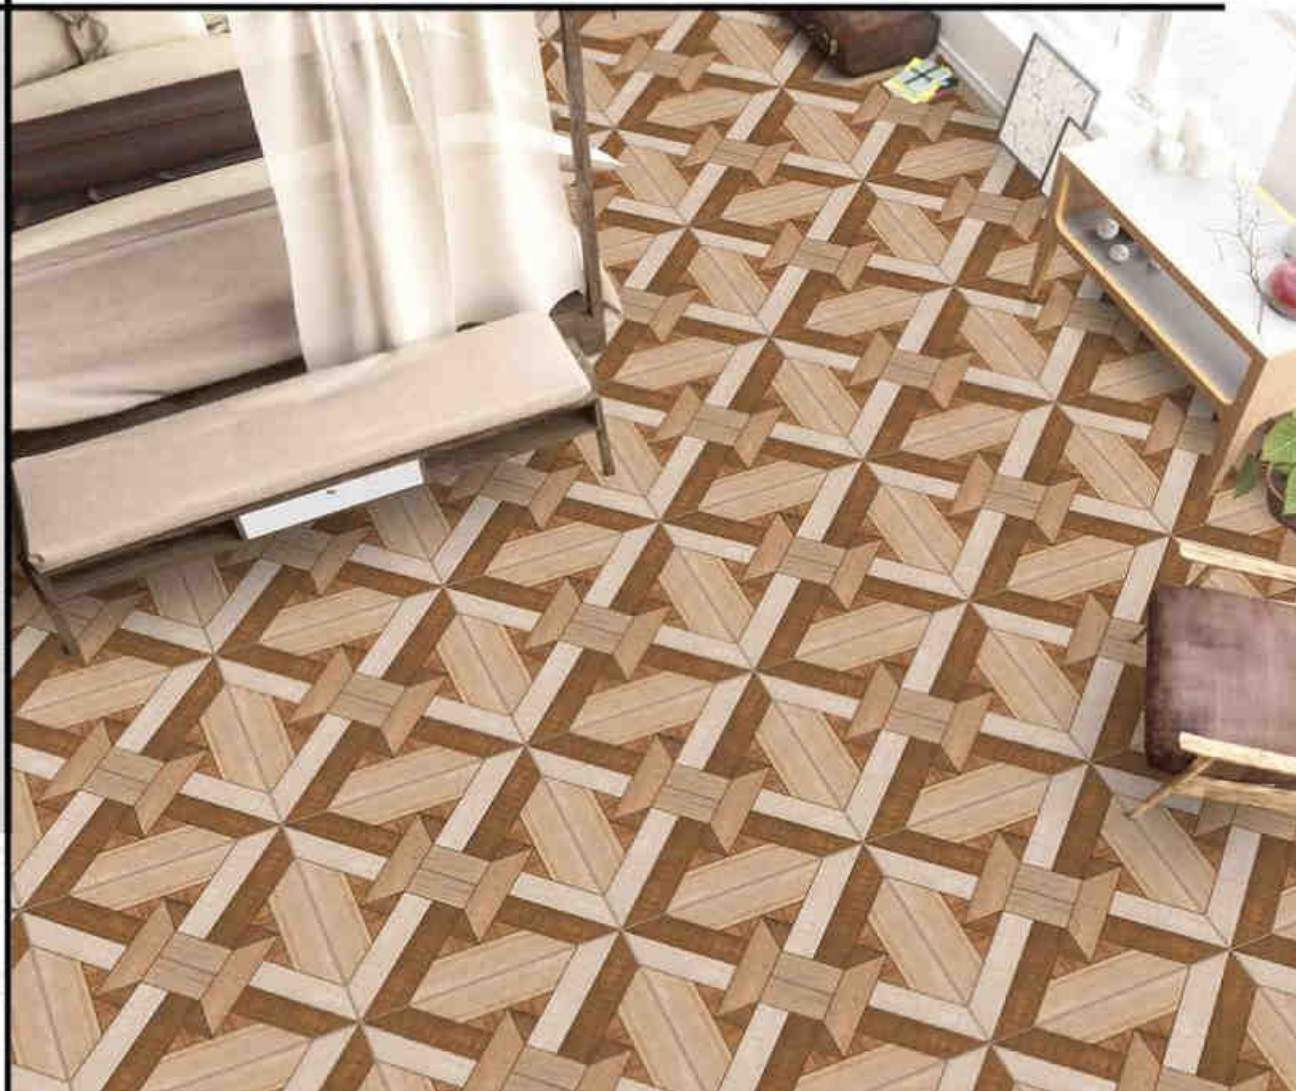

RL_GH_1015

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1016

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1017

WHITE BODY(GVT TILES)


600x600mm



RL_GH_1018

WHITE BODY(GVT TILES)

600x600mm

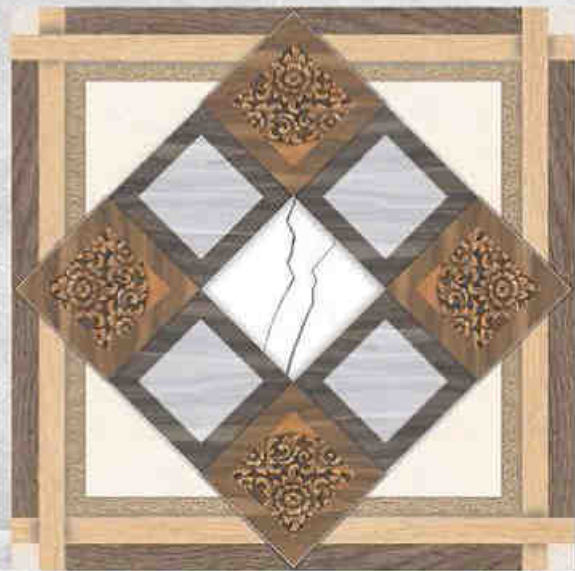

RL_GH_1019

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1021

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1022

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1024

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1027

WHITE BODY(GVT TILES)



600x600mm



RL_GH_1034

WHITE BODY(GVT TILES)

600x600mm

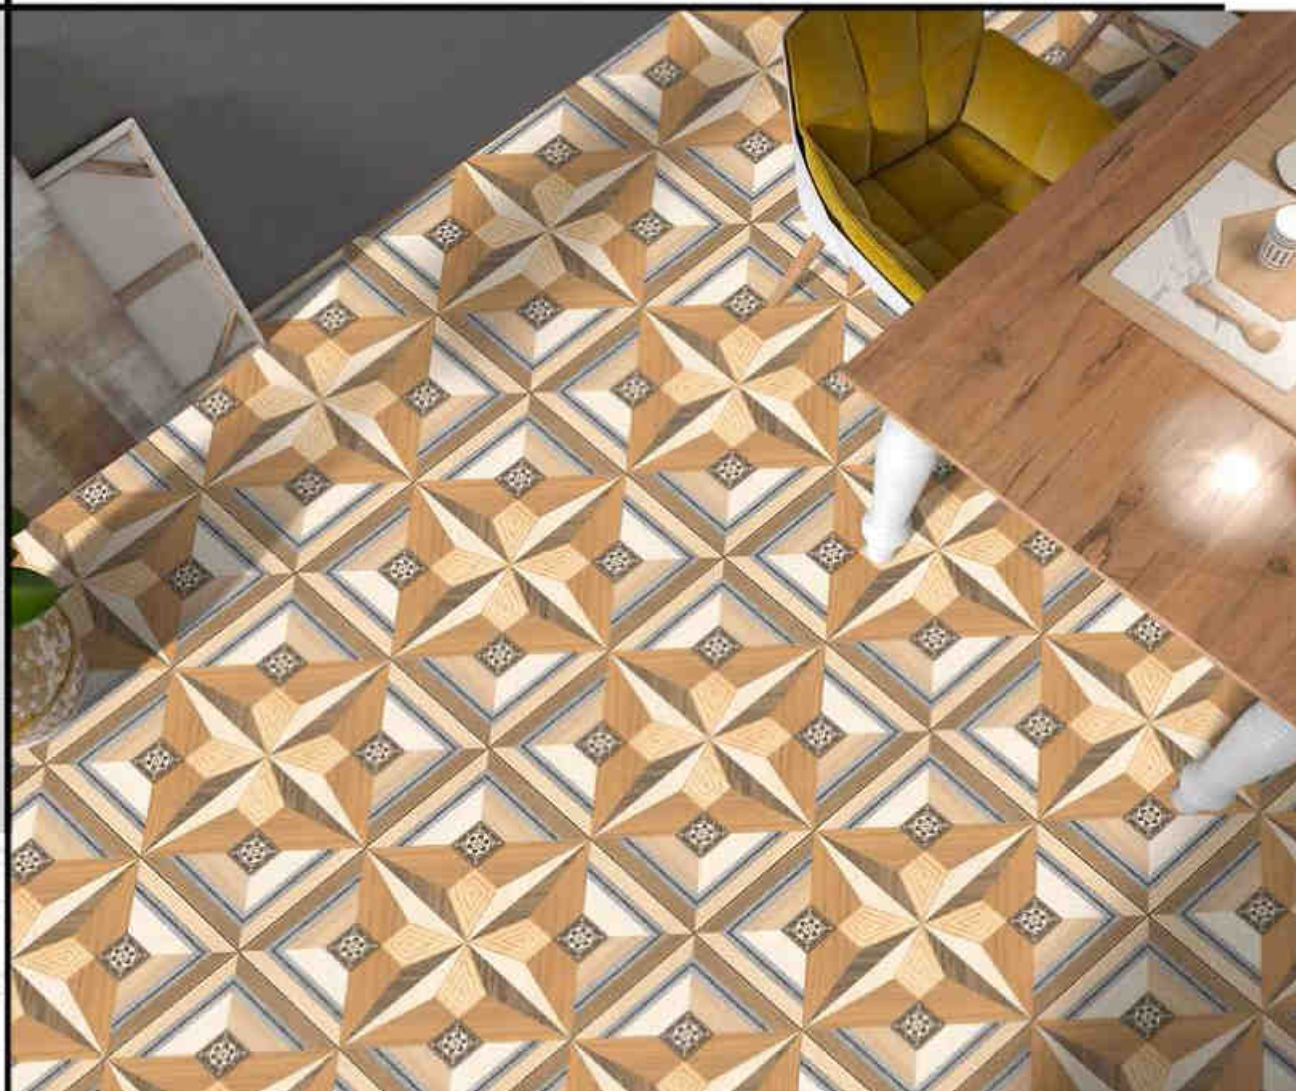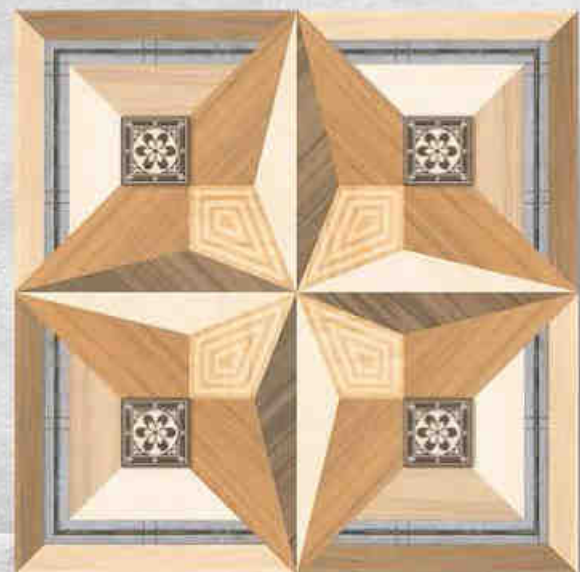

RL_GH_1035

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1036

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1037

WHITE BODY(GVT TILES)

600x600mm



RL_GH_1038

WHITE BODY(GVT TILES)


600x600mm



RL_GH_1039

WHITE BODY(GVT TILES)

600x600mm

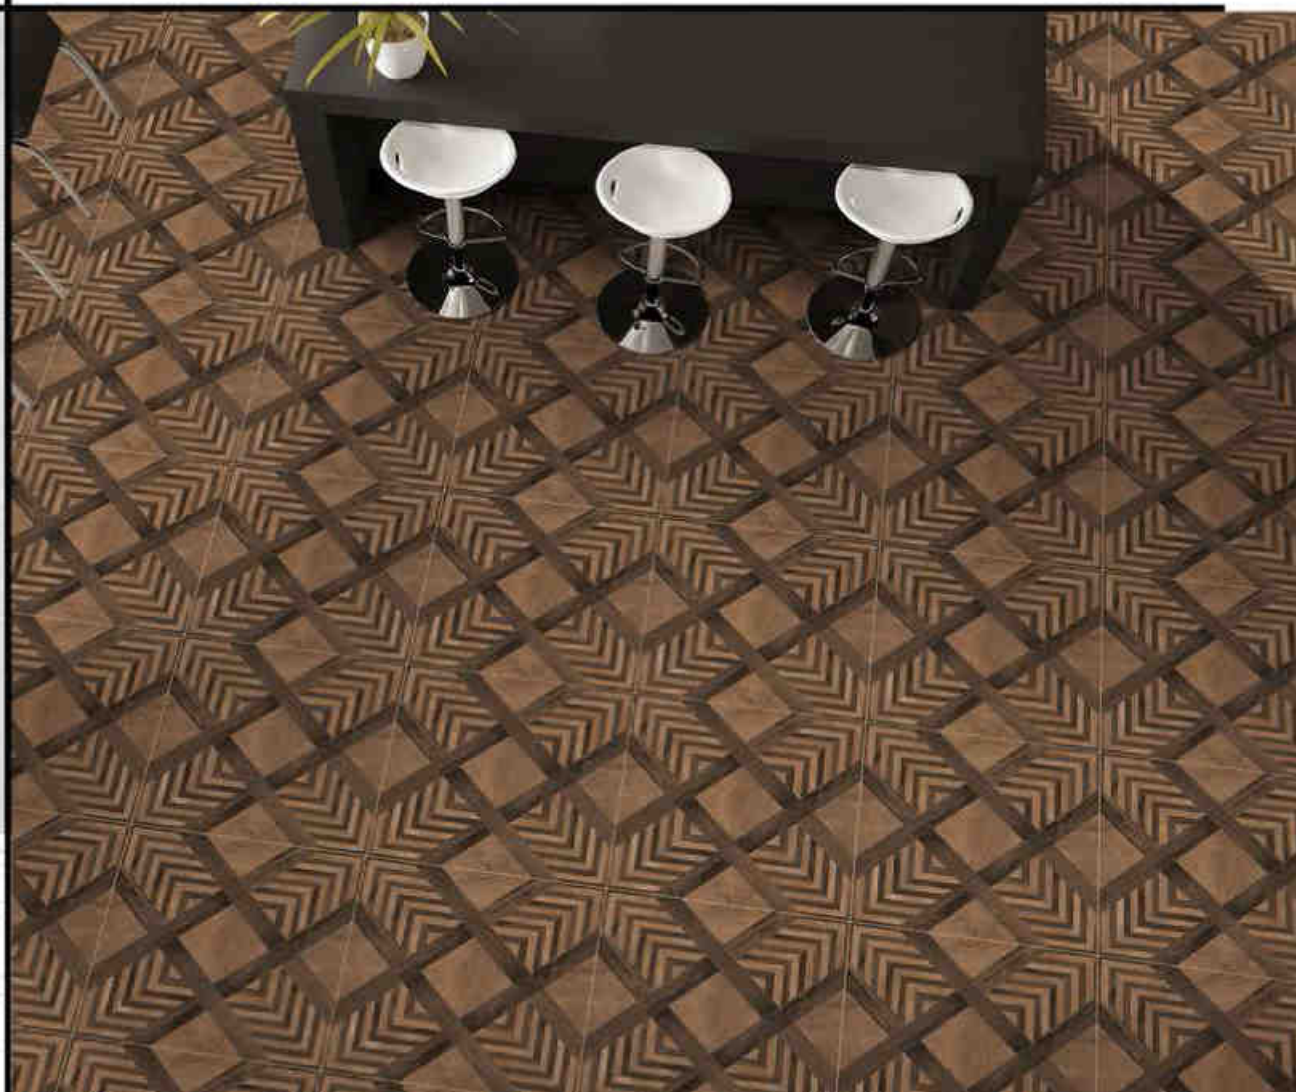

RL_GH_1041

WHITE BODY(GVT TILES)

600x600mm



Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	±3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE I 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545- 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nil	Nil	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note:
Colors shown are approximate as the final color of the pricing process will allow. Prospective Customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being allowed to certain industry may occur. It is suggested to check for the color point and size prior to the company does not accept responsibility for the final result.

PACKING DETAIL

Size	Thickness	No. OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	28kg.



Airport



Shopping Center



Industries



Hospital



Schools



Hotel



Domestic



Offices



Super Markets



Restaurant - Cafe



Gym



Discotheques



Corridors



Religious Places





THANK YOU