

New



Multi-Stripper PLUS No. 500

Screwdriver


Two turnable bits

- 1. PZ 1 (⊕), 3.5 X 0.6 mm (⊖)
- 2. PZ 2 (⊕), 4.0 X 0.8 mm (⊖)



Voltage tester


110 - 250 Volt.

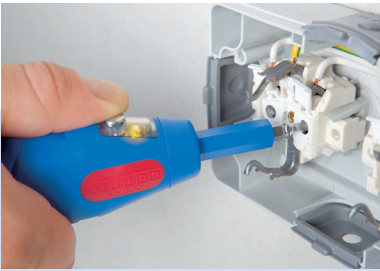

Ergonomic two component handle

Round Cable Stripper

For all round cables of 8 -13 mm Ø
(e.g. NYM 3 x 1.5 mm²
up to 5 x 2.5 mm²).

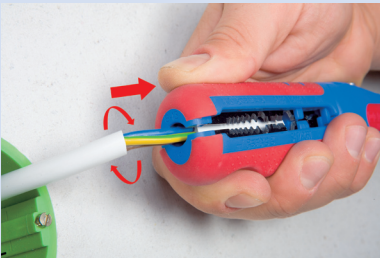

Second Bit

Second bit inside the handle.




Build-in side cutter

For pvc-isolated round cables
of max. 9 mm Ø.




Coax Stripper

Two- or three-level stripping
of all common coaxial cables
of 4.8 to 7.5 mm outer Ø.

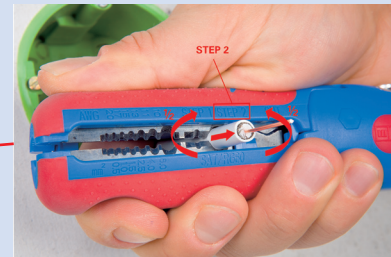

Stripper

For all common stranded and
solid conductors of 0.5 mm²
(20 AWG) to 6.0 mm² (10 AWG).

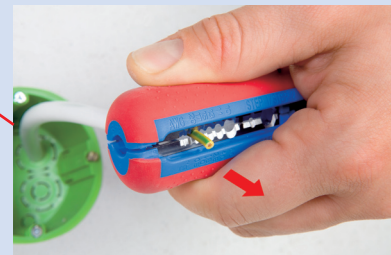

Any product specifications and recommendations given herein must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without warranty. We are not liable for any damage or injury caused by the use of our products. The user bears the only responsibility for non-appropriate or other than specified applications. Caution: Working with WEICON Stripping Tools is only permissible on potential-free cables and wires. cannot be derived from them.