



THE DOOR | Portfolio



Revolutionizing the manufacturing of INTERNATIONAL QUALITY DOORS.

DORMAK INSIGHT:

- Latest German machines used for manufacturing and processing.
- Manufacturing plant is spread over 12000 square meter area.
- Widest portfolio in door category, catering all segments of door.
- Pan India presence.
- User friendly work network.
- Specialized laboratory for quality checking.
- State of the art facility, R&D department providing innovative designs.
- Dormak doors are known as green doors, approved for all green projects.
- Dormak has been awarded by 'Rastriya Udyog Ratna Award'.
- Dormak has been titled as "Door manufacturing Company of the year 2013" by "Brands Academy".
- Dormak has been awarded for its eco-friendly Quality Mark Trust 2015.

Your ONE STOP DOOR SOLUTION Provider



ENQUIRY & CONSULTATION



SPRAY PAINT & FINISHING



DOOR FRAME & ARCHITRAVE



DOOR VARIETIES



DELIVERY SERVICE



INSTALLATION SERVICE

NEO CLASSIC DOORS

A door of substance with elegant panel look. Made with high performance and fool proof structure. It is engineered and detailed at minute level. It is something which impresses you at first look. It has both combination of classical and modern designs. Available in highend Italian finishes.



ROYAL MISTIQUE

PREMIA WHITE PU



NEO CLASSIC DOORS



CELIO



EXOTIKA
OAK



PREMIA OAK



2P PREMIA TEAK



ROYAL CROSS OAK



DIAMOND

7' 8' 9' 10'

30 60

ELEGANT FLUTE



NEO CLASSIC DOORS



SILORA
(WALNUT)



SILORA
(WHITE)



TRUFFLE



OPERA



GLORY



GLAMMY

7' 8' 9' 10'

30 60

ZINNIA



NEO CLASSIC DOORS



ELENZA
HORIZONTAL



EMPRESS



2P DIAMOND



VIOLA



SUPERA TEAK

7' 8' 9' 10'

30 60

VENEER DOORS

A door with Modern and contemporary design. Available in various Natural and exotic veneers, with combination of vertical and horizontal patterns and multiple groove designs. You think of a design and we will deliver keeping in mind the stability, strength and unmatched finish. It will compliment all type of interiors.



VENEER DOORS

- **DOORS CONSTRUCTION:** Flush Door
- **FILLER:** Tubular particle/ Solid Particle / Solid wood filling
- **VENEER OPTION:** Thick recon and natural veneer as per design
- **THICKNESS:** 30, 35, 40, 44, 50 mm
- **GLUE:** E1 grade



DK 152

7' 8' 9' 10'



DK 124



DK 144



DK 140



DK 143



DK 142

30 60 120



DK 511

7' 8' 9' 10'

* VENEERS AVAILABLE:
Recon Wenge, Teak, White Ash,
White Oak, Sapeli, Walnut, Steam Beach,
Smoke Oak, Santos Rosewood.

* Also available in 30/60/120 min
Fire Rated Door.



DK 212



DK 155



DK 129



DK 132



DK 139

30 60 120



DK 145



DK 141



DK 135



DK 201



DK 126



DK 138



DK 515



DK 136



VENEER DOORS SHADES (SPECIES)



Teak



White Oak



Sapeli



Smoke Oak

OTHER VENEERS ALSO AVAILABLE ON REQUEST

STAINING ON TEAK VENEER



Blakish
Brown



Light
Walnut



Rose Wood



Wenge

STAINING OF OAK / BEECH VENEER



Walnut



White Ash



Recon
Wenge



Steam Beach



Dark
Walnut



Light
Walnut




Wenge




Teak Oak


VENEER DOORS




DK 124




DK 136




DK 126




DK 132




DK 133



DK 137




DK 138




DK 129


With Two Aluminum Strip



DK 139



DK 140



DK 141



DK 142




DK 143

With Groves



DK 144

With Groves



DK 211

With One Aluminum Strip



DK 122

With Three Strips




DK 201


With Three Strips



DK 216



DK 130




DK 212



DK 135

DESIGNER LAMINATED DOORS

Dormak Designer Laminated Doors are specified where absolute face aesthetic uniformity is desired. These doors are laminated with high-pressure laminate sheet. The base door is manufactured by seasoned battens and frames with waterproof PF resin. Tubular Core/ Solid Particle Board Core is also used to fill the doors. Laminate doors are available in broad range of design options, using high quality laminate sheet for zero maintenance and long life.

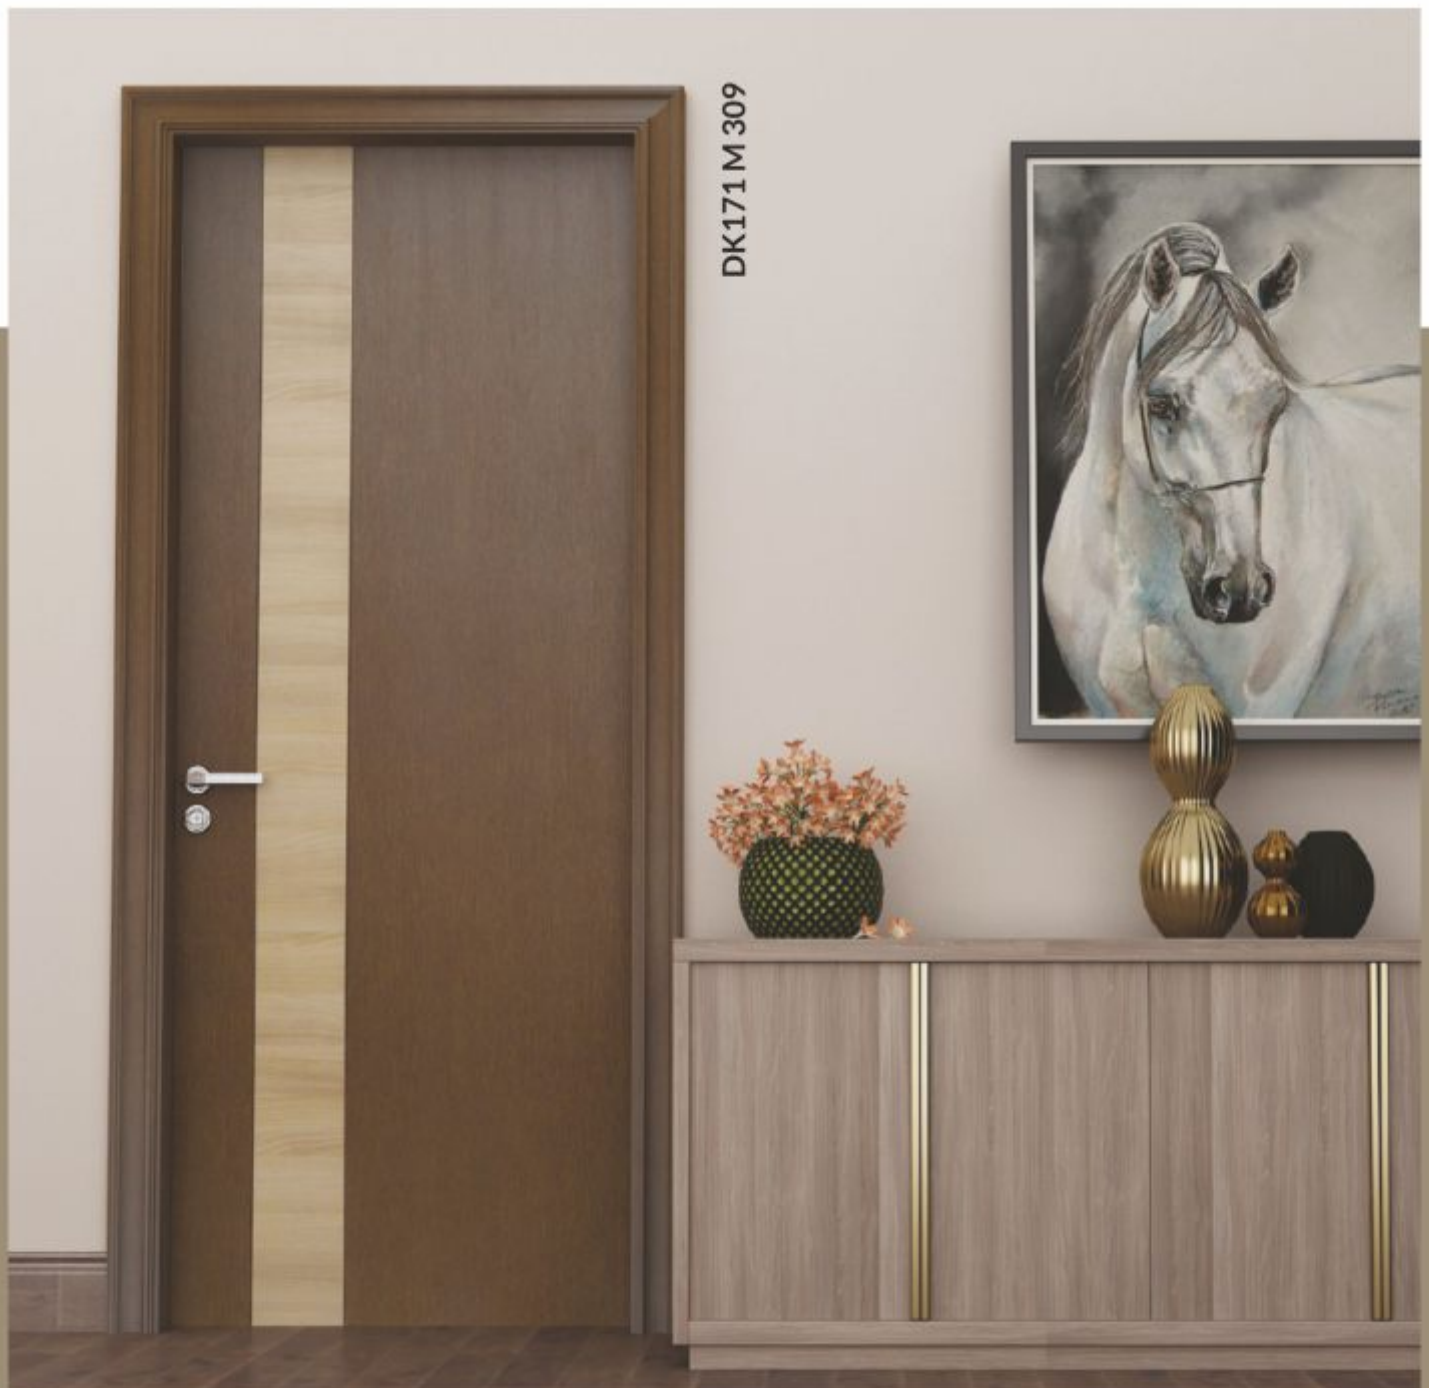

DESIGNER LAMINATED DOORS



Dk175 M006



Dk143 M027



DK- 143 M371

- **DOORS CONSTRUCTION:** Flush Door
- **FLUSH DOOR GLUE:** PF
- **THICKNESS:** 30, 35, 37, 40, 44, 50 mm
- **LAMINATE:** 1mm / 0.8mm HPL
- **LAMINATE GLUE:** D3
- **Door Filler Options:** Tubular Particle/ Solid Particle/ Solid Wood Filling



DK135 D55 265 HRT



Dk135 D53 516 HRT

7' 8'

30 60 120

DESIGNER LAMINATED DOORS



Dk124 D 65 (263 SS)



DK 212 M 422



DK- 212 M378



DK- 212 M371



DK 212 M539



DK 212 M103

7' 8'

30 60 120

DESIGNER LAMINATED DOORS



DK-143 M 422



DK135 D 53 (530 HRT)



Dk143 M378



Dk124 D73 (151 SS)



DK 144 M 856






DK 124 M 378

- * Customized Design and Sizes available.
- * 0.8 & 1mm HPL pasted both sides.
- * Also available in 30/ 60/ 120 minutes Fire Rated Door.

7' 8'

30 60 120

DESIGNER LAMINATED DOORS



LIPPING OPTIONS FOR DESIGNER LAMINATED DOOR

EXTERNAL LIPPING ()



INTERNAL LIPPING ()



EXTERNAL LIPPING () WITH GROOVES



PVC EDGE BAND



REBATES



Double Door Without Rebate



Double Door With Rebate RHI (Right Hand Inside)



Double Door With Rebate LHI (Left Hand Inside)

HDF FLAT DOORS

HDF Flat Door Designs give a wide choice of finishes, textures and designs. They can be stained to give a rich natural look or contemporary shades to suit your home style. There is also a choice of wood grain textures or smooth door surfaces, which can make any room, look unique.

In association with:


MASONITE.



In association with:



MASONITE.



AF 61



FE 71 TT02



ASIAN FASHION
WITH GROVES



TO 85



FE 51 TT 01



FE 51 TT 02



FE 65 TT 01



FES 41



FE 71 TT 01




FES 55 TT 01




FES 45

HDF FLAT DOORS


TYPES OF GROOVES



GROOVE



V GROOVE



ALUMINUM STRIP

TEXTURE



TRUE OAK



ASIAN FASHION



HARMONY



FINE ELEGANCE

TWO TONES LACQUER



TT 01



TT 02



TT 4431



TT 442211

STAINED LACQUER



ROSEWOOD



WENGE



WALNUT

NC PAINTS

*Shades are for indication purpose only.



BLUE CURACAO



MUSHROOM




PEBBLE WHITE



SPECIAL TEAK



EXOTIC SPA



WHITE



NUT BROWN

HDF MOULDED DOORS

In association with:



MASONITE.

Moulded Panel Doors are pre-primed and does not require base coat. Ready for paint or polish. High density fiber Moulded Door skin from World leader Masonite. Beautiful designs to suit your interior and taste. International quality standards. Perfection of design & quality. Solid or tubular core filler options. Eco friendly wood used. E1 grade glue makes it environment friendly.



4 PANEL ARCH TOP
(DK4PAT)

8' HEIGHT
HDF MOULDED DOOR



6 PANEL TEXTURE
DK6PT IN WHITE



CHEYENE

- Door skin from Masonite Int.
- Tubular filler from Sauerland.
- E1 grade glue used.
- Thickness 32, 35, 37mm
- Klin Dried and treated pine wood from sustainable plantation certified forests.



2 PANEL HORIZON (DK2PHT)



2 PANEL ARCH TOP
(DK2PAT)



3 PANEL OVAL
TEXTURE (DK21OT)



3 PANEL
TEXTURE (DK3PT)

FIRE RETARDANT DOORS

Dormak offers wide range of fire rated doors. We are using various types of cores to achieve the designed fire rating. Our doors are highly technical and made with high precision, keeping in mind the safety of our customers. We integrate those doors with various type of surface finish and design.




BENEFITS OF FIRE RATED DOORS

The specialty of our fire containment door using the Low Emission and Sustainable Forest plantation product (PEFC or FSC Certified) like the Sauerland core is that it eliminates the use of any inorganic material in the construction like Gypsum board, Cement board, Calcium Silicate or Fiberglass etc making the door light weight and 100% recyclable.

We promote safe and environment friendly products not only to manufacture but also to dispose it without harming the environment.

Additionally, with mere additions of certain accessories like Drop down seals and perimeter seals we can convert the Fire door into Triple Acting Door offering fire rating of 30 or 60 minutes (as per BS 476 Part 22:1989 or IS 3614) with smoke arrestor technology as well as sound reduction up to 34dBs or 28 dB for 30 minutes.

30 MINUTES DOOR-SET CONSTRUCTION



Certified by:
**INTERNATIONAL FIRE
CONSULTANT LIMITED, UK**

44 MM THICKNESS – RAW DOOR LEAF


3 mm HDF skin on each face + 38 mm Extruded Sauerland Tubular Infill (38 RE7) + Soft wood Stiles and Rails at Moisture Content of 12-15%.

Door Frames can be offered in Softwood or Hardwood as per Customer's specification.

In addition, 1 strip of 15 mm x 2 mm Graphite Intumescent Strip will be installed on 3 sides on the Door Frame and 1 strip of 15mm x 2mm Graphite Intumescent Strip in bottom side of the Door leaf.

Decorative Overlay will be as per Customer's requirement.

Finished Door thickness will vary based on Overlay thickness

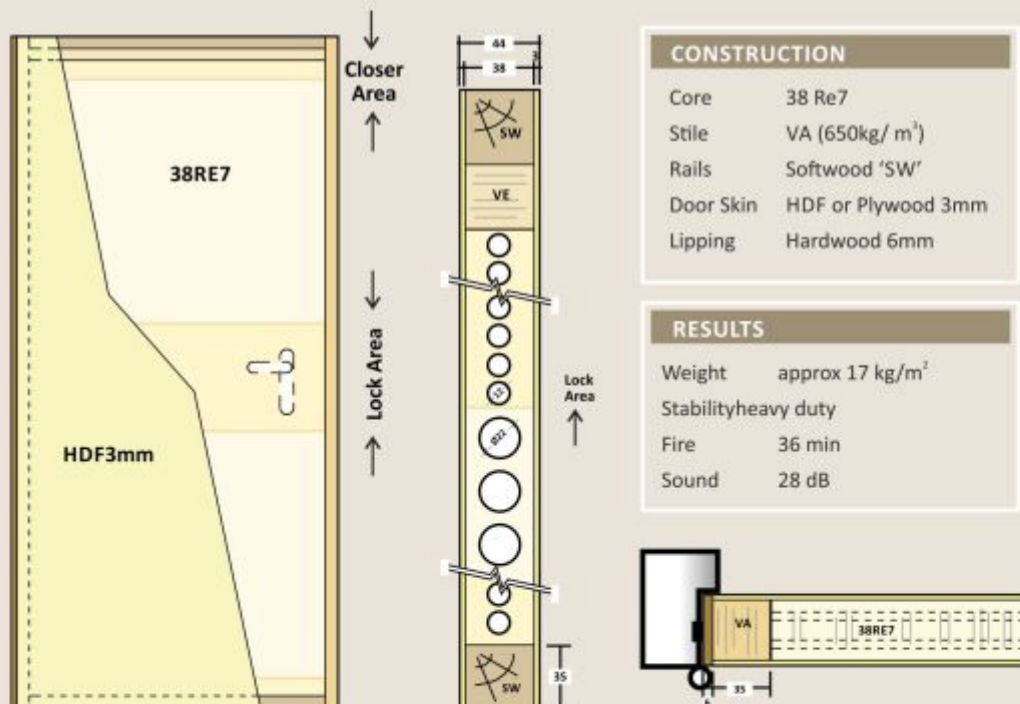

60 MINUTES DOOR-SET CONSTRUCTION



54 MM THICKNESS – RAW DOOR LEAF


6 mm HDF skin on each face + 42 mm Sauerland Extruded Infill + Stiles and Rails of Hardwood (Density: 650+/m³ at Moisture Content of 8-12%).

In addition, strip of 20 mm x 2 mm Graphite Intumescent Strip will be installed on 3 sides on the Door Frame and 1 strip of 20mm x 2mm Graphite Intumescent Strip in bottom side of the Door leaf.

Decorative Overlay will be as per Customer's requirement.

Finished Door thickness will vary based on Overlay thickness

We can also offer 4 mm PVC coated Graphite intumescent strips in Brown, Black or White Colour for bettering the aesthetics value.

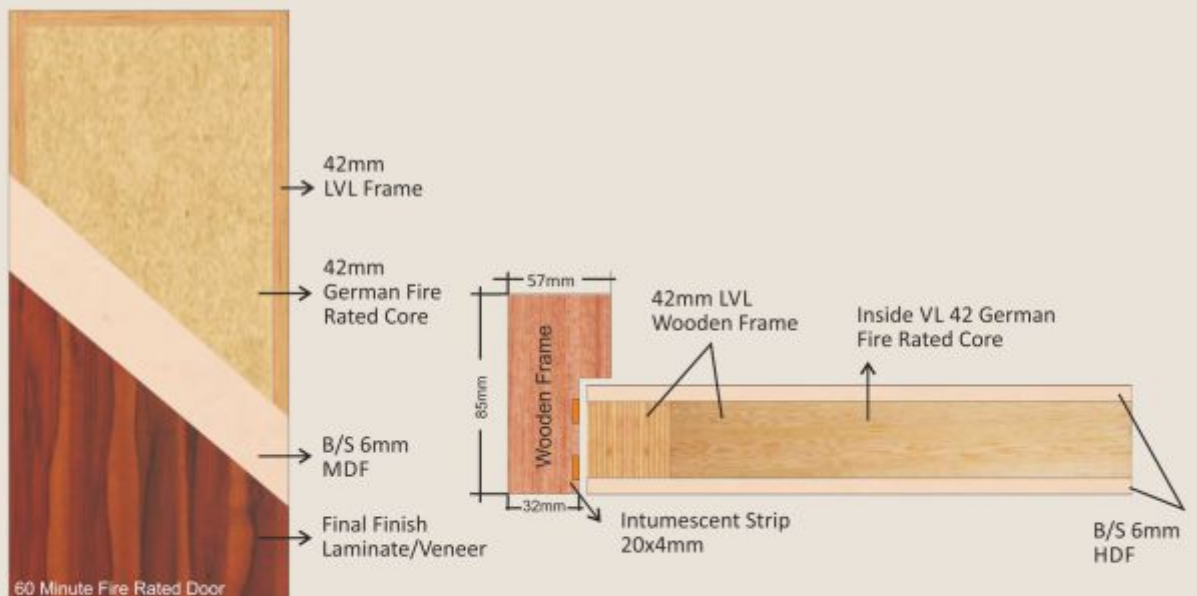


Certified by:
CBRI ROORKEE & IPRITI



120 MINUTES DOOR-SET CONSTRUCTION

60 MM THICKNESS – RAW DOOR LEAF

Dormak joins hands with “PROMAT” to offer CBRI & IPRITI tested Fire Doors with NCBN technology, is a strong, light weight non-combustible building board, made of a calcium silicate composition and being gypsum-free, --The Indian Market has for long been waiting for tested, Reliable and Authentic Fire doors. We at Dormak offer 120 minutes PROMINA - 60 minute doors both have passed the Indian Standard test at CBRI & IPRITI.

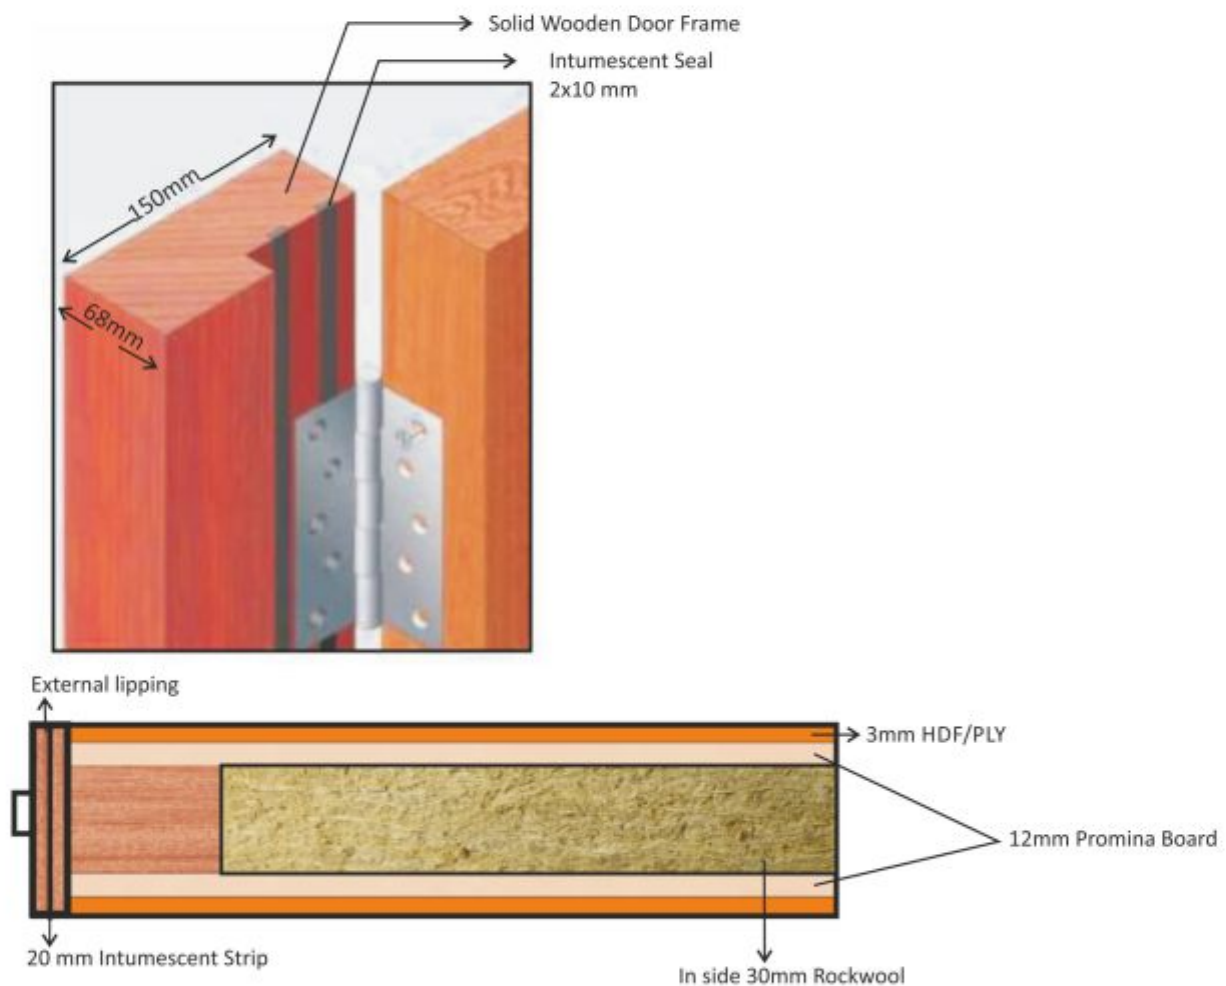

FIRE RATED DOORS



HOW DOES FIRE RATED DOOR WORKS AT THE TIME OF FIRE?

When there is fire, the temperature increases from 600°C to 1000°C in couple of minutes and that burns out an ordinary wooden door in 5 to 8 minutes. Fire-rated door has a typical design to stand and perform in case of fire. Special high density door frame (door jamb) as per rating of fire rating 30 min, 60 min, 120 min are used, which has been specially designed. These frames have graphite, intumescent strips - which seal the door in case of fire, so that smoke can't enter in the room.

Fire-rated core: While making the door shutter, special fire-rated door cores separately for 30 min, 60 min and 120 min have been used. These door cores have been designed with lots of research and development and have special structure. These door cores have property of slow burning and doesn't allow fire to come another side of door for a specific time and at the same time, it provides insulation (that the temperature of inside the room doesn't increase much because of outside fire.)

ACOUSTIC DOORS

The Acoustical features benefit on daily basis by keeping out or keeping in the sounds, restricting the noise pollution to a great extent.

BENEFITS OF ACOUSTIC DOORS

We can offer Acoustic Doors ranging from 28 dB to 42 dB.

We manufacture Acoustic Doors as per End customer's requirements to offer Cost- effective solutions in such high technology driven products.

The Door construction remains the same as for Normal Flush Doors using Sauerland Tubular or Solid or Sandwich core depending on the Acoustic Rating requirement in addition to Drop Down seals + Perimeter Seals as a standard offering.


This offers us a unique Hybrid Retail solution for Project orders wherein the variety in Acoustic Performances while maintaining the same decorative option.

We call it "Work from Home Door Solutions".




ACOUSTIC DOOR CONSTRUCTION

In associate with:

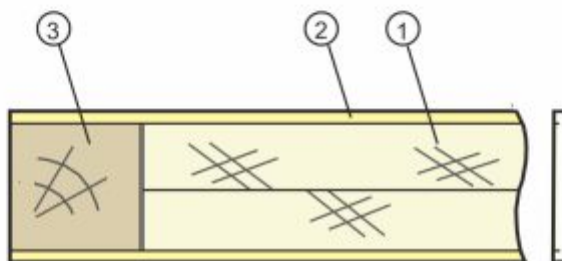

- 1 : Sandwich Board 38 S2 (2x19VL Nailed)
- 2 : HDF - 3mm
- 3 : Softwood 40mm

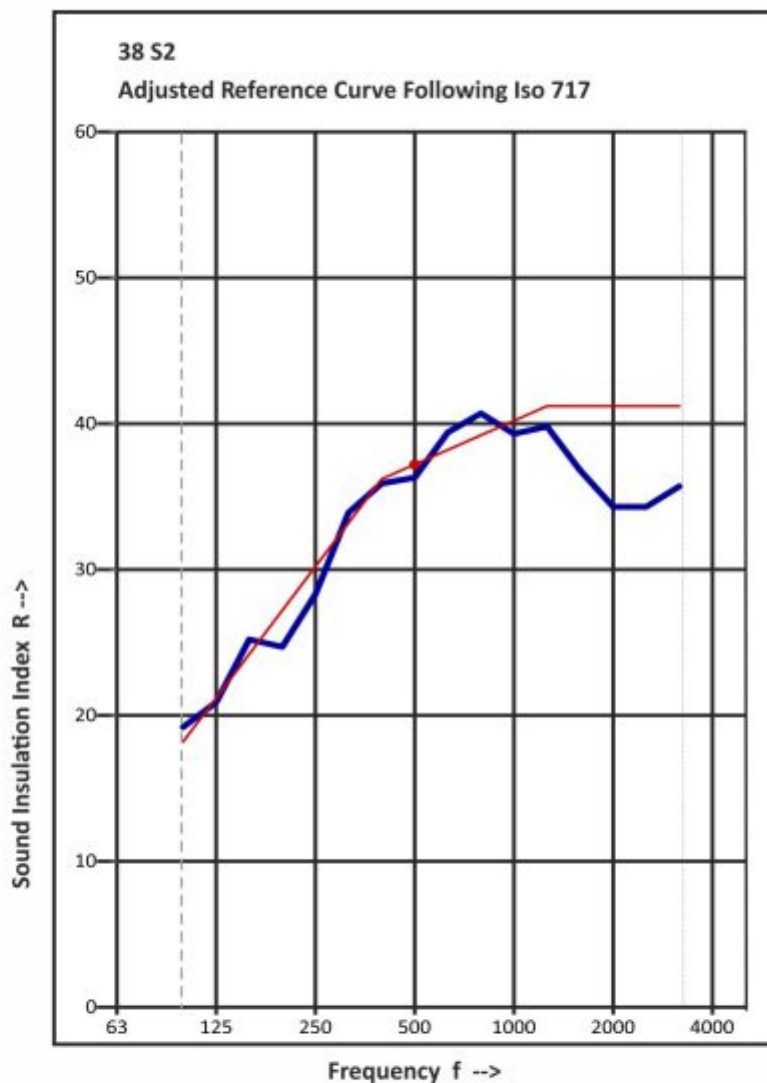

Frequency [Hz]	R [dB]
50	--
63	--
80	--
100	19,2
125	20,9
160	25,2
200	24,7
250	28,3
315	33,9
400	35,9
500	36,3
630	39,4
800	40,7
1000	39,3
1250	39,8
1600	36,8
2000	34,3
2500	34,3
3150	35,7
4000	--
5000	--

Test Opening: 2,00 m²
 Weight Of Test Specimen: 24,9 Kg/m²
 Temperature [°c]: 18
 Humidity [%]: 56
 Source Room Volumes: 72 m³
 Receiver Room Volumes: 70 m³

Airborne Sound

Insulation RW (C, Ctr) = 37,2 (-2.2; -4.6) dB

C50_3150: --- C50_5000: --- C100_5000: -1,6
 Ctr50_3150: --- Ctr50_5000: --- Ctr100_5000: -4,7

DOOR FRAMES

Dormak Frames are factory finished to match the aesthetic look of the door leaf and give a coordinated look to your vision. Other than wooden frames we have LVL & Plywood frames which are wrapped with veneer and CPL to match the finish of Doors.


Dormak frames are made using best quality wood which is kiln dried, imparting its tolerance to seasonal variations in weather. These frames are available in varying surface finishes be it natural, stained, painted, laminated, or veneered. To further enhance the look, architrave is used which covers the gap between wall and frame.

Architrave size can be customized as per customer's requirement.





REBATED FRAMES

Rebated frames are made using solid hardwood and are extremely stable.

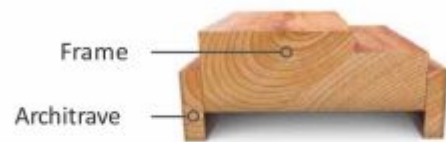



STEAM BEECH FRAMES

Steam Beach is a good option for all type of polish and paint.

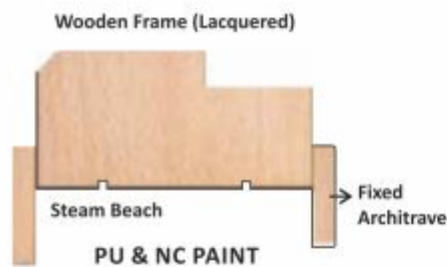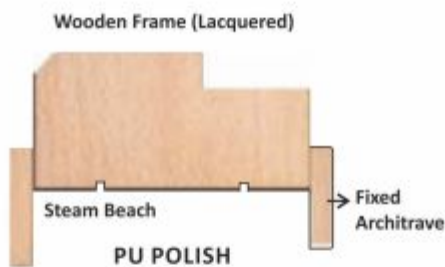



YELLOW CEDAR FRAME

Yellow Cedar is a good wood. It is a very stable wood and has lowest expansion & contraction:

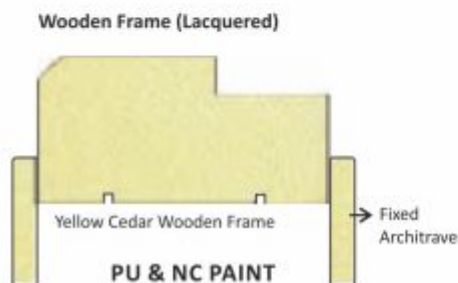
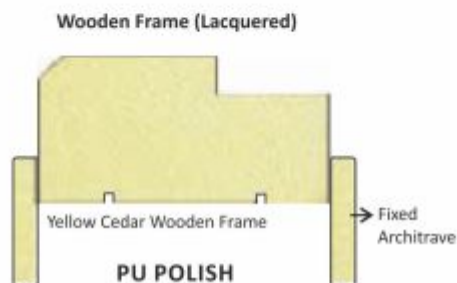


LVL FRAME



Laminated Veneer Lumber frame is an engineered wood product that uses multiple layers of thin wood assembled with adhesives which imparts extreme strength.

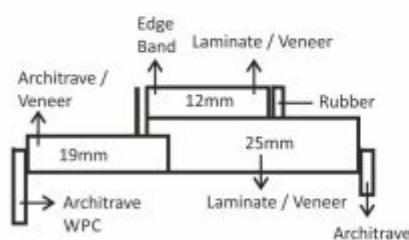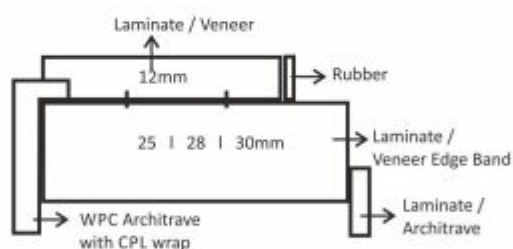



Standard Steam Beech Door Frame

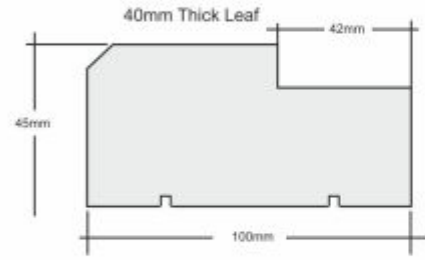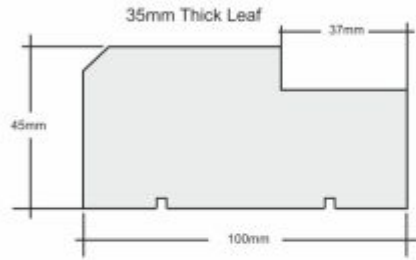



With Insulation Rubber

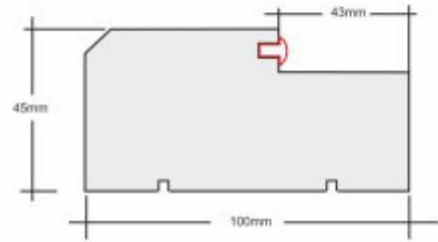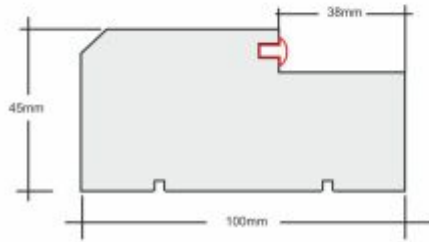


Telescopic frame with Paint/polish finish

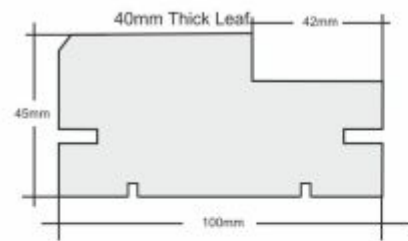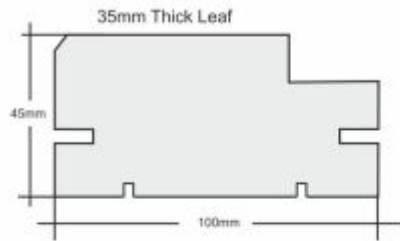


Telescopic frame with Paint/polish finish
Insulation Rubber Fixed

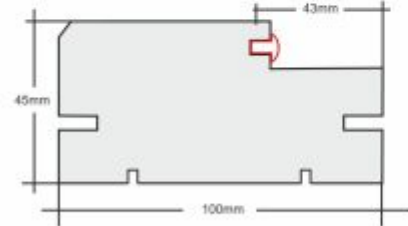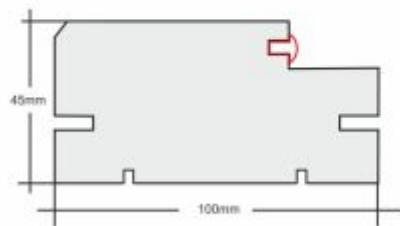

Extensible Door Frame with Fixed Architrave

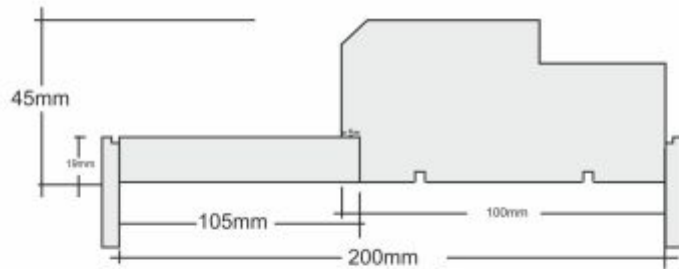


Extensible Door Frame with Telescopic Architrave

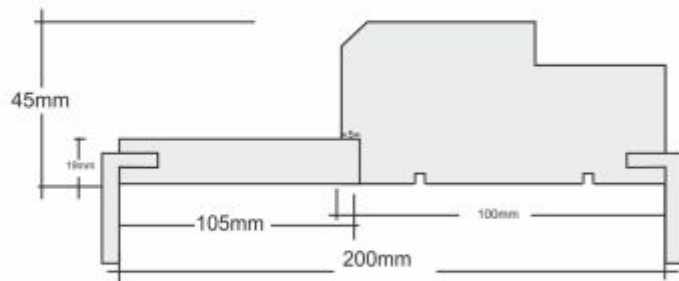

ARCHITRAVE

Architraves are interior mouldings fitted around a door frame or a window. They allow you to hide door joints and other rough surfaces by acting as a trim where the joints meet the walls or the floor. Architrave are typically available in a range of materials and finishes, most commonly MDF and Solid Oak.

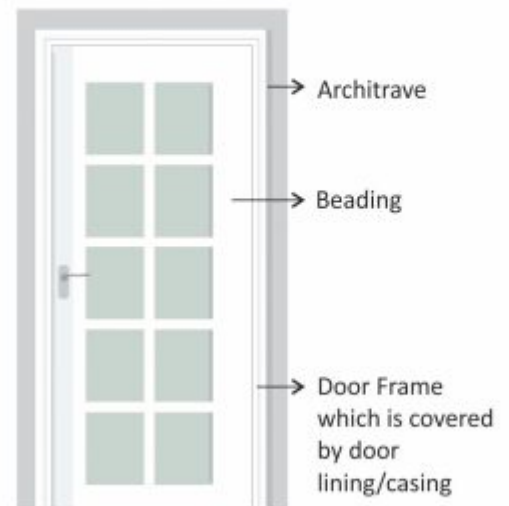

INSULATION RUBBER is available as per design of frame

Available Width of Frame:
100mm, 125mm, 150mm, 200mm, 250mm

Available Thickness of Frame: **45mm**

Available Sizes (Structural Opening)

2400 x 750	2140 x 750
2400 x 920	2140 x 920
2400 x 1050	2140 x 1050
2400 x 1200	2140 x 1200

BENEFITS OF PRE FINISHED DOOR FRAMES

- Easy Installation
- Suitable for Indian Climatic condition
- Economical
- Eco-friendly
- Installation at finishing stage
- Saves time and money
- Wide variety of shades & designs available.



Miter Joint




Straight Joint

* Insulation Rubber is available in all the frame.

* Frames are available in Teak, Sapeli, Walnut, Oak and Steam Beach Veneer

DOOR FRAMES


WALL VIEW OF DOOR FRAME

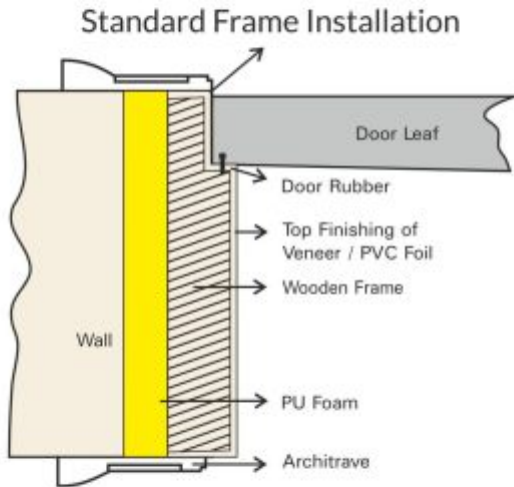

SECTION OF ARCHITRAVES



TELESCOPIC ARCHITRAVE






50X10 PLAIN



30X10 PLAIN


SELECTION OF DOOR FRAME

Measurement of Door Frame

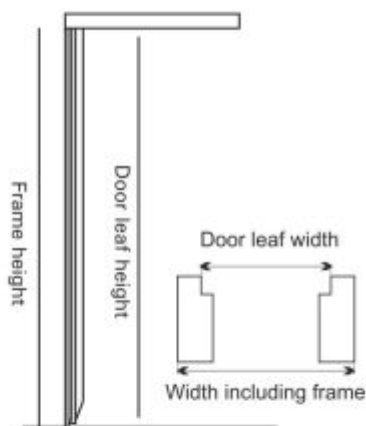


OPENING DOOR DIRECTIONS


LHI (LEFT HAND INSIDE)

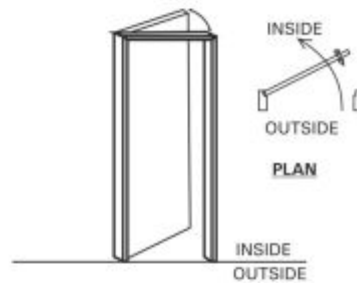


RHI (RIGHT HAND INSIDE)



LHO (LEFT HAND OUTSIDE)



RHO (RIGHT HAND OUTSIDE)

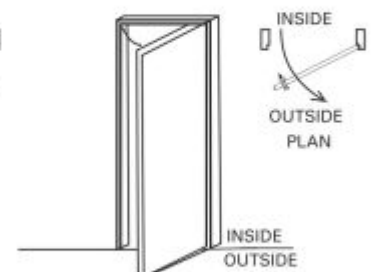

INTERNAL CONSTRUCTION OF DOORS

VENEER DOOR



Hard Wood/Pine Wood Filling



Solid Particle Filling



Tubular Particle Filling

LAMINATED DOOR



Hard Wood/Pine Wood Filling




Solid Particle Filling



Tubular Particle Filling

METHOD OF INSTALLATION

1

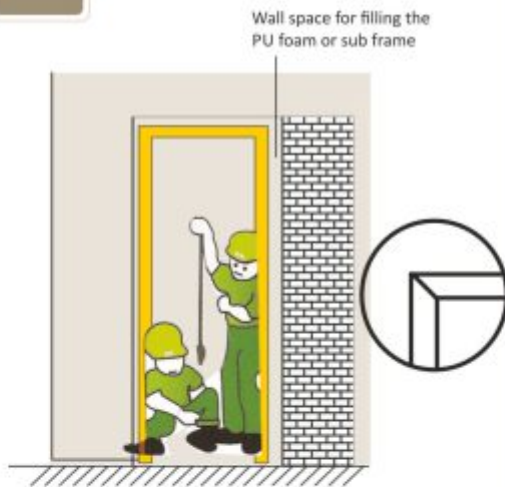

Necessary handling before fixing the door frame.

- a. The wall opening should be firm and check alignment.
- b. Measure the level, prepare fixing the door frame up.

2



Filling of PU Foam

3



Fixation of architraves

Fix the architraves up on the door frame and also on the wall with adhesive or nails after completion of the wall surface decoration.

4



Fixation of maintenance of the door

- a. Check whether the door is smooth and firm when open it after fixing the hinge and door lockup.
- b. Cover the door frame with PVC protective membrane after fixing the whole set door and move it away when you start to use the door

INSTRUCTION

FOR DOOR STORAGE, INSTALLATION & MAINTENANCE

1. These doors are Interior Doors.
2. All doors should have at least ¼" (6MM) lipping on all four sides compulsory to protect the HDF skin / core-face veneer edges from britling, damage of corners swelling etc.
3. All doors should have a gap of 4mm after fitting on all four sides equally from the door frame after fitting because wood expands due to temperature & humidity fluctuations, especially rainy season, when doors jam.
4. Fit the doors without cutting (in original form) for best results. Only if required can be cut by ½" (maximum) from both sides equally and can be cut by 1" (maximum) from the top (height). Do not cut the doors from the bottom.
5. All WC & bathroom doors should have a gap of ¾" to 1" (maximum) from the tile/floor level.
6. All doors should be stacked properly on minimum 3 equal wooden pieces placed at equal interval, the stacking area should be dry, ventilated, elevate flat & clean surface to prevent scratches on surface, and should be covered with plastic sheet.
7. Fit door stoppers immediately on erection (fitting) to avoid banging and subsequent cracks associated with it. fit aldop/cylindrical locks or motorized locks to avoid warpage.
8. All doors on all six sides should be painted /polished /melamine/Pu coated immediately on fitting to avoid undue absorption of moisture, swelling, and fungus.
9. On delivery minor scratches not distracting the general appearances will not be considered as a defect. After proper inspection on delivery, any complaint later regarding damaged edges, scratches on surface, any chemical or water stains, damage of moulding area will not be entertained for replacement.
10. Door frame should be properly aligned with each other.
11. The door frame slot should be equal through and fro equal in size of door.
12. While fixing the frame it should be aligned properly to avoid bending of the door.
13. Do not use Petrol or such harmful chemical for cleaning for doors as it may cause damage to doors.
14. For trimming Use good sharpen or a new blade to avoid chipping on edges.
15. Use full threaded screws and not nails. Fix them with screw driver and not with hammer
16. On Flush Doors Put the primer coat immediately after you receive the delivery to protect it from climate condition.

WARRANTY OF DOORS VOID FOR DAMAGE, MAINTAINENCE OR REPLACEMENT
IF ANY OF THE ABOVE INSTRUCTION ARE NOT FOLLOWED

DOOR PACKAGING



Dormak adopts various types of packaging as per the product and where it needs to be delivered.

We have these packaging options

1. PVC Cover
2. Corrugated Packing
3. LD Shrink Packaging
4. Stretch Film
5. Protection film with corner protection
6. Palleting as per need





ACHIEVEMENTS & RESULTS

12 YEARS OF EXPERIENCE

Dormak have 12 years of rich experience of making doors and we have developed capacity to cater complex and large projects and we have developed deep understanding of doors and its details.

5 YEARS OF Warranty

Dormak offers 5 years manufacturing warranty for all products. We stand with our customers when it comes to complaint handling and providing services.

5 DOOR CATEGORY

5 different kinds of doors we are serving in our portfolio

OUR PRESTIGIOUS CLIENTS

Dormak has more than 500 corporate customers regular working with us and more than 5000 satisfied retail customers.

1.5 MILLION DOORS PRODUCTION

We have successfully produced 1.5 Million doors in last 12 years with more than 200 designs and keep counting.

AWARDS & CERTIFICATES

- Brand Equity Awards
- Quality Mark Trust
- Udyog Ratna award

ORDER SIZE

Dormak proudly serving order of \$30 - 1\$ million

12000 SQ.M SPACE

Our manufacturing services area is 12000 Sq.M. area.

150 EMPLOYEES

150 Dormakians working delicately to develop and serve.

DORMAK MAKING AN IDEAL ENTRANCE

Dormak believes that every door is a portal to a new experience. As such, we're committed to making those experiences exciting, beautiful and consistent.

With over 12 years of experience in the door making industry, Dormak remains a prominent force or face by combining creative innovation and flawless quality to deliver fantastic products. By investing heavily in our dedicated R&D department, we're able to fully utilize our expertise and high-tech equipment to invent and produce a wide range of highly effective doors. This allows us to make doors that covers everything from enhanced fire-safety technology of protection to specialized doors designed for acoustics.

Our expert team of professionals and propensity for innovation puts us in the perfect position to work on critical projects as well as large-scale proposals. We are dedicated to putting our inventive nature towards the betterment of the Earth as well as mankind by using sustainable wood and alternative products. As a result, we develop non-toxic doors that are safer for the people who use them and the environment they inevitably return to.

We don't just make doors, we make gateways to excellence.



WHY DORMAK

"Dormak" - Making an ideal Entrance

- We at Dormak manufacture eco-friendly doors; hence all Dormak products are manufactured with globally sourced material and technology. Dormak doors are environment-friendly products as they consume 50% lesser wood than any other traditional door and manufacturing process includes processing/ treatment against borer and fungus. We also take care of screw holding capacity, lock area reinforcement, water resistance bonding, and dimensional stability parameters to deliver a superior building product to enhance the beauty of all interiors.
- It's a value for money proposition when you select a Dormak door.
- Dormak is associated with world's leading brands like Masonite International USA and Sauerland Germany.
- Dormak is one of the leading manufacturers of doors. Dormak's wide range of doors are sold through our wide network throughout the country to retail customers, architects, builders & developers and institutions.
- Dormak has world class state of the art facility which is dedicated to manufacturing of doors only.
- Dormak is well equipped with best wood working machines with a team of qualified and efficient manpower.
- Dormak has a knowledgeable network and team of professionals to understand and provide right solution for customer needs time to time.
- Dormak offers a wide range of infill material-Eco-friendly tubular particle board cores from a PEFC certificate Co of German Origin, Solid particle board and conventional wooden block board core etc.
- Dormak has a spirit of innovation that is completely concerned with customer focused dedication in product development. We keep developing innovative products and the PRE Hung door frames will be the next and many more to follow to meet your future requirements.
- In a short span of time Dormak, marked up great success in Interior doors, with eye-catching door designs and unique styles that are only available with Dormak, we offer absolute, unbeatable value in entry doors, that includes Veneer, Membrane, Premium coated designer laminated and value added products with customized options of colors and designs.



MISSION

Our mission is to design premium quality doors that keep you safe while also preserving the environment by using eco-friendly material.



VISION

To be the world's leading door manufacturer that's dedicated to creating a safer, non-toxic world for our customers, staff, partners and the environment.

JITENDRA GOYAL:

The man whose brand Dormak made doors fashionable and exclusive -
Dormak won the Quality Mark Trust Award in 2015



As per the age old adage, “The doors of opportunity are always open for people who have the vision.” This is absolutely true for people like Jitendra Goyal, a visionary who saw the opportunity beyond the closed minds of people who told him that making doors does not suit entrepreneurs.



<https://www.forbesindia.com/article/brand-connect/jitendra-goyal-the-man-whose-brand-dormak-made-doors-fashionable-and-exclusive/61401/1>

Revolutionizing the manufacturing of INTERNATIONAL QUALITY DOORS.

IS 2202 (PT-1) :1999



CM/L:8400032606



In association with:



DORMAK INTERIO PVT. LTD.

FACTORY WORKS:

Khasra No.1103, Bankey Bihari Industrial Area,
Gram - Dhera, Jatawali, Jaipur,-303806, Rajasthan

CORPORATE OFFICE:

Shop No. 221-223 Fourth Floor, Jangid Complex,
Near Sunny Trade Center,
New Aatish Market, Gopalpura, Jaipur -302020

9251441023 | www.dormak.com | info@dormak.com