



IS : 8034



CM/L-7553379

IS : 14220



CM/L-7865196

IS : 9283



CM/L.7200136705



DELITE[®] PUMPS

New Technology with Quality Perfection





Various Types of Quality Assurance Pumps

२५

साल से एक
विश्वासनीय नाम



Characteristics		DP3RF (Water Filled)	DP4RF/RFH (Water Filled)	DP4MF (Water Filled)
Outlet Size	MM	25	25 to 50	50 to 65
	Inch	1"	1" to 2"	2" to 2.5"
Discharge	LPM	10 to 80	15 to 220	50 to 360
Head Range	Meter	6 to 110	10 to 415	15 to 55
Motor Rating	Kw	0.37 to 1.1	0.37 to 5.5	1.5 to 3.7
	H.P.	0.5 to 1.5	0.5 to 7.5	2 to 5
Stage	No	6 to 29	4 to 60	4 to 14
RPM	50Hz	2850	2850	2850
	60Hz	3420	3420	3420

Special Features :



- Hardened graded cast iron with good finishing & coated paint
- Cast iron housing with precisely L.B. bush bearing counter provision for pump set.
- Spring loaded diaphragms & special use magnet provision in motor base.



DP6RF

(Radial Flow)

DP6RFH

(Radial Flow High Head)

DP6MF

(Mixed Flow)

DP6/7MF & DP6/8MF

Janata Model

DP8MF/RF


(Mixed Flow)

50 to 65	65 to 75	65 to 75	75 to 100	75 to 100
2" to 2.5"	2" to 2.5"	2.5" to 3"	3" to 4"	3" to 4"
40 to 500	50 to 800	200 to 1250	420 to 1600	400 to 2200
8 to 400	6 to 450	8 to 280	12 to 170	25 to 400
2.2 to 22	2.2 to 22	2.2 to 22	4.6 to 22	7.5 to 63
3 to 30	3 to 30	3 to 30	5 to 30	10 to 85
3 to 35	3 to 30	3 to 25	2 to 12	3 to 18
2850	2850	2850	2850	2850
3420	3420	3420	3450	3450

Special Features :



- Sand proof narul impeller with S.S. ring & S.S. impeller for better pump efficiency.
- Harden S.S chrome sleeves used in pump to ensure long life & stand wear resistance against sand.



- Specially treated low friction Teflon carbon bearing sets in sub motors.



Self Priming

Domestic

Openwell Submersible Pumps

Domestic

Openwell Submersible Pumps

Royal Series


Openwell Submersible Pumps

REGAL Series

Vertical Openwell Submersible Pumps (RF/MF)

15 to 25	25 to 65	50 to 75	50 to 100	65 to 100
0.5" to 1"	1" to 2.5"	2" to 3"	2" to 4"	2.5" to 4"
5 to 50	60 to 550	160 to 1200	130 to 2500	200 to 1600
5 to 35	4 to 30	6 to 40	6 to 60	8 to 165
0.37 to 0.75	0.37 to 1.5	2.2 to 3.7	2.2 to 15	2.2 to 15
0.5 to 1	0.5 to 2.0	3 to 5	3 to 20	3 to 20
1	1	1	1	1 to 10
2820	2850	2850	2850	2850
3420	3420	3420	3420	3420



Special Features :



- Use in stator CRNO stamping with varnish coating & powder coating on brazing copper rotor (with harden both sleeve diameter).

USE PVC Flat Cable and EC Grade copper winding wire best quality for better conductivity



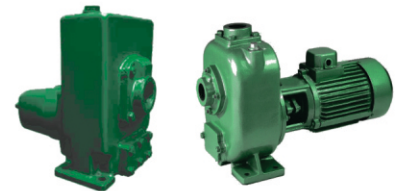

Characteristics Technical Specifications

INDUCTION MOTOR

CENTRIFUGAL MONOBLOCK PUMP

PRESSURE BUSTER PUMP

SELF PRIMING MUD PUMP

Range	0.25. HP to 30 HP	0.5 HP to 50 HP	0.5 HP to 2 HP	0.5 HP to 7.5 HP
Type	Foot Mounted/ Flange Mounted	Centrifugal Monoblock Pump	3 to 6 Stage	Self Priming & Non-Clog
Pipe Size	63 to 250	25mm, 40mm, 50mm, 65mm, 80mm, 100mm	24 to 100 LTR	32mm, 40mm, 50mm, 65mm, 80mm,
Head	750, 1000, 1500, 3000 RPM	4 to 90 MTR	20 to 260 LPM	6 to 30 mtr
Discharge	-----	60 to 2160 LPM	2 to 8 Bathroom	50 to 1250 LPM
Power Supply	Three Phase Single Phase	Three Phase Single Phase	Three Phase Single Phase	Three Phase / Single Phase
Application	Domestic & Commercial	Fire, Agriculture, Industries	Hotel, Bungalows, Buildings	Flood, Marine, Basement etc

Special Features :



- Sand proof narul impeller with S.S. ring & S.S. impeller for batter pump efficiency.
- Harden S.S chrome sleeves used in pump to ensure long life & stand wear resistance against sand.



- Specially treated low friction Teflon carbon bearing sets in sub motors.



PHED Rajasthan

कृषियंत्रअनुदान




Characteristics Technical Specifications

SUBMERSIBLE MUD PUMP

SEWAGE MUD PUMP

Range	0.5 HP to 50 HP	0.5 HP to 20 HP
Type	Portable (side outlet) Dewatering (Top outlet)	Submersible Pump
Pipe Size	40mm, 50mm, 65mm, 80mm, 100mm	40mm, 50mm, 65mm, 80mm, 100mm
Head	3 to 60 mtr	4 to 60 mtr
Discharge	40 to 8000 LPM	40 to 3200 LPM
Power Supply	Three Phase / Single Phase	Three Phase / Single Phase
Application	Kitchen, Manhole, Quarries	Flood, Tunneling, Mining Ind.

Special Features :



- Use in stator CRNO stamping with varnish coating & powder coating on brazing copper rotor (with harden both sleeve diameter).

USE PVC Flat Cable and EC Grade copper winding wire best quality for better conductivity





Company Profile :

Delite Pump - With our quality conscious approach we have consolidated ourselves as a reliable name to do business with. Our efforts have made us a proud recipient of the very prestigious ISO certification 9001 : 2008 & IS : 8034, CM/L 7553379 & IS : 14220, CM/L 7865196, certification mark with the best quality pumps ahemdabad - 24.

The unique and sophisticated structural design in parts quality and elegance to our products. The global market reckons with our products as we are capable to supply with the specific demands

We resolutely conduct market research to keep ourselves abreast with the advanced technology and to know the market preferences in the consumer durable products. Our team of experts and adept personnel endeavor to adopt these techniques in our unit to develop best quality and durable products.

We also provide uniquely customer specific pumping solutions. We manufacture Pumps that are specifically designed to fulfill the specifications & requirements of the customer. From the pumping of clear fluids to handling fibrous or even highly corrosive fluids such as Phosphoric acid, we offer a diversity of material options for the construction of the pumps.

We make sure that our clients are satisfied with every aspect of our business and relationship by providing them quality in products, delivery, service and price.

Quality Policy :

We are committed to achieve international standards in manufacture & supply of pumping systems. Quality of our product and total customer satisfaction. Which shall always remain the hallmark of **DELITE PUMPS**.





OUR NETWORK



Ahmedabad

Mfg. of

DELITE PUMPS

40/42, Tirupati Estate, B/h. Amber Cinema, Bapunagar, Ahmedabad-380 024. Gujarat.

Phone : +91-79-22746175, 22776177

Mobile : +91-9426073968

E-mail : mail@delitepumps.com

Website : www.delitepumps.com

