



ISI MARKED



MS CERT



ISO 9001:2008
CERTIFIED

ISO 9001 : 2015

ELECTRO POLES PRODUCTS PVT. LTD.

AN ISO 9001 & BIS CERTIFIED COMPANY

Overall Height 7.0 MTR Height Above ground 5.75 MTR Planting Depth	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-01	4000mm	1500mm	1500mm	62	127	80
410-SP-02	4500mm	1500mm	1500mm	73	154	96
410-SP-03	5000mm	2000mm	2000mm	85	180	111


Overall Height 8.0 MTR Height Above ground 6.50 MTR Planting Depth 1.50 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-10	4500mm	1750mm	1750mm	70	112	53
410-SP-11	5000mm	2000mm	2000mm	83	135	63
410-SP-12	5500mm	2250mm	2250mm	97	158	74
410-SP-13	5800mm	2500mm	2500mm	101	206	120
410-SP-14	6100mm	2750mm	2750mm	111	220	131
410-SP-15	6500mm	3000mm	3000mm	119	243	140

Overall Height 9.0 MTR Height Above ground 7.50 MTR Planting Depth 1.50 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-25	5000mm	2000mm	2000mm	78	96	34
410-SP-26	5500mm	2250mm	2250mm	92	116	41
410-SP-27	6000mm	2500mm	2500mm	108	136	47
410-SP-28	6500mm	2750mm	2750mm	113	177	76
410-SP-29	7000mm	3000mm	3000mm	125	190	83
410-SP-30	7500mm	3250mm	3250mm	133	209	90
410-SP-31	8000mm	3500mm	3500mm	147	251	139
410-SP-32	8500mm	3750mm	3750mm	154	269	146
410-SP-33	9000mm	4000mm	4000mm	164	297	157

Overall Height 7.5 MTR Height Above ground 6.25 MTR Planting Depth 1.25 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-04	4500mm	1500mm	1500mm	67	117	64
410-SP-05	5000mm	1750mm	1750mm	79	137	76
410-SP-06	5500mm	2000mm	2000mm	93	165	89
410-SP-07	6000mm	2250mm	2250mm	97	215	143
410-SP-08	6500mm	2500mm	2500mm	103	229	151
410-SP-09	7000mm	2750mm	2750mm	110	253	163

Overall Height 8.5 MTR Height Above ground 7.00 MTR Planting Depth 1.50 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-16	5000mm	1750mm	1750mm	75	104	44
410-SP-17	5500mm	2000mm	2000mm	89	125	52
410-SP-18	6000mm	2250mm	2250mm	104	146	61
410-SP-19	6500mm	2500mm	2500mm	109	191	98
410-SP-20	7000mm	2750mm	2750mm	115	204	103
410-SP-21	7500mm	3000mm	3000mm	129	225	115
410-SP-22	8000mm	3250mm	3250mm	141	270	176
410-SP-23	8500mm	3500mm	3500mm	148	290	186
410-SP-24	9000mm	3750mm	3750mm	158	320	201

Overall Height 9.5 MTR Height Above ground 7.70 MTR Planting Depth 1.80 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-34	5000mm	2250mm	2250mm	122	180	76
410-SP-35	5500mm	2500mm	2500mm	129	192	80
410-SP-36	6000mm	2750mm	2750mm	137	212	85
410-SP-37	6500mm	3000mm	3000mm	153	255	133
410-SP-38	7000mm	3250mm	3250mm	160	273	140
410-SP-39	7500mm	3500mm	3500mm	170	302	151

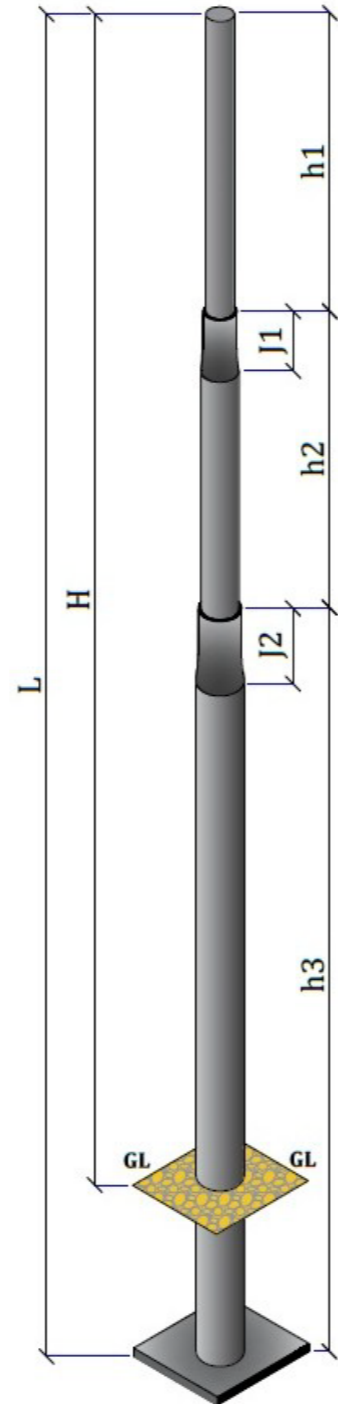

ELECTROPOLES PRODUCTS PVT. LTD.

Overall Height 10.0 MTR Height Above ground 8.20 MTR Planting Depth 1.80 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-40	5200mm	2400mm	2400mm	128	168	62
410-SP-41	5700mm	2650mm	2650mm	135	180	65
410-SP-42	6200mm	2900mm	2900mm	144	198	69
410-SP-43	6700mm	3150mm	3150mm	160	238	108
410-SP-44	7200mm	3400mm	3400mm	168	255	114
410-SP-45	7700mm	3650mm	3650mm	178	282	122
410-SP-46	8200mm	3900mm	3900mm	208	357	189
410-SP-47	8700mm	4150mm	4150mm	221	392	203
410-SP-48	9200mm	4400mm	4400mm	233	427	215

Overall Height 12.0 MTR Height Above ground 10.0 MTR Planting Depth 2.0 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-58	5800mm	3100mm	3100mm	186	192	55
410-SP-59	6300mm	3350mm	3350mm	197	206	58
410-SP-60	6800mm	3600mm	3600mm	208	228	61
410-SP-61	7300mm	3850mm	3850mm	245	289	97
410-SP-62	7800mm	4100mm	4100mm	259	317	103
410-SP-63	8300mm	4350mm	4350mm	277	345	111
410-SP-64	8800mm	4600mm	4600mm	292	371	149
410-SP-65	9300mm	4850mm	4850mm	313	423	164
410-SP-66	9800mm	5100mm	5100mm	322	445	169


Overall Height 14.5 MTR Height Above ground 12.50 MTR Planting Depth 2.0 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-73	6500mm	4000mm	4000mm	312	250	51
410-SP-74	7000mm	4250mm	4250mm	336	273	55
410-SP-75	7500mm	4500mm	4500mm	370	334	79
410-SP-76	8000mm	4750mm	4750mm	380	352	81

ELECTROPOLES PRODUCTS PVT. LTD.

Overall Height 11.0 MTR Height Above ground 8.20 MTR Planting Depth 1.80 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-49	5200mm	2400mm	2400mm	140	149	42
410-SP-50	5700mm	2650mm	2650mm	147	159	44
410-SP-51	6200mm	2900mm	2900mm	164	175	49
410-SP-52	6700mm	3150mm	3150mm	175	210	74
410-SP-53	7200mm	3400mm	3400mm	183	226	78
410-SP-54	7700mm	3650mm	3650mm	194	249	83
410-SP-55	8200mm	3900mm	3900mm	227	316	130
410-SP-56	8700mm	4150mm	4150mm	241	347	140
410-SP-57	9200mm	4400mm	4400mm	256	378	150

Overall Height 13.0 MTR Height Above ground 11.0 MTR Planting Depth 2.0 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-67	5800mm	3100mm	3100mm	261	261	69
410-SP-68	6300mm	3350mm	3350mm	281	287	75
410-SP-69	6800mm	3600mm	3600mm	302	321	81
410-SP-70	7300mm	3850mm	3850mm	312	336	108
410-SP-71	7800mm	4100mm	4100mm	333	382	118
410-SP-72	8300mm	4350mm	4350mm	343	402	121

Overall Height 16.0 MTR Height Above ground 13.70 MTR Planting Depth 2.30 MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
410-SP-77	6500mm	4000mm	4000mm	341	227	37
410-SP-78	7000mm	4250mm	4250mm	367	248	40
410-SP-79	7500mm	4500mm	4500mm	405	304	58
410-SP-80	8000mm	4750mm	4750mm	416	319	60

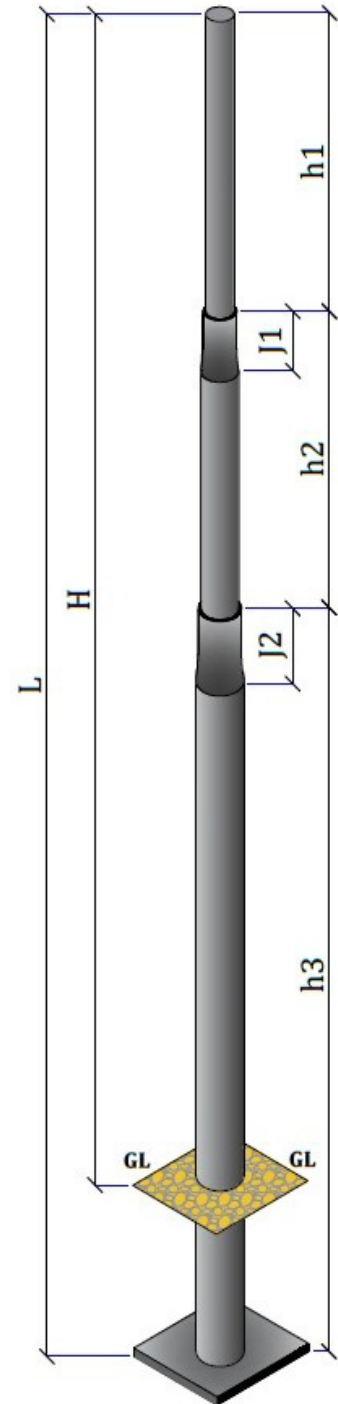

- Electro Poles Products Pvt. Ltd.(EPPPL) was incorporated in the year 2007. We are basically ISO 9001:2015 Certified company & our factory is based in Dankuni, Dist-Hooghly near Mother Dairy Gate No 3 (Blue Heaven Hotel) based in Eastern India. We have professional & experience workers working with us since inception of the company. Our factory is mostly modernised & we have state of art equipments & machineries for execution of the products. We also have a highly quality control procedure within the factory.
- You can depend on EPPPL's high quality Galvanized Steel poles for an appealing solution to your roadways & Street lighting needs. Refer overleaf for the range and specifications. We offer Swaged type Steel Tubular poles as per 410-SP-MPA & various types of brackets and accessories. EPPPL can offer M.S. Painted, Galvanized & Powder coated poles also to the Indian market for better finish & aesthetics.
- Meeting the needs of you , our customer is top priority no matter how large or small your order whether its a standard product or specifically designed to meet your requirements our focus is to provide a quality product on time and per agreed standards.
- We are reliable partner for your lighting needs.



List of Our manufacturing & suppling items :-

- M.S / G . I. Steel Tabular Poles Swaged Type used for Street Lighting, LT & HT Power Transmission, Flood lighting.
- Octagonal Poles & High Mast Poles.
- Hamilton Poles/ Revitted Poles and their accessories used for Telecom Transmission.
- Tower for Power Distribution/ Transmission.
- ERW M.S. Black & G.I. Pipe used for structural, water gas, steam, drainage.
- M.S./G.I. Cable Tray (Ladder/ Perforated Type)
- Earth Electrode & Earthing Pipe/Strip



Reg. Office:1-B, Ramlochan Mullick Street ,1st Floor, Room No. 105, Kolkata - 700073,
 Marketing Office:Eco Suite Tower, Plot II - D/22, Action Area II, 6th Floor ,Suite No : 607,
 (Near City Centre II) , Kolkata - 700156, West Bengal, India .
 Work : Santra para ,village : Kharial , P.O. Dankuni Coal Complex ,Hooghly.
 Phone No : +919874245900 ,
 Email :info@electrogroups.com
 Web : www.electrosteelproducts.com
 Mr. Abhishek Agarwal (Vice President Marketing) , Ph: +919831062522