

LIQUI MOLY

ANSYSCO ANAND LLP
 Plot NO. 19-F, Sec-2,
 Industrial Area, Parwanoo
 Distt. Solan (H.P) 173 220
 Customer Care Executive : Ph 01792-657230, 657002, 657004
 www.anandgroupindia.com

www.liqui-moly.com
 info@liqui-moly.de

No liability for misprints.
 Subject to technical
 modifications.

Find the right motor oil
 with your smartphone!



6 years in a row

7 years in a row

6 years in a row

7 years in a row




With best regards

56051408



ANAND

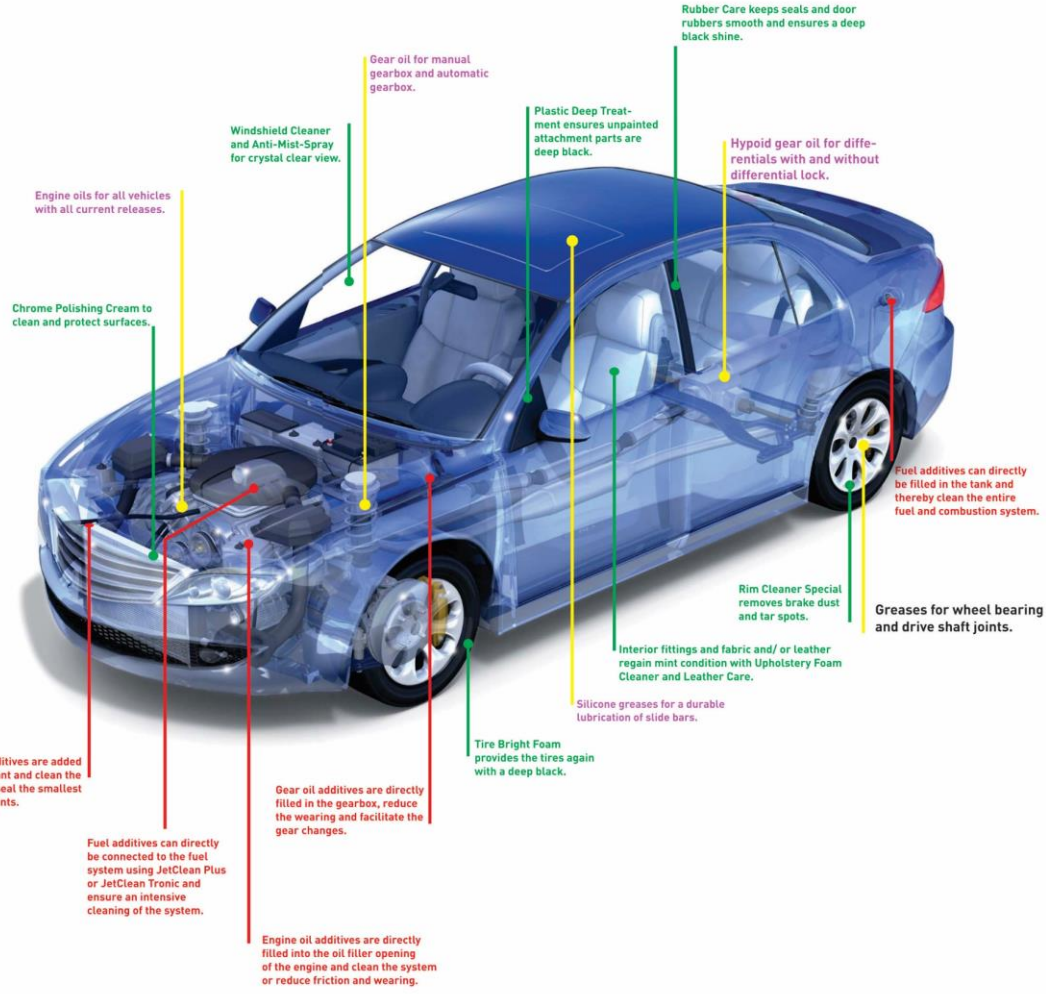

Lubricants



Lubricants

- Synthoil 0W-40
- Leichlauf HC7 5W-40
- Top Tec 4100 5W-40
- Leichlauf HC7 5W-30
- MOS2 Low Friction 15W-40
- Touring High Tec 15w-40
- Touring High Tec 10W-40
- Top Tec ATF 1200
- Top Tec ATF 1400
- Top Tec ATF 1800
- Dual Clutch Transmission oil 8100
- Gear Oil SAE 75W-90



Additives



Additives

- Engine Flush
- Radiator Flush
- Fuel Injector Cleaner
- Super Diesel Additive
- Oil Treatment
- Oil Smoke Stop
- Diesel Purge
- Radiator Stop Leak
- Gear Oil Additive
- Ceratec



Car Care



Car Care

- Auto wash Shampoo
- Polish & Wax
- Paint Gloss Cream (Carnauba Wax)
- Auto Interior Cleaner
- Rubber Care
- Wheel Rim Cleaner
- Upholstery Foam Cleaner
- Leather Care
- Chrome Gloss Cream
- Plastic Deep Care
- Klima Fresh
- Paint Cleaner
- Windshield Cleaner
- Bitumen Based Underbody Treatment
- Engine Compartment Cleaner
- Engine Sealant
- Underbody Stoneguard
- Cavity Sealant




Service Products



Service Products

- Multipurpose Grease
- LM 40
- Battery Clamp Grease
- V-Belt Spray
- Brake Anti-squeal Paste
- Engine Decarbonising - Petrol
- Engine Decarbonising - Diesel
- AC Cleaning Solvent
- Rapid Cleaner
- Rust Solvent
- AC Bacteria Cleaning Aerosol
- Throttle Valve Cleaner
- Diesel Intake Cleaner
- Proline DPF Cleaner
- Proline DPF Spulung (Flush)
- DPF Pressurised Tank
- Proline Straight Probe
- AC Cleaning Equipment
- Jet Clean Plus
- Jet Clean Compressed Air Conector
- Jet Clean Universal Adaptor Set
- Glass Repair Kit

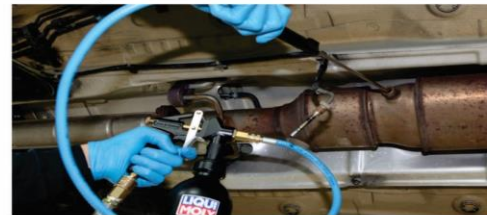

LIQUI MOLY

ABOUT LIQUI MLY

LIQUI MOLY GmbH from Ulm in south Germany offers a wide range of high-quality products such as motor oils, additives, vehicle care products and service products. Their range includes some 4000 items. LIQUI MOLY develops and tests their products in their own laboratories, manufacturers exclusively in Germany and markets all of their products themselves. LIQUI MOLY was founded some 50 years ago and is now one of the leading companies in the industry. The products are sold in Germany and in 120 other countries.

During the past few years, car drivers in Germany have repeatedly chosen LIQUI MOLY as the best brand of oil. Now the readers of Autohaus and Auto Service Praxis also share this opinion. Based on the survey by these two national journals Liqui Moly has been awarded as the no. 1 brand in Germany.



LIQUI MOLY PRODUCTS ARE THE FIRST CHOICE OF THE LEADING CAR MANUFACTURERS:

Volvo

Daimler

Renault

Audi

BMW

Volkswagon

SCANIA

Maruti Suzuki Genuine Accessories

Porsche

Caterpillar

ZF

ENGINE OILS

TOP TEC 4100 5W-40



Synthetic technology low-viscosity motor oil with extremely high performance reserves. With outstanding wear-protection formula for pump-jet engines. Reduces oil thickening through particulate drag-in. For the greatest engine performance. Secures the functional performance of the diesel particulate filter (DPF) and ensures the longest possible service life.

- Outstanding engine cleanliness
- Smooth engine running
- High lubrication reliability
- Long engine service life

Specifications & Approvals:
ACEA C3 - API SN - API CF - BMW Longlife-04 - Ford WSS-M2C 917-A - MB-Approval 229.31 - Porsche A40 - VW 502 00 - VW 505 00 - VW 505 01

Recommended for:
ACEA A3 - ACEA B4 - Fiat 9.55535-H2 - Fiat 9.55535- M2 - Fiat 9.55535-S2 - Renault RN 0700 - Renault RN 0710

Available Pack Sizes

LM Code	PRD NAME	SKU
9511	5W-40	5 L

SYNTHOIL RACE TECH GT1 10W-60



Modern, fully synthetic, high-performance engine oil formulated for use in four-stroke engines under extreme load.

- Optimum lubrication in extreme operating conditions
- High lubrication reliability
- Outstanding engine cleanliness
- High shear stability
- Extremely low oil consumption
- Mixable with all commercially available motor oils

Specifications & Approvals:
ACEA A3 - ACEA B4 - API SL - API CF

Available Pack Sizes

LM Code	PRD NAME	SKU
8909	10W-60	5 L

MOLYGEN NEW GENERATION 5W-30 & 5W-40



High performance low-friction motor oil for year round use with the combination of unconventional base oils and advanced additive technology and Molygen additives.


- Excellent wear resistance
- Smooth engine running
- Outstanding engine cleanliness
- Saves fuel and reduces pollutant emissions
- Outstanding lubrication reliability
- Excellent high and low temperature behavior

Recommended for:
ACEA A3 - ACEA B4 - API SN - API CF - BMW Longlife-01 - MB 229.5 - Porsche A40 - Renault RN 0700 - VW 502 00 - VW 505 00

Available Pack Sizes

LM Code	PRD NAME	SKU
9047	5W-30	1 L
9089	5W-30	4 L
8576	5W-40	4 L
8578	5W-40	1 L

SYNTHOIL LONGTIME PLUS 0W-30



The fully synthetic low-viscosity motor oil from the Longlife 2 generation keeps the engine perfectly clean.

- Prevents deposit formation and reduces frictional
- Outstanding lubrication reliability
- Excellent wear resistance
- Outstanding engine cleanliness
- High shear stability

Specifications & Approvals:
ACEA A1 - ACEA A5 - ACEA B1 - ACEA B5 - VW 503 00 - VW 506 00 - VW 506 01

Available Pack Sizes

LM Code	PRD NAME	SKU
1151	0W-30	5 L

SYNTHOIL ENERGY 0W-40



For the greatest engine performance! Fully synthetic low-viscosity motor oil. Fast cold start properties. Keeps oil consumption low. Prevents build-up of harmful deposits. Excellent dirt-suspending and cleaning properties keep the engine optimally clean.

- Outstanding engine cleanliness
- Optimum oil pressure under all operating conditions
- High lubrication reliability

Specifications & Approvals:
ACEA A3 - ACEA B4 - API SM - API CF

Recommended for:
BMW Longlife-98 - Ford WSS-M2C 937-A - MB 229.3 - Porsche A40 - VW 502 00 - VW 505 00

Available Pack Sizes

LM Code	PRD NAME	SKU
1360	0W-40	1 L
2451	0W-40	4 L
1364	0W-40	205 L

LEICHTLAUF HC7 5W-30



First class, modern, low-friction engine oil for year-round use.

- long engine service life
- saves fuel and reduces pollutant emissions
- outstanding engine cleanliness
- excellent wear resistance
- high lubrication reliability
- mixable with all commercially available motor oils

Specifications & Approvals:
ACEA A3 - ACEA B4 - API SN - API CF

Recommended for:
BMW Longlife-98 - Chrysler - Daihatsu - Ford - GM - Honda - Hyundai - Isuzu - Kia - Mazda - MB 229.3 - Mitsubishi - Nissan - Subaru - Suzuki - Toyota - VW 502 00 - VW 505 00

Available Pack Sizes

LM Code	PRD NAME	SKU
8541	5W-30	1 L
8461	5W-30	4 L

ENGINE OILS

LONGTIME HIGH TECH 5W-30



Synthetic technology low-friction motor oil with the latest wear-protection technology and extremely high power reserve for maximum performance.

- smooth engine running
- reduces pollutant emissions
- long engine service life
- high lubrication reliability
- reduces fuel consumption
- outstanding engine cleanliness


Specifications & Approvals:
ACEA C3 - API SN - API CF - BMW Longlife-04 - MB-Approval 229.51 - VW 502 00 - VW 505 00 - VW 505 01

Recommended for:
ACEA A3 - ACEA B4 - Fiat 9.55535-S3 - Ford WSSM2C 917-A - MB 229.31

Available Pack Sizes

LM Code	PRD NAME	SKU
9506	5W-30	1 L
1144	5W-30	4 L

TOURING HIGH TECH SUPER SHPD 15W-40



First class, modern, low-friction engine oil for year-round use. State-of-the-art multigrade motor oil developed for mixed fleet operations. High quality base oils and the latest additive technology ensure the ultimate in performance reserves and outstanding anti-wear properties over extremely long intervals between oil changes.

- extremely long oil change intervals
- Outstanding detergent and dispersant properties
- excellent wear resistance
- suitable for all diesel engines


Specifications & Approvals:
ACEA A3 - ACEA B4 - ACEA E7 - Allison C4 - API CI-4 - API SL - Deutz DOC III-10 - Global DHD-1 - JASO DH-1 - Mack EO-N, MAN M 3275-1, MB-Freigabe 228.3, Renault Trucks RLD-2, Volvo VDS-3

Recommended for:
Caterpillar ECF-1-a - Caterpillar ECF-2 - Cummins CES 20076 - Cummins CES 20077 - Cummins CES 20078 - John Deere JDQ 78 A - Mack EO-M Plus - MB 229.1 - MTU Typ 2 - Renault Trucks RLD

Available Pack Sizes

LM Code	PRD NAME	SKU
1094	THY SUPER SHPD 15W-40	1 L
1121	THY SUPER SHPD 15W-40	20 L

MOS2 LOW-FRICTION 15W-40



All-season, state-of-the-art motor oil manufactured from selected base oils. The high additive content which includes the solid lubricant molybdenum disulphide (MoS₂) ensures optimum lubrication under extreme operating conditions and with long periods between oil changes.

- Suitable for gasoline and diesel engines with and without exhaust-gas turbocharging
- Outstanding emergency-running properties
- high wear resistance

Specifications & Approvals:
ACEA A3 - ACEA B4 - API SL - API CF

Recommended for:
VW Polo, VW Vento, Maruti Swift Diesel, Dzire Diesel, Grand i10, i20, Ford Figo, Honda Amaze Petrol, City Petrol, Brio, Toyota Etios

Available Pack Sizes

LM Code	PRD NAME	SKU
2631	15W-40	4 L

LEICHTLAUF HC7 5W-40



First class, modern, low-friction engine oil for year-round use. The combination of unconventional hydrocracked-based base oils and the latest additive technology has provided an engine oil which is guaranteed to reduce oil and fuel consumption while providing for rapid oil penetration in the engine, long engine service life

- long engine service life
- smooth engine running
- high lubrication reliability
- saves fuel and reduces pollutant emissions
- mixable with all commercially available motor oils

Specifications & Approvals:
ACEA A3 - ACEA B4 - API SN - API CF - BMW Longlife-98 - MB-Approval 229.3 - Porsche A40 - VW 502 00 - VW 505 00

Available Pack Sizes

LM Code	PRD NAME	SKU
1346	5W-40	1 L
1382	5W-40	4 L
1347	5W-40	5 L
1385	5W-40	205 L

TOURING HIGH TECH SPECIAL 10W-40



High-performance, low-friction engine oil based on synthetic technology. It is suitable for year-round use in modern gasoline and passenger vehicle diesel engines with and without exhaust-gas turbocharging and charge air cooler.

- High lubrication reliability
- Smooth engine running
- Saves fuel and reduces pollutant emissions
- Excellent high and low temperature behavior

Specifications & Approvals:
API SM - API CF

Available Pack Sizes

LM Code	PRD NAME	SKU
2564	10W-40	1 L
2564	10W-40	3 L
2564	10W-40	3.5 L
2564	10W-40	205 L

TOURING HIGH TECH 15W-40



All-season high-performance motor oil with selected base oils in conjunction with new future-oriented additive technology.

- Prevents the formation of oil sludge
- Provides a stable lubricating film even under extreme operating conditions
- suitable for gasoline and diesel engines with and without exhaust-gasturbocharging
- good cleaning action
- high wear resistance

Specifications & Approvals:
ACEA A3 - ACEA B4 - ACEA E2 - Allison C4 - API SL - API CF - API CG-4 - MAN M 3275-1 - Volvo VDS

Recommended for:
Caterpillar T0-2 - Mack EO-L - MB 228.3 - MB 229.1 - MTU Typ 2 - Peugeot Citroen (PSA) 871 2295

Available Pack Sizes

LM Code	PRD NAME	SKU
1240	15W-40	1 L
1240	15W-40	3 L
1240	15W-40	3.5 L
1240	15W-40	205 L

TRANSMISSION FLUIDS

TOP TEC ATF 1200



Synthetic technology automatic transmission oil of the latest generation. Prevents build-up of harmful deposits. Arrive at your destination faster and safer with maximum transmission performance and power reserves.

- highest thermal stability
- excellent corrosion protection
- enables a multifaceted range of applications
- excellent viscosity/temperature properties
- excellent wear protection

Recommended for:

Allison TES 295 · BMW 7045 E · BMW 8072 B · BMW LA 2634 · BMW LT 71141 · Caterpillar TO-2 · Chrysler ATF +3 · Chrysler ATF +4 · Daimler NAG-1 · JWS 3309 (Aisin Warner) · MAN 339 Typ V1 · MAN 339 Typ Z1 · MAN 339 Typ Z2 · MB 236.2 ·

MAN 339 Typ Z1 · MAN 339 Typ Z2 · MB 236.2 · Subaru ATF · Voith H55.6335.XX (G 607) · Volvo 97340 · Volvo 97341 · VW G 052 162 · VW G 052 990 · VW G 055

Available Pack Sizes

LM Code	PRD NAME	SKU
3681	ATF-1200	1 L

TOP TEC ATF 1600



Top Tec ATF 1600 is a new-generation, high-performance automatic transmission fluid based on synthesis technology and modern, high-performance additives.

- Highest thermal stability
- Excellent corrosion protection
- Excellent wear resistance
- Outstanding resistance to oxidation
- Outstanding friction characteristics
- Excellent resistance to aging

Specifications & Approvals:

MB-Approval 236.14, MB 236.12

Available Pack Sizes

LM Code	PRD NAME	SKU
3659	ATF-1600	1 L

DUAL CLUTCH TRANSMISSION OIL 8100



High-performance oil based on synthetic technology and synthetic base oils. The lubricant is also suitable for use in dual-clutch transmissions that have a common oil supply for clutch, synchronization, gear set and hydraulic steering.

- Optimum stability to aging
- Excellent wear resistance
- Outstanding resistance to oxidation
- Very good low-temperature properties
- Excellent shear stability

Recommended for:

BMW 83 22 0 440 214 · BMW 83 22 2 147 477 · BMW 83 22 2 148 578 · BMW 83 22 2 148 579 · BMW DCTF-1 · BMW MTF LT-5 · Chrysler · Ford WSSM2C 936-A · MB 236.21 · Mitsubishi MZ320065 DiaQueen SSTF-I · Nissan WSS-M2C 936-A · Peugeot Citroen (PSA) 9734.S2 · Porsche 999.917.080.00 · Volvo 1161838 · Volvo 1161839 · VW G 052 182 · VW G 052 529

Available Pack Sizes

LM Code	PRD NAME	SKU
3640	Transmission Oil	1 L

TOP TEC ATF 1400



Synthetic technology automatic transmission oil of the latest generation. Prevents build-up of harmful deposits. Arrive at your destination faster and safer with maximum transmission performance and power reserves.

- Highest thermal stability
- Excellent corrosion protection
- Enables a multifaceted range of applications
- Excellent viscosity/temperature properties
- Excellent wear protection

Recommended for:

Allison C4 · Dexron III H · Ford Mercon V · Honda ATF Z1 (ausser CVT) · Hyundai SP II · Hyundai SP III · JASO 1-A · Kia SP-II · Kia SP-III · Mazda ATF M-III · Mazda ATF M-V · Mitsubishi SP-II · Mitsubishi SP-III · Nissan AT-Matic D Fluid · Nissan AT-Matic J Fluid · Nissan AT-Matic K Fluid · Toyota Type T-III · Toyota Type T-IV

Available Pack Sizes

LM Code	PRD NAME	SKU
3662	ATF-1400	1 L

TOP TEC ATF 1800



Low-viscosity high-performance oil of the new generation for automatic transmissions. It is based on synthesis technology with modern, high-performance additives.

- Excellent viscosity/temperature properties
- Prevents foam formation
- Outstanding friction characteristics
- Excellent corrosion protection
- Outstanding resistance to oxidation

Specifications & Approvals:

Dexron VI · Ford Mercon LV

Recommended for:

Aisin Warner AW-1 · BMW 83 22 2 305 396 · BMW 83 22 2 305 397 · BMW 83 22 2 152 426 · BMW 83 22 0 142 516 · BMW 83 22 2 289 720 ·

BMW M-1375.4 · Fiat 9.55550-AV5 · JWS 3324 (Aisin Warner) · Land Rover TYK 500050 · Honda ATF DW-1 · Hyundai SP IV · Mazda ATF FZ · Nissan AT-Matic S Fluid · Toyota W5 · VW G 055 005 · VW G 055 540 · VW G 060 162

Available Pack Sizes

LM Code	PRD NAME	SKU
3687	ATF-1800	1 L

HIGH PERFORMANCE GEAR OIL (GL4+) SAE 75W-90



Full synthetic transmission oil. Ensures exact friction behavior and provides outstanding ageing resistance. Exceeds the tough test requirements demanded by renowned manufacturers.

- Excellent viscosity/temperature
- Outstanding seal compatibility
- High pressure-absorption capability
- Reduces gearshift resistance
- Reduces transmission noise
- Excellent corrosion protection

Specifications & Approvals:

API GL4+ · Ford ESD-M2C 175-A

Available Pack Sizes

LM Code	PRD NAME	SKU
4434	Gear Oil	1 L

TRANSMISSION FLUIDS

BRAKE FLUID DOT 5.1



Liqui Moly DOT 5.1 brake fluid is a synthetic brake fluid based on glycol ethers, alkyl polyglycols and polyglycol esters

- Miscible and compatible with high-quality synthetic brake fluids
- Assures a high degree of lubricating action on all moving components in the hydraulic brake circuit
- Outstanding protection against the formation of steam bubbles
- High thermal stability

Specifications & Approvals:

FMVSS 116 DOT 3 · FMVSS 116 DOT 4 · FMVSS 116 DOT 5.1 · ISO 4925 Class 3 · ISO 4925 Class 4 · ISO 4925 Class 5 · SAE J 1703 · SAE J 1704

Available Pack Sizes

LM Code	PRD NAME	SKU
3092	Brake Fluid	250 ML

TRANSMISSION CLEANER



The special cleaner additive package allows all dirt to be dissolved and drained off with the next oil change. Cleaning ensures a long transmission life and soft, easy gear shifting. The cleaner is neutral to metals, plastics and rubber seals.

- For eliminating shifting problems
- Removes undesirable residues
- Assures optimum shifting performance
- Suitable for manual, hypoid, transaxle and auxiliary transmissions
- Guarantees easy gear changing

Application:

Add the cleaner before changing the gear oil. If the transmission is full, the 150 ml of old oil must be drained so that the cleaner can be

added. Then shift through all gears multiple times on the lifting platform of the warm transmission within approx. 10 minutes. Drain off the old gear oil and fill with the new gear oil in accordance with the manufacturer's specifications.

Available Pack Sizes

LM Code	PRD NAME	SKU
3321	Transmission Cleaner	350 ML

RADIATOR ADDITIVES

RADIATOR FLUSH



A concentrate specially developed for cooling systems in general but particularly those in motor vehicles.

- Dissolves contaminants containing lime and oil in radiators, heating systems, pipes and in engines
- Modern formula containing complexants with active cleaning agents.
- Removes oil and grease residues
- Neutral behavior in contact with rubber and plastics
- Compatible with antifreezes

Application:

Add contents to the cooling water. Run the heating system. Depending on the degree of

contamination let the engine run approximately 10 to 30 minutes. Drain the cleaner and flush out the cooling system with water. Fill the cooling system according to the manufacturer's instructions. The content (200 ml) is sufficient for 6.5 litres of water.

Available Pack Sizes

LM Code	PRD NAME	SKU
7998	Radiator Flush	200 ML

HYDRAULIC OIL



High-performance hydraulic oil made from high-quality raffinate. Thanks to the high thermal stability of the base oils, the aging process is significantly reduced even at elevated temperatures.

- Reduce the formation of sludge
- Improves cleanliness and promotes the reliability of the hydraulic systems
- Good corrosion protection behavior
- High lubrication reliability
- Does not attack common sealing materials

Available Pack Sizes

LM Code	PRD NAME	SKU
1117	Hydraulic Oil	1 L

ATF ADDITIVE



Optimally cares for rubber and plastic seals in steering gears and automatic transmissions.

- Leaks on transmissions and gears, caused by hardened and brittle seals, are prevented and eliminated
- Cleans holes and channels in the transmission and refreshes the oil's performance
- Reduces noise formation and improves the shifting in automatic transmissions
- Extends the life of steering gears and automatic transmissions.

Application:

Mix ATF Additive into the gear oil using the dipstick. 250 ml are sufficient for up to 8 liters of oil.

Available Pack Sizes

LM Code	PRD NAME	SKU
5335	ATF Additive	250 ML

RADIATOR STOP-LEAK



Small leaks caused by stone impacts, porous soldering points and hairline cracks in the cooling system are easy to localize (one notices that the cooling water level is sinking). LIQUI MOLY Radiator Stop-Leak completely seals such leaks immediately with ease. Secures the combustion chamber from damages caused by coolant admission.

- Compatible with conventional coolant water refiners and antifreezes
- Permanently and reliably seals hairline cracks and small leaks
- No negative side effects on the water pump or heating circuit

Application:

Shake well before use. Add contents to the cooling system at operating temperature. Start up the heater. Then drive the vehicle for at least 10 minutes. Contents will treat up to 10 liters of coolant.

Available Pack Sizes

LM Code	PRD NAME	SKU
8956	Radiator Stop-Leak	200 ML

OIL ADDITIVES

CERA TEC



Cera Tec is a high-tech ceramic wear protection and can be mixed with all commercially available oils.

- Cera Tec reduces friction and wear by using chemically and thermally extremely high-resilient ceramic compounds
- Prevents direct metal/metal contact, increasing the service life of the aggregate.
- The smooth-running effect reduces fuel consumption in gasoline and diesel engines.
- Increases smooth operation
- reduces fuel consumption

Application:

300 ml is sufficient for up to 5 liters of motor oil. Long-term effect up to 50,000 km. Shake container before use.

Available Pack Sizes

LM Code	PRD NAME	SKU
3721	Cera Tec	300 ML

ENGINE FLUSH



Engine Flush Plus is a specially formulated combination of additives and carrier fluid. In combination with the carrier fluid, the highly effective detergent and dispersant additives dissolve sludge and lacquer formers.

- Dissolves sludge and lacquer formers quickly and reliably
- All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the next oil change
- An engine which has been cleaned of deposits and contamination and which is then filled with fresh oil not contaminated with old impurities can develop its full performance characteristics

Application:

One 200 ml can is sufficient for up to 4 liters of oil. Add Engine Flush Plus to the motor oil at running temperature before changing the oil. After adding the product, allow the engine to idle for approx. 10 minutes. Then change the oil and the filter. Engine Flush Plus is compatible with all commercially available motor oils

Available Pack Sizes

LM Code	PRD NAME	SKU
1738	Engine Flush	200 ML

ENGINE OIL TREATMENT



The low-friction lubricant MoS₂ creates a heavy-duty lubricant film on all frictioning and sliding metal surfaces.

- It reduces friction, guaranteeing the aggregates run more smoothly.
- Significant fuel and oil saving
- scientifically proven wear reduction, high reliability, antifriction properties.

Application:

Add 3-5 % (50 ml per liter of oil) of Oil Additive to motor oil; in motorbikes with a wet clutch add 2 % (20 ml per liter of oil). Can be added to motor oil at any time. Shake container before use.

Available Pack Sizes

LM Code	PRD NAME	SKU
1953	Oil Treatment	200 ML

MOLYGEN MOTOR PROTECT



Synthetic and oil-soluble engine-oil additive which has been developed according to the latest technology for use in modern gasoline and diesel engines.

- Reduce mechanical wear and friction by modifying the surfaces
- Reduces fuel consumption
- Friction and wear reducing
- Increases smooth operation
- Long engine service life

Application:

Molygen Motor Protect should be added approximately every 50,000 km during oil changes. Can contents are sufficient for up to 5 liters oil. Reduce the specified oil volume

by 500 ml. For the sake of economy, the product should be added during or shortly after oil changes. Molygen Motor Protect is compatible with all commercially available mineral-based and synthetic-based engine oils.

Available Pack Sizes

LM Code	PRD NAME	SKU
1015	Molygen Motor Protect	500 ML

OIL SMOKE STOP



Oil Smoke Stop reduces the oil consumption of gasoline and diesel engines via the piston rings and valve guides.

- It prevents blue smoke and oil mist and acts against the loss in viscosity in motor oils
- increases the compression ratio and reduces engine noise
- Provides extra protection in engines with high levels of wear
- Extends the service life of catalytic converters.

Application:

One 300 ml can of Oil Smoke Stop is sufficient for 4 - 6 liters of motor oil. Do not add more than 10 %. Add to the warm motor oil during every oil change and between oil changes if oil consumption is very high.

Available Pack Sizes

LM Code	PRD NAME	SKU
2122	Oil Smoke Stop	300 ML

GEAR-OIL ADDITIVE



The MoS₂ additive creates a heavy-duty lubricant film on all frictioning and sliding metal surfaces.

- It reduces friction, wear and decreases temperature peaks
- Smoother run, softer shifting and a nearly wear-free running-in in gear wheels
- Reliability and antifriction properties are significantly increased
- Assures optimum shifting performance
- Reduces transmission noise

Application:

Gear Oil Additive is added to the gear oil - mixing takes place automatically during operation. The product is suitable for both mineral and synthetic gear oils. 2% (20g) Gear Oil Additive is sufficient for 1 liter of gear oil.

Available Pack Sizes

LM Code	PRD NAME	SKU
1040	Oil Smoke Stop	20 GM

FUEL ADDITIVES

SUPER DIESEL ADDITIVE



Super Diesel Additive contains a mixture of agents with cleaning, dispersing, material-protection and cetan-number increasing properties which has been formulated for today's engines, fuels and running conditions.

- Removes deposits in the diesel injection system and in the combustion chamber and prevents them from renewed formation
- Maintains all components in the diesel injection system
- Prevents jet needles from fusing and gumming
- Increases the cetane rating and improves the ignition performance of diesel fuel
- Ensures quiet engine running
- Protects the entire fuel system from corrosion and wear

- Optimizes the emission test values and performance of the engine
- Clean engines need less fuel and reduce emissions

Application:

One 200 ml can of the product is sufficient for 50 Liters of fuel.

Available Pack Sizes

LM Code	PRD NAME	SKU
5146	Super Diesel Additiv	200 ML

DIESEL PURGE



Removes deposits on injection nozzles and in the combustion chamber. Increases the cetane rating. Eliminates engine operation problems such as knocking in idle and provides round and quiet engine running.

- Protects the entire fuel system from corrosion
- Optimizes the emission test values
- Increases operational reliability
- Eliminates diesel knocking
- Guarantees optimum combustion
- Good corrosion protection

Application:

Perfectly compatible with all conventional diesel and biodiesel fuels. Contents are sufficient up to 75 Liters of fuel

Available Pack Sizes

LM Code	PRD NAME	SKU
1811	Diesel Purge	500 ML

SPEED TEC DIESEL



This highly modern fuel additive was specially developed to noticeably improve acceleration under partial load. Provides more driving pleasure through optimized performance yield.

- The engine starts better and even runs more smoothly.
- Improves the acceleration
- Reduces frictional losses
- Cleans the injection system
- Better drivability
- Higher performance gain

Application:

One 250 ml can is sufficient for max. 70 liters of diesel fuel. Mix the contents of the can with the diesel fuel. Mixing also takes place automatically.

Available Pack Sizes

LM Code	PRD NAME	SKU
3722	Speed Tec Diesel	250 ML

DIESEL SMOKE STOP CONCENTRATE



Diesel smoke stop (C) is a highly effective diesel fuel additive that delivers an important contemporary impact.

- The product reduces soot emissions from diesel engines by accelerated soot combustion
- Diesel smoke stop considerably improves the environmental compatibility of diesel passenger cars and trucks and prevents odor pollution and impairment of visibility
- Diesel smoke stop maintains engine performance and reduces the frequency of repairs.
- Keeps injection nozzles clean

Application:

One 250 ml of Diesel Smoke Stop for 200 liters of diesel fuel. Pour the contents of the can into the tank before filling up with fuel.

Available Pack Sizes

LM Code	PRD NAME	SKU
8368	Diesel Smoke Stop Concentrate	250 ML

FUEL INJECTION CLEANER



Highly effective combination of active agents for cleaning and protection.

- Removes deposits on injection valves, intake valves, spark plugs and in the combustion chamber and prevents them from reforming
- Eliminates start problems and rough engine running
- Cares for all components in the gasoline injection system
- Protects the entire fuel system from corrosion
- Improves the throttle response and compression
- Optimizes the emission test values and performance of the engine
- Clean engines need less fuel and reduce emissions.

Application:

One 200 ml can is sufficient for up to 45 liters of fuel. This product is effective over 2,000 km. The additive can be mixed with fuel at any time since mixing is spontaneous.

Available Pack Sizes

LM Code	PRD NAME	SKU
4036	Fuel Injection Cleaner	200 ML

SPEED TEC BENZIN



This highly modern fuel additive was specially developed to noticeably improve acceleration and throttle response under partial load.

- Provides more driving pleasure through optimized performance yield
- He engine starts better and even runs more smoothly.
- Improves the acceleration
- Optimizes engine performance
- Better drivability

Application:

One 250 ml can is sufficient for max. 70 liters of gasoline fuel. Mix the contents of the can with the gasoline fuel. Mixing also takes place automatically

Available Pack Sizes

LM Code	PRD NAME	SKU
3720	Speed Tec Benzin	250 ML

CAR CARE - INTERIOR

AUTO INTERIOR CLEANER



Cleaning liquid for intensive, gentle and fast cleaning of plastic parts and fabrics and trims in the vehicle interior. Thoroughly removes oil, grease, nicotine and other soiling. Especially suitable for removing beverage and candy leftovers and nicotine residue.

- Freshens up colors
- Simple to use
- Gentle cleaning
- Excellent cleaning effect

Application:

Spray Vehicle Interior cleaner onto the parts and surfaces to be cleaned or apply using a damp sponge or cloth. Allow to take effect according to the degree of contamination but do not allow to dry out. Next, rub in and then rub dry with a clean damp cloth. Repeat treatment if contamination persists.

Available Pack Sizes

LM Code	PRD NAME	SKU
7850	Car Interior Cleaner	250 ML

UPHOLSTERY FOAM CLEANER



Upholstery foam cleaner is an active foam cleaner which has been specially developed for gently and quickly removing dirt from various types of upholstery, velours, carpets and vehicle coverings.

- Does not leave any dirty edges after treatment.
- Gently cleans upholstery, carpets, covers and textiles
- Simple to use
- Freshens up colors

Application:

Shake vigorously before use then spray onto the surfaces to be cleaned to produce a foam. Allow to act depending on the degree of contamination (2-5 minutes). Rub in using a brush in order to remove stubborn contaminants. Wipe off residues with a damp sponge (distilled water) or allow to dry and then vacuum. Repeat process in case of heavy soiling.

Available Pack Sizes

LM Code	PRD NAME	SKU
1539	Upholstery Cleaner	300 ML

LEATHER CARE



Protects smooth leather from becoming brittle. Cleans and maintains. Excellent leather care lotion for auto, riding suit and household. Smooth leather regains its suppleness and good feeling. Manufactured from various waxes and other carefully selected care products.

- Keeps leather supple
- Protects leather components from cracking
- Excellent long-term protection

Application:

If required, clean the leather surfaces to be treated and let dry. Shake Leather Care vigorously before use. Next, pour onto a soft cloth or rag and, using circular motions, apply thinly and uniformly under light pressure. Polish off after briefly allowing it to work. Regular application will result in the optimum care and appearance.

Available Pack Sizes

LM Code	PRD NAME	SKU
7855	Leather Care	250 ML

PLASTIC DEEP CARE



Plastic Deep Treatment is a combination of agents which has been formulated to protect, treat and enhance the appearance of all plastic components in the motor vehicle

- Gives the plastic surfaces a matt-silk deep sheen
- Repels dust, dirt and water
- Can be used for inside and outside storage
- Protects and cares for all plastics
- By repeated use, badly weathered plastic surfaces can be restored to a pleasing appearance.

Application:

First clean the parts to be treated. Shake Plastic Deep Treatment vigorously before use. Next, apply evenly to a soft cloth or sponge and lightly rub in to the surface. If necessary, rub again using a dry cloth. Repeat treatment if the surface is badly weathered. Regular application gives the optimum appearance.

Available Pack Sizes

LM Code	PRD NAME	SKU
7881	Plastic Deep care	250 ML

CAR CARE - CLEANING

WINDSHIELD CLEANER FOAM



Highly effective foam cleaner. Promotes glare-free car windshields to increase safety. Dissolves and removes silicone, nicotine, insect, oil and greasy residues. Suitable for polycarbonate. Does not attack rubber, paints or plastics.

- For internal and external use
- Excellent cleaning effect
- Takes effect quickly
- High capacity

Application:

Shake can before use. Spray evenly onto the surface to be cleaned, allow to act, then wipe off with a clean cloth or paper towel.

Available Pack Sizes

LM Code	PRD NAME	SKU
1512	Windshield Cleaner Foam	300 ML

SCRATCH STOPPER



Scratch Stop is a grinding paste that does not contain silicone oil and is suitable for universal use. The product can be used to remove scratches, spray mist, stress marks and uneven finishes on colour or metallic paintwork.

- Prepares surfaces for painting
- Easy removal of weathered paint layers
- Suitable for polycarbonate
- Silicone-free
- Simple to use

Application:

Wash the vehicle thoroughly before application. Shake the tube before use. Apply the product with a cloth or sponge and work it into the affected area under light pressure

Available Pack Sizes

LM Code	PRD NAME	SKU
2320	Scratch Stopper	200 ML

FIX-CLEAR RAIN REPELLENT



Ready-Clear Rain Repellent is a combination of agents which has been specially formulated to repel rainwater from vehicle windows and helmet visors without wipers. Ready-Clear Rain Repellent increases driving safety and comfort. Prevents transmission of vibration.

- Increases driving safety
- Assures a clear view and safety

Application:

Clean and dry the window or visor. Pour Ready-Clear Rain Repellent on a clean cloth and apply under pressure with circular movements. After approximately 10 minutes, polish with a cloth until the windows are clear. It is advisable to apply the product every four weeks.

Available Pack Sizes

LM Code	PRD NAME	SKU
1590	Rain Repellent	125 ML

PAINT CLEANER (PRE-TREATMENT)



Removes tar stains and dirt, oil and grease spots. Cleans and polishes. Restores the original depth of colour. Evens out slight surfaces scratches. Removes contaminants and weathered paint particles. Cleans and polishes paintwork.

- Smooths the paint surface
- Protects against aggressive environmental influences
- Cleans even severely weathered paint
- Removes tar spots
- Easy to polish
- Suitable for polishing machines

Application:

First, the surfaces to be treated must be thoroughly cleaned and dried. Shake Paint Cleaner vigorously before use and pour onto a soft rag, polishing cloth or sponge. Apply thinly and evenly to the paint surface using light pressure and circular movements. Only treat one section at a time. Allow Paint Cleaner to dry until it forms a light coat. Remove this and polish using a clean, dry cloth.

Available Pack Sizes

LM Code	PRD NAME	SKU
1486	Paint Cleaner	500 ML

CAR CARE - CLEANING

WINDSHIELD CLEANER



Gives you a clear, smear-free view in seconds. Removes oil, silicon films and insect soiling. With citrus power. Phosphate-free and biodegradable. Dosage 1: 10.

- Increases driving safety
- Streak-free vision
- Excellent cleaning effect
- Removes exhaust deposits and preservative residues

Application:

Windshield-Cleaner is used diluted with water at the rate of 1:10. 1 litre of concentrate gives 10 litres of cleaning fluid.

Available Pack Sizes

LM Code	PRD NAME	SKU
1514	Windshield Cleaner	1 L

WINDSHIELD SUPER-CONCENTRATED CLEANER



Highly effective cleaning concentrate which has been specially formulated for vehicle windshield washer systems as well for manual cleaning of vehicle windows. With citrus power. Phosphate-free and biodegradable.

- Removes exhaust deposits and preservative residues
- Streak-free vision
- Suitable for polycarbonate
- Excellent cleaning effect
- Increases driving safety
- Does not attack plastics, rubber and paints

Application:

Windshield Super-Concentrated Cleaner is used diluted with water at 1:100 litre/concentrate/water. - 50 ml of concentrate gives 5 litres of cleaning fluid.

Available Pack Sizes

LM Code	PRD NAME	SKU
1517	Windshield Super-concentrated Cleaner	50 ML

RUBBER CARE (TYRE POLISH & CLEANER)



Maintains, cleans and beautifies door, window and trunk seals and tires. Prevents freezing-up in winter. Keeps rubber parts elastic and extends the service life. Also ideally suited for maintaining and deep cleaning car tires and rubber mats.

- Protects, cleans and treats rubber components in a single process
- Simple to use
- Silicone-free
- Freshens up rubber components and maintains their elasticity
- Prevents rubber door seals from freezing closed

Application:

Remove heavy contamination before use.

Thoroughly shake rubber care before use and apply a thin and even layer on the clean, dry rubber sealings with slight pressure using a sponge. Let air dry for some minutes. Regular use is recommended.

Available Pack Sizes

LM Code	PRD NAME	SKU
7852	Rubber Care	220 ML

ENGINE COMPARTMENT CLEANER



Engine Compartment Cleaner has been specially formulated for cleaning the engine and the engine compartment. The product dissolves oil and grease residues easily as it does tar, brake abrasion and other contaminants.

- Releases dirt, oil and grease residues
- Does not attack plastics, rubber and paints
- Fast acting
- Removes preservatives
- High washing and cleaning efficiency

Application:

Spray the parts to be cleaned from about 20-30 cm and leave to act for approx. 10-20 minutes depending on the degree of contamination. After this, wash off thoroughly with a narrow jet of water. Use LM Engine Sealant for preserving the cleaned components.

Available Pack Sizes

LM Code	PRD NAME	SKU
3326	Engine Compartment Cleaner	400 ML

CAR CARE - CLEANING

WHEEL RIM CLEANER



For gentle and intensive cleaning of aluminum rims and rims made of steel from brake abrasion and other types of soiling. Due to gel-like consistency, the product also adheres to vertical surfaces and guarantees an optimal cleaning capacity.

- The cleaning process can be controlled visually by change of colour and reaches its optimum when the cleaner on the wheel rim changes its colour (to violet)
- Very powerful wetting effect
- Excellent cleaning effect
- Does not contain acids

Application:

Shake Special Rim Cleaner vigorously before use

then spray evenly onto the contaminated rim. Note: A different spray effect (large area or spot) depending on whether the trigger is pressed quickly or slowly. Allow to act for 5 to 7 minutes depending on the degree of contamination, but do not allow to dry. For removing very stubborn deposits, use a sponge or brush to assist with cleaning. The cleaning process can be checked visually by watching for a change of color; the optimum effect has been achieved when the cleaner on the wheel rim changes color (to purple).

Available Pack Sizes

LM Code	PRD NAME	SKU
7884	Rim Cleaner	250 ML

CAVITY SEALANT



Low-solvent corrosion protection material with extremely high creeping capability and high heat resistance. Short cooling period. Migrates under and suppresses moisture. After thoroughly drying, it forms a very tough, permanently soft water-absorbent protective film.

- Outstanding corrosion protection
- This product forms a plastic, water-repellent waxy film.
- Adheres well to vertical surfaces
- Excellent creep properties

Application:

Any rust which may be present on the surfaces to be treated must be thoroughly removed before treatment. The material can be used at

low temperatures above 10 °C but creep behavior is improved if the product and the surface to be treated are at room temperature. The drying process may take several days, depending on the type of cavity being treated and the thickness of the film.

Available Pack Sizes

LM Code	PRD NAME	SKU
6108	Cavity Sealant	1 L

AUTO WASH & WAX SHAMPOO



Cleans and protects in one go. For rapid paint care. Selected waxes and surfactants help to effortlessly remove dirt and protect the paint.

- High washing and cleaning efficiency
- Suitable for polycarbonate
- Protects the paintwork against aggressive effects from the weather and the environment
- Cleaning and sealing in a single process
- With carnauba wax

Application:

Shake Car Wash & Wax vigorously before use and then mix with water. 30 ml of Car Wash & Wax (approx. 2 capfuls) is sufficient for 10 l water. Apply the mixture using a sponge to the paintwork to be cleaned and spread out for cleaning. After this, rinse well with water and leather the surface. Regular application gives the optimum results.

Available Pack Sizes

LM Code	PRD NAME	SKU
7846	Car wash & wax shampoo	250 ML

CAR CARE - POLISHING

POLISH & WAX



Wax & Polish easily cleans, freshens up and preserves the paint surface in a single process. The waxes, silicones and polishing pigments in Wax & Polish guarantee the optimum cleaning of coloured and metallic paintwork as well as providing the optimum sheen with lasting effect.

- Protects against aggressive environmental influences
- Radiant high gloss
- Suitable for machine polishing
- Excellent long-term protection

Application:

Shake Wax & Polish vigorously before use and pour onto a soft rag, polishing cloth or sponge. Apply thinly and evenly to the paint surface

using circular movements and slight pressure. Only treat one section at a time. Allow Wax and Polish to dry until it forms a matt coat. Remove this and polish using a clean, dry cloth. **Do not use under direct heat or on warm paint surfaces.**

Available Pack Sizes

LM Code	PRD NAME	SKU
7895	Polish & wax	250 ML

PAINT GLOSS CREAM



Cleans, polishes and protects. For radiant gloss through the use of carnauba wax. Offers outstanding protection against damaging environments and car wash systems.

- Evens out small hairline scratches and restores the finish gloss
- Provides the paint with deep gloss
- The original appearance of matt paintwork is easily restored
- Its creamy consistency means sparing use.
- Excellent long-term protection
- Protects against aggressive environmental influences

Application:

Clean the paint surfaces to be treated and dry them carefully. Remove Paint Polishing Cream from the can using a soft rag, polishing cloth or sponge and apply thinly and evenly using light pressure and circular movements. Only treat one section at a time. Allow Paint Polishing Creme to dry until it forms a matt coat. Then remove with LIQUI MOLY Microfiber Cloth

Available Pack Sizes

LM Code	PRD NAME	SKU
1532	Paint Gloss Cream	300 GM

CAR CARE - POLISHING

CHROME GLOSS CREAM



Bright chrome polishing cream has been specially formulated to thoroughly and gently remove rust, flash rust and blank spots from chromium parts and decorative metals. Bright chrome polishing cream preserves all chromium and decorative metal parts with a protective film and restores their original brilliance.

- Excellent corrosion protection
- Forms an adherent protective film
- Produces a very good sheen

Application:

Shake Bright Chrome Polishing Cream vigorously before use then apply to the part to be cleaned or polished using a cloth or pad and rub in lightly. Allow Bright Chrome Polishing Cream to dry

slightly and polish off using a cloth or pad. Regular application will give the optimum results for chrome.

Available Pack Sizes

LM Code	PRD NAME	SKU
7880	Chrome Gloss Cream	250 ML

GRINDING PASTE



For effortlessly removing weathered and tarnished paint layers, course dirt, paint-spray mist, scratches and surface cracks. The areas treated with grinding paste can be painted without any additional treatment.

- Suitable for polishing machines
- Easy removal of weathered paint layers
- Simple to use
- Very high standard of quality

Application:

Clean surfaces to be treated. Rub Grinding and Polishing Paste into small areas using a cloth or sponge and exerting pressure until the oxidised layers, dirt or scratches have been removed.

Available Pack Sizes

LM Code	PRD NAME	SKU
1556	Grinding Paste	300 GM

SERVICE PRODUCT

ENGINE SEALANT



Engine Sealant is a special synthetic-resin-based preservative and anti-corrosion product with rust inhibiting properties. Components and cables from the electrical system, electronics and ignition system are protected by the water-repellent sealant.

- Water repellent, non-sticky protective film
- Improves appearance
- Excellent corrosion protection
- Broad operating temperature range
- Free of chlorinated hydrocarbons compatible with metal, rubber and plastic components

Application:

Shake can well before use and hold can upright during use. Thoroughly clean the parts to be treated with LIQUI MOLY Engine Compartment Cleaner or LIQUI MOLY Universal Cleaner and let dry. Spray engine sealant evenly onto parts to be treated.

Available Pack Sizes

LM Code	PRD NAME	SKU
3327	Engine Sealant	400 ML

METALLIC HIGH GLOSS



Due to its special composition, Metallic High Gloss Polish evens out light scratches and freshens up the paint surface in a single process and the high gloss is easily restored to mildly weathered and matt paintwork. Metallic High Gloss Polish repels rain and dirt over long periods and increases the paint's resistance to damaging environments.

- Radiant high gloss
- Super-easy to polish protects against aggressive environmental influences
- Excellent long-term protection
- Suitable for machine polishing

Application:

First, thoroughly clean the surfaces to be polished and dry them carefully. Shake Metallic High Gloss Polish vigorously before use and pour onto a soft rag, polishing cloth or sponge. Apply thinly and evenly to the paint surface using light pressure and circular movements. Only treat one section at a time. Allow Metallic High Gloss Polish to dry until it forms a matt coat.

Available Pack Sizes

LM Code	PRD NAME	SKU
1424	Metallic High Gloss	500 ML

GLOSS SPRAY WAX



Wax with good cleaning action and outstanding luster. Slight road dirt and greasy soiling are easily and quickly removed without causing scratching.

- Super-easy to polish
- High gloss mirror finish protects against aggressive environmental influences
- Removes greasy contaminants and light road dirt
- Excellent long-term protection
- Freshens up colors

Application:

Quick and easy use minimizes effort. Surfaces which are heavily contaminated must be thoroughly cleaned and dried before treatment. Shake Gloss Spray Wax vigorously before use. Apply Gloss Spray Wax to the paintwork thinly and uniformly using a trigger spray bottle or LIQUI MOLY Pump Spray Bottle

Available Pack Sizes

LM Code	PRD NAME	SKU
1647	Gloss Spray Wax	400 ML

ELECTRONIC SPRAY



Makes the car electrical system reliable. Reduces wear. Suppresses moisture. Neutral to paints, plastics and rubber. Cleans and protects from corrosion. Good lubricating properties. Full synthetic.

- Cleans contaminated contacts
- Good water separation
- Good corrosion protection
- Penetrates layers of oxides and sulphides
- Repels moisture
- Reduces contact resistance

Application:

Spray components with Electronic Spray before installing them. If the contacts are heavily corroded, allow the product to act for longer and rub off corrosion residues with a cloth or brush.

Available Pack Sizes

LM Code	PRD NAME	SKU
3110	Electronic Spray	200 ML

SERVICE PRODUCT

COPPER PASTE



Copper Paste is used for the highest temperatures in threaded connections and contact surfaces that are exposed to high pressures and corrosive influences such as compressor and turbine screws, exhaust bolts, sparkplug threads.

- Resistant to acceleration forces
- Prevents transmission of vibration
- Long-term corrosion protection
- High bond strength
- Outstanding thermal stability
- Protects from welding and seizing

Application:

Apply to cleaned surfaces using a paint brush, brush or lint-free cloth. Apply the amount which is appropriate for the application.

Available Pack Sizes

LM Code	PRD NAME	SKU
3080	Copper paste	100 GM

SILICONE SPRAY



Silicone Spray is a mineral-oil free, grease-free release agent, lubricant and protective coating based on silicones dissolved in chlorine-free solvents. Silicone Spray protects, lubricates and insulates all surfaces by means of a transparent, permanent protective film.

- Eliminates unwanted noise
- Pleasant odor outstanding release agent during inert gas shielded arc welding
- Protects and cares for all plastics
- Clean application
- Insulates

Application:

Spray a thin and even coating onto the components to be treated and repeat the treatment if necessary. Do not work in the vicinity of painted areas.

Available Pack Sizes

LM Code	PRD NAME	SKU
3310	Silicon Spray	300 ML

PRO-LINE INJECTOR AND GLOW PLUG GREASE



Partly synthetic, metal-free special grease for lubricating injectors and glow plugs before installation in the engine. Blocks the ingress of moisture and so prevents corrosion of the injector and glow plug. The special grease also makes disassembly much easier.

- Prevents seizing and cold welding
- Especially resistant to cold and hot water
- Excellent corrosion protection
- Highest load-carrying capacity
- Does not attack common sealing materials

Application:

Before being treated with the special grease, all components must be clean and free of residues, dirt and moisture. Apply to the cleaned surfaces using a paint brush, brush or lint-free cloth. Apply the amount which is appropriate for the application.

Available Pack Sizes

LM Code	PRD NAME	SKU
3381	Pro Line Glow Plug Paste	20 GM

SILICONE GREASE TRANSPARENT



Wide-band lubricant for low and high temperatures with outstanding separation and lubrication properties. High resistance to oxidation, low tendency to evaporate. It is resistant to both cold and hot water, resistant to aging and temperature stable, it seals out contamination and can be delivered by centralized lubrication systems.

- High lubrication reliability –
- For separate and mixture lubrication –
- Outstanding resistance to oxidation –
- Dirt repellent
- Good water resistance

Application:

Plain and roller bearings with low bearing pressures. Separating agent and lubricant for metal/plastic pairings.

Available Pack Sizes

LM Code	PRD NAME	SKU
3112	Silicon Grease Transparent	100 ML

ZINC ALUMINUM SPRAY



Very good corrosion protection through a high zinc and aluminum content. Can be used as weather resistant, sole corrosion protection. Fast drying. Service temperature up to +250 °C. For all ferrous and non-ferrous metals. Very good electrical conductivity. Can be painted over.

- Outstanding corrosion protection
- Smooth, pore-free film
- Outstanding thermal stability
- Electrically conductive

Application:

Shake can vigorously for at least 1 minute before use. Spray onto clean, dry, degreased metallic surfaces. Can be painted over after 8 hours. Layer thickness of the zinc film dry after a single spraying

Available Pack Sizes

LM Code	PRD NAME	SKU
1640	Zinc Aluminum Spray	400 ML

PRO-LINE INJECTOR AND GLOW PLUG DISMANTLING AID



Heavy-duty solvent for seized injectors, glow and spark plugs. Undermines accumulated dirt and corrosion and enables easy removal. Outstanding cleaning properties allow stubborn oil residues, resinification and encrusted dirt to be removed easily.

- Releases seized up and rusted on parts
- Problem-free disassembly possible
- Easily dissolves stubborn dirt
- Dissolves rust

Application:

Shake can vigorously before use. Thoroughly spray the carbon deposits to be removed and allow to take effect for 15-30 minutes. Then remove accumulated dirt and disassemble injectors, glow or spark plugs. With heavy dirt, allow the solvent to work overnight

Available Pack Sizes

LM Code	PRD NAME	SKU
3379	Pro Line Injector Remover	400 ML

SERVICE PRODUCT

UNDERBODY STONEGUARD



Stoneguard black is a solvent-based, viscous coating compound based on synthetic resins for spraying and has outstanding hiding power. Special features of the material are that it is quick drying and can be painted over. After it is completely dry, the coating is resistant to abrasion, protects against corrosion and has excellent stoneguard and anti-drumming properties

- Can be painted over wet-in-wet
- PVC compatible - resistant to solvents (when fully dry)
- Good covering power
- Extremely high UV resistance
- After drying, very easy to grind

Application:

Stoneguard black is used on visible parts of the vehicle such as the sills, spoiler, rear and front facing panels and for chassis and body work components and plastic repairs as a protection against stone impact and corrosion from de-icing salt and moisture. Stoneguard black is not suitable for coating elastic materials.

Available Pack Sizes

LM Code	PRD NAME	SKU
6110	Underbody Stoneguard	1 L

LM 40 MULTI-PURPOSE-SPRAY



Lubricates, cleans, loosens, protects and maintains. Keeps movable parts permanently free. The enormous creep properties lets LM 40 reach even the most hidden lubrication points.

- Loosens: Stubborn, rusted-in and permanently stuck screws in no time
- Cleans: Hidden dirt and stubborn oil and grease remnants.
- Protects: Against rust and corrosion and maintains chrome parts.

Application:

Spray the place to be treated with LM 40 Multi-Purpose Spray and leave it to take effect.

Available Pack Sizes

LM Code	PRD NAME	SKU
3391	Multi-purpose Spray	400 ML

RUST SOLVENT XXL



Rust Solvent XXL contains a selection of agents with excellent rust-dissolving, water repellent, protective and penetrating properties.

- Outstanding resistance to salt water
- Dissolves rust
- Does not attack plastics, paints and metals
- Releases dirt
- Good corrosion protection

Application:

Spray onto surface with the aerosol, air spray can, spray gun or apply by immersion, brush or wiping.

Available Pack Sizes

LM Code	PRD NAME	SKU
1811	Rust Solvent	600 ML

UNDERSEAL BITUMEN, BLACK



Corrosions protection agent that forms a toughened, sealed, protective film when dry. The bituminous coating material has good anti-drumming action and high abrasion resistance. High amount of solids content. Cannot be painted over.

- High abrasion resistance
- Stone guard
- For protecting the underneath of the vehicle for covering flaked paint in wheelhouses after accident repairs
- Outstanding rigidity

Application:

The surfaces which have to be treated with Underseal must be thoroughly cleaned beforehand. Rust must be removed. The surfaces must be dry and free of wax, dirt and grease and extensively free of dust.

Available Pack Sizes

LM Code	PRD NAME	SKU
6112	Underbody Bitumen	750 ML

MULTI-SPRAY PLUS 7



Multi-function spray for all automotive, house hold, hobby and garden applications with 7 performance benefits.

- Suppresses moisture and starts wet motors
- Protects the electrical system
- Eliminates creep currents and short circuits
- Keeps movable parts permanently free
- Protects against corrosion and oxidation
- Maintains rubber parts; no freezing-on
- Prevents squeaking noises. Neutral to plastics, paints, metals and wood.

Application:

Spray onto surface with the aerosol or air spray can or spray gun or apply by immersion, brush or wiping.

Available Pack Sizes

LM Code	PRD NAME	SKU
3304	Multi Purpose Spray 7	300 ML
3305	Multi Purpose Spray 7	500 ML

BRAKE ANTI-SQUEAL PASTE



Brake Anti-Squeal Paste has been specially developed from synthetic and ceramic materials which eliminate brake squeals arising between the brake piston or contact surface and the brake lining.

- Extremely adherent, resistant to road salt and splash water
- Secures the function of the entire brake system
- Prevents and eliminates squealing sounds from brakes

Application:

With floating brake callipers, first clean all sliding surfaces, channels and contact surfaces using a brush or brake file. Next, clean the brake components with Rapid Cleaner (Part no. 3318). After the solvent has evaporated, coat cleaned parts with Brake Anti-Squeal Paste on all sliding surfaces, channels and contact surfaces.

Available Pack Sizes

LM Code	PRD NAME	SKU
3074	Brake Anti-Squeal Paste	200 ML

SERVICE PRODUCT

BRAKE ANTI-SQUEAL PASTE



Brake anti-squeal paste has been specially developed from synthetic and ceramic materials which eliminate brake squeals arising between the brake piston or contact surface and the brake lining.

- Prevents and eliminates squealing sounds from brakes
- Secures the function of the entire brake system
- Prevents the seizing or rust freezing of the rims on the wheel hubs

Application:

With floating brake callipers, first clean all sliding surfaces, channels and contact surfaces using a brush or brake file. Next, clean the brake components with Rapid Cleaner (Part no. 3318). After the solvent has evaporated, coat cleaned parts with Brake Anti-Squeal Paste on all sliding surfaces, channels and contact surfaces.

Available Pack Sizes

LM Code	PRD NAME	SKU
3078	Anti Squeal Paste	10 GM

TACKY LUBE-SPRAY



Tacky Lube-Spray is a synthetic high-quality, heatresistant, extremely adherent and acceleration-resistant lubricant compound. After the solvent has evaporated, the product leaves an extremely adherent, soft film of grease.

- Good corrosion protection
- Resistant against hot and cold water
- With long-term effect
- Good creeping properties.

Application:

Spray an appropriate amount of Tacky Lube Spray onto the cleaned parts to be treated.

Available Pack Sizes

LM Code	PRD NAME	SKU
2518	Tacky Lube Spray	400 ML

PRO-LINE DIESEL PARTICULATE FILTER CLEANER



Highly effective fluid for cleaning clogged passenger car diesel particulate filters when installed. Dissolves hardened, dense and encrusted contaminants on the surface of diesel particulate filters.

- Secures optimum vehicle handling, engine performance and low fuel consumption
- Regular cleaning in combination with flushing can help avoid expensive repair costs

Application:

Cleaning is performed with the DPF Pressure Cup Spray Gun (part no. 7946) and the specially developed DPF Gun with 5 spray probes (part no. 7945). Depending on the type of vehicle, access to the diesel particulate filter is to be established. On most vehicles, the temperature or pressure sensor of the diesel particulate filter must be removed for this.

Available Pack Sizes

LM Code	PRD NAME	SKU
5169	DPF Cleaner	1L

V-BELT SPRAY



V-Belt Spray is a special combination of agents formulated for maintaining and increasing the efficiency and performance of V-belt drives.

- Eliminates v-belt slipping and squeaking
- Makes them supple and extends the service life
- Spares belts and discs from wear
- Increases the traction effectiveness
- Maintains and protects.

Application:

Spray side surfaces of V-belts from approx. 20 cm. Repeat if a thicker coating is required. Wait approx. 10 minutes to allow the product to take effect before starting the belt drive.

Available Pack Sizes

LM Code	PRD NAME	SKU
4085	V-belt Spray	400 ML

RAPID CLEANER (SPRAY)



Makes assembly work easier, cleaner and safer. Removes oil, grease and dirt quickly and completely.

- Parts treated will be completely free of residues and fully degreased
- Saves time and money and guarantees trouble-free repair work
- Removes resin, oil and grease residues
- Excellent penetration, controlled evaporation, free of residues.

Application:

Spray contaminated components and allow to drain. After the solvent has evaporated, the components will be clean and free from grease

Available Pack Sizes

LM Code	PRD NAME	SKU
3318	Rapid Cleaner	500 ML

PRO-LINE DIESEL PARTICULATE FILTER PURGE



Highly effective fluid for flushing passenger car diesel particulate filters (DPF/FAP) after cleaning with Pro-Line Diesel Particulate Filter Cleaner when installed.

- Secures optimum vehicle handling, engine performance and low fuel consumption
- The layer of soot is softened by the cleaner, and the soot is dissolved and distributed in the diesel particulate filter so that it can be burned off with normal regeneration

Application:

Cleaning is made with the compressed air gun for DPF (item no. 7946) and the specially developed DPF Probe with 5 interchangeable tips (part no. 7945). The diesel particle filter

must be accessed depending on the vehicle type. In order to do this, the temperature or pressure sensor on the diesel particle filter must be removed on most vehicles.

Available Pack Sizes

LM Code	PRD NAME	SKU
5171	DPF Purge	500 ML

SERVICE PRODUCT

PRO-LINE THROTTLE VALVE CLEANER



Special active solvent for cleaning typical dirt and deposits in the intake and throttle valve area. Loosens and removes all dirty deposits and dirt such as oil, resin, glue, etc. It guarantees the functional performance of the moving parts and reduces fuel consumption. Increases the reliability of gasoline-powered engines.

- Excellent cleaning effect
- Simple to use
- Cleaning possible without dismantling
- Optimizes economical use
- Rapid cleaning

Application:

Create access to the intake pipe. Introduce Throttle Valve Cleaner to the intake area

downstream of the air flow meter. Turn the engine off, thoroughly spray the parts to be cleaned and allow the agent to take effect for 2-3 minutes. Then restart the engine and generously spray the complete area again with the engine running at moderate speed (2,000-3,000 rpm).

Available Pack Sizes

LM Code	PRD NAME	SKU
5111	Throttle Valve Cleaner	400 ML

PRO-LINE JETCLEAN DIESEL INJECTION CLEANER



Pro-line jet clean diesel system cleaner contains a highly effective cleaning combination of additives formulated for rapid and cost-effective cleaning of disruptive deposits in the fuel systems of diesel engines.

- Good corrosion protection
- Cleans the fuel system
- Reduces pollutant emissions
- Improved ignition
- Rapid and simple problem-solving
- Eliminates diesel knocking

Application:

To clean, fill the JetClean unit with 2 - 3 liters of undiluted Pro-Line JetClean Diesel System Cleaner

Available Pack Sizes

LM Code	PRD NAME	SKU
5155	Engine Decarboniser	5 L

AIR FLOW SENSOR CLEANER



Special active solvent for fast and gentle cleaning of sensitive components of the air flow sensor in gasoline and diesel engines. The Cleaner also distinguishes itself by means of a very fast evaporation that is free of residues.

- Simple to use
- Fast evaporation free of residues
- Excellent cleaning effect
- Economical

Application:

Disconnect electrical connection of the air flow sensor and remove the sensor. Spray generously onto dirty components such as the hot wire or hot plate and allow the dirt to drip off. Do not touch the sensitive components of the sensor.

Allow the solvent to dry completely before installation. Application is recommended every time the air filter is replaced or when problems arise.

Available Pack Sizes

LM Code	PRD NAME	SKU
4066	Air Flow Sensor Cleaner	200 ML

PRO-LINE INTAKE SYSTEM CLEANER DIESEL



Special active solvent with a high-tech additive combination for removing typical contamination and deposits in the intake and throttle valve area.

- Loosens and removes greasy deposits and dirt such as oil, soot, etc
- It guarantees the functional performance of the moving parts and reduces fuel consumption
- Increases the reliability of diesel-powered engines.

Application:

Create access to the EGR valve. Introduce Intake System Cleaner to the intake area downstream of the air flow meter. Remove contamination by means of a spray jet. Thanks to the long spray probe, the entire intake duct can be cleaned.

Start engine and clean the intake tract at short spray intervals (2-3 sec.) with the engine running at approx. 2,500 rpm. If the speed increases (> 1,000 rpm) during application, stop spraying immediately.

Available Pack Sizes

LM Code	PRD NAME	SKU
5168	Intake System Cleaner Diesel	400 ML

PRO-LINE JETCLEAN FUEL SYSTEM CLEANER



Ready-to-use highly effective combination of additives for cleaning all gasoline injection systems such as K, KE, I-jetronic and similar systems. The product has been developed and formulated for use in jetclean units.

- Cleans the injection system
- Reduces deposits
- Guarantees low fuel consumption
- Removes carbon deposits from the intake valves and in the combustion chamber
- Reduces pollutant emissions

Application:

Ready to use
Fill the Jet-Clean unit with Intensive Fuel System Cleaner undiluted. Further instructions on use are given in detail in the instructions for the Jet-Clean unit.

Available Pack Sizes

LM Code	PRD NAME	SKU
5151	Engine Decarboniser	5 L

UNIVERSAL CLEANER



Liqui Moly Universal Cleaner is a concentrated degreaser and industrial cleaner which can be dissolved in water

- Does not contain flammable solvents
- Multifunctional uses
- Concentrate can be diluted with water
- Economical to use

Application:

Liqui Moly Universal Cleaner can be applied by spraying or immersion or wiping with brushes, cloths or sponges.

Available Pack Sizes

LM Code	PRD NAME	SKU
1653	Universal Cleaner	1 L

SERVICE PRODUCT - AIR CONDITIONING

AIR-CONDITIONER CLEANING SET



Spray gun with flexible probe that produces a ball-shaped directed spray. The approx. 1.2 liter (0.32 gal) tank is connected to the gun via a quick connector located on the tube and thus enables ideal handling when cleaning.

- Simple to use
- Long and flexible spray probe
- Assures optimum spray diffusion
- Cleans air inlet ducts

Application:
Please follow the procedure for cleaning as described on the Internet under www.liqui-moly.com!

Available Pack Sizes

LM Code	PRD NAME	SKU
4090	A/C System Cleaner Gun	1 Unit

A/C SYSTEM CLEANER (SPRAY)



Special cleaner for removing mold and bacteria simply and effectively from A/C systems without dismantling.

- Destroys molds and bacteria
- Cleans air inlet ducts
- Leaves behind a pleasantly fresh fragrance after cleaning

Application:
pray the cleaning fluid directly on the surface of the evaporator (if possible) for commercial vehicle, bus and home A/C systems.

Available Pack Sizes

LM Code	PRD NAME	SKU
4087	A/C System Cleaner	250 ML

A/C SYSTEM CLEANER



Cleaning fluid for removing mold and bacteria (e.g. legionella) simply and effectively from A/C systems in passenger cars, commercial vehicles, buses and in the home without dismantling.

- Destroys molds and bacteria
- Cleans air inlet ducts
- Removes musty smells
- Assures fresh, clean air
- Forms a protective film

Application:
spray the cleaning fluid directly onto the surface of the evaporator of commercial vehicle, bus and home A/C systems.

Available Pack Sizes

LM Code	PRD NAME	SKU
4092	A/C System Cleaner	S/L

KLIMA FRESH



Within a short time (approx. 10 min.) Removes the unpleasant odors that are caused by bacteria and mold in air conditioning systems, ventilation ducts or vehicle interiors. Easy to use - no need to disassembly the pollen or dust filter. Leaves a pleasant, fresh aroma behind.

- Assures fresh, clean air
- Removes musty smells
- Increases ride comfort

Application:
Before applying the product the surface of the evaporator should be dried by using the vehicle heating system. Shake the can well before use. Adjust air distributor switch to fresh air nozzle middle (passengers) and top (front window)

Position it in the intake area of the air recirculation system (mostly front passenger legroom) by means of the covering box. Then, activate the spray head until it snaps into place

Available Pack Sizes

LM Code	PRD NAME	SKU
4065	Klima Fresh	150 ML

AIR-CONDITIONING ULTRASONIC



Quickly and easily (approx. 20 minutes) removes microbes, mold and bacteria (e.g. Legionellae) from passenger car, commercial vehicle and bus air conditioning systems as well as the entire ventilation system.

- Unpleasant odors in the vehicle interior are eliminated, with a citrus smell signaling fresh, clear air
- Destroys microbes, molds and bacteria
- Simple to use

Application:
The cleaning fluid can be used together with all common, commercially available ultrasonic air conditioning cleaning units. Turn screw bottle with sealed cover into the cleaning unit or add


the cleaning fluid to the cleaning unit's tank. Contents are sufficient for one cleaning. Observe the specifications of the unit's manufacturer during use.

Available Pack Sizes

LM Code	PRD NAME	SKU
4079	A/C Ultrasonic	100 ML

SERVICE EQUIPMENTS

DPF-PROBE WITH 5 INTERCHANGEABLE TIPS



Specially developed probe with 5 different moving tips made from stainless steel for processing Pro-Line Diesel Particulate Filter Cleaner and Pro-Line Diesel Particulate Filter Purge. The probe has a flexible hose connection with a length of 1 m and push-on nipples that fit the DPF pressurized tank spray gun (part no. 7946).

Available Pack Sizes

LM Code	PRD NAME	SKU
7945	DPF Spray Nozzles	1 Unit

DPF PRESSURIZED TANK SPRAY GUN



Powder-coated aluminum tank with commercially available compressed air connection and non-return valve. Filling capacity 1 liter. By means of a control valve, the amount of liquid applied can be manually adjusted. The air fed into the spray stream atomizes the liquid very finely.

Available Pack Sizes

LM Code	PRD NAME	SKU
7946	DPF Spray Gun	1 Unit

LAMINATED GLASS REPAIR SYSTEM CASE



Professional repair system for repairing laminated glass.


- The tool case contains all tools that are required for a professional laminated glass repair in the automotive sector
- The individual tools are of a high quality and are extremely stable.
- The simple design of the system guarantees a safe and easy operation
- Even stone cracks with fragmentation on the surface or a heavily soiled impact point can be repaired with this system

Application:
Handling for the repair is provided in the detailed operating instructions included in the case.

Available Pack Sizes

LM Code	PRD NAME	SKU
6261	Glass Repair Kit	1 Unit

JETCLEAN COMPRESSED AIR CONNECTOR (JETCLEAN PLUS)



Specially developed cleaning device for the rapid and simple elimination of problems due to dirt in the mixture preparation system at intake valves and in the combustion chamber of gasoline and diesel injection systems. Problems can be eliminated within 30 - 45 minutes in combination with the Pro-Line JetClean cleaning fluid developed for this purpose

- cleans the mixture preparation system as well as the intake valves and the combustion chamber
- for cleaning gasoline and diesel injection systems
- rapid cleaning
- operated without need for electricity or compressed air

Available Pack Sizes

LM Code	PRD NAME	SKU
5118	Jet Clean Plus	1 Unit

JETCLEAN COMPRESSED AIR CONNECTOR (JETCLEAN PLUS)



Eases cleaning petrol and diesel injection systems with JetClean Plus. Facilitates uniform system pressure without having to re-pump. Length: 2 m.

WASTE OIL COLLECTION AND SUCTION DEVICE



With pressurized draining and vacuum extraction, 70 liters

- 1.60 m dispensing hose with discharge bend
- Height-adjustable collecting funnel with removable sieve
- Maximum height 1,800 mm
- Sensor holder, complete with 5 suction sensors
- Adapter for BMW, Mercedes-Benz, V.A.G., PSA-Group

Application:
Handling for the repair is provided in the detailed operating instructions included in the case.

Available Pack Sizes

LM Code	PRD NAME	SKU
7828	Waste Oil Collection Suction	1 Unit

Available Pack Sizes

LM Code	PRD NAME	SKU
5112	Jet Clean Compressed Air Connector	1 Unit

SERVICE EQUIPMENTS

OIL DRIP PAN



For 2 drums up to 205 liters With wastewater type approval. Length: 1340 mm Width: 860 mm Height: 340 mm Weight: 76 kg

Available Pack Sizes

LM Code	PRD NAME	SKU
7812	Oil Drip Pan	1 Unit

PUMP SPRAY BOTTLE



Our Pump Spray Bottle is a spray bottle with a hand pump and has universal application. It can be used for numerous chemical products such as Rapid Cleaner, Rust Solvent, Multi Spray and Universal Cleaner.

Application:

Fill the Pump Spray Bottle with the chemicals for which it is designed. Do not exceed the maximum capacity of 1 litre. Pressurise the bottle by working the pump up and down and adjust to the desired spray pattern by rotating the nozzle. Clean the bottle and the pump when switching over to a different fluid.

Available Pack Sizes

LM Code	PRD NAME	SKU
3316	Pump Spray Bottle	1 Unit

PLASTIC MEASURING CUP



2 liter capacity, not calibrated.

Available Pack Sizes

LM Code	PRD NAME	SKU
7805	Plastic Measuring Cup	1 Unit

OIL CHANGE CANISTER




Capacity of 10 liters

- Separate venting screw
- Suitable for passenger cars and motorcycles

Available Pack Sizes

LM Code	PRD NAME	SKU
7055	Oil Change Canister	1 Unit

DRUM PACKET A1



Hand pump Consisting of: • Professional hand pump with telescopic intake pipe for 60 to 205 liters

Available Pack Sizes

LM Code	PRD NAME	SKU
7996	Drum Packet A1	1 Unit

SPRAY GUN



He LIQUI MOLY structure gun is suitable for processing 1 liter of underbody and stoneguard protection products and can be used on spots where it is important to restore the original structure. The adjustable spray jet lets you produce various finish structures.


Application:

Different surface structures can be produced with the adjustable spray nozzle. The spray gun fits onto 1 liter cans.

Available Pack Sizes

LM Code	PRD NAME	SKU
6219	Spray Gun	1 Unit

Discover Germany's No.1 Motor Oil Brand*



LIQUI MOLY was recently voted by four independent surveys as the best in Germany. We specialise in advanced factory approved lubricants.

Make sure that you use the right motor oil with proper specifications to ensure engine reliability, maintenance of value and accordance with OEM warranty guidelines.

Modern advanced engines demand specialised oils to achieve extended service intervals, to maintain good fuel economy, and to meet latest emission standards.

Isn't it time YOU discover LIQUI MOLY?

ANSYSCO ANAND LLP
Plot No. 19-F, Sec-2,
Industrial Area, Parwanoo
Distt. Solan (H.P.), 173220
Customer Care Executive : Ph 01792-657230,
657002, 657004

www.anandgroupindia.com

The Troubleshooter

* 6 years in a row



7 years in a row



6 years in a row



7 years in a row

