

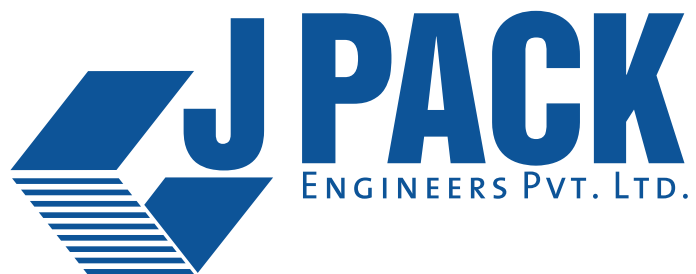





MAKING PACKAGING **SIMPLE & STRONG**

PACKAGING MACHINES - PACKAGING SYSTEMS - INTEGRATED SYSTEMS



Leading Manufacturer of Quality Packaging Machines

www.jpacengineers.com

STRAPPING
MACHINES



JS-1 IMC
SEMI AUTOMATIC BOX STRAPPING MACHINE

Dimension	895mm (L) x 565mm (W) x 740mm (H)
Weight	90 Kg.
Min. Package Size	100mm (W) x 30mm (H)
Machine Tension	5-55 Kg.
Strap Width	5-15 mm.
Strapping Speed	1.5 Sec / Strap
Clutch Break	Catt make Japan
Power Consumption	0.5 Kw
Power Supply	100, 110, 220, 230, 240 V 50/60 Hz 1φ

- Housing Invst. Casting | PCB for Long Lasting Operation

JS-1 IMBL
SEMI AUTOMATIC BELTLESS STRAPPING MACHINE

Dimension	895mm (L) x 565mm (W) x 740mm (H)
Weight	60 Kg.
Min. Package Size	100mm (W) x 30mm (H)
Machine Tension	5-55 Kg.
Strap Width	5-15 mm
Strapping Speed	1.8 Sec / Strap
	Works with Dual Motor
Power Consumption	92 W
Power Supply	100, 110, 220, 230, 240 V 50/60 Hz 1φ



TP - 102
AUTOMATIC BOX STRAPPING MACHINE

Dimension	1600mm (L) x 700mm (W) x 1600mm (H)
Arch Size	850 x 600 H/mm
Weight	220 Kg.
Max. Tension	80 Kgs.
Package Size	Max - 750mm (W) x 480mm (H)
	Min - 100mm (W) x 30mm (H)
Strap Size	9, 12, 15mm (any one with Machine)
Strap Joint	Heat Sealed
Strapping Speed	2 Sec / Strap (in standard Arch Size)
Strap Coil Size	0-200mm (optional)
Driving Motor	3 Motors 1/2 HP, 1/3 HP
Power Consumption	1 Kw
Power Supply	3φ 415V 50 Hz

JS - 1 FPR
FULLY AUTOMATIC POWER ROLLER
BOX STRAPPING MACHINE

Dimension	1750mm (L) x 700mm (W) x 1600mm (H)
Arch Size	800mm(W) x 600mm(H)
Weight	260 Kg.
Machine Tension	80 Kg.
Package Size	Max - 650mm (W) x 550mm (H)
	Min - 250mm (W) x 100mm (H) x 250mm (L)
Strap Width	9,12, 15mm (any one with machine)
Strapping Speed	2 Sec / Cycle
Power Roller Speed	19 Mts. / Min.
PLC Control	Mitsubishi
Sensors	P & F, Germany
Power Consumption	1.2 KW
Power Supply	415 - 440 V AC, 3 Phase, 50 Hz



STRAPPING
MACHINES



JS-1 FPRV

VERTICALLY FULLY AUTOMATIC POWER ROLLER STRAPPING MACHINE

Dimensions	1410mm (W) x 640mm (D) X 1810mm (H)
Arch Size	1050mm (W) x 750mm (H)
Weight	287 Kgs.
Table Height	Max. 70 Kgs. 585-685mm
Tension Strength	25 Straps / 60 Sec. in Standard Arch Size
Packing Size	600mm (W) x 530-630mm (H)
Strap Size	12mm or 15mm along with Machine
Strap Thickness	0.7 mm
Strap Cycle Speed	P&F make
Sealing Method	Heat Sealing
PLC Control Sensor	Siemens
Power Supply	110/220 V 50/60 Hz 1 Ph 220/380 V 50/60 Hz 3 Ph



LOW TABLE MODEL



TP - 102 P


AUTOMATIC STRAPPING MACHINE
WITH PRESSING

Arch Size	800mm x 550mm
Table Height	750mm
Strap Size	12mm
Package Size	Max - 700mm(W) x 500mm(H) Min - 150mm(W) x 150mm(H)
Table	Steel Plate 12mm (Thickness)
Speed	4 Sec. / Min. A Cycle
Control	PLC Control + Magnet
Body Frame	Channel size 100mm x 50mm
Air Pressure	6 Kg/cm 2 ~ 8 Kg / cm2 (Air Compressor Required - Client's Scope)
Air Cylinder	160 x 700 Stock
Air Consumption	70 Ltr. / Cycle
Control Motor	0.4 KW 3 Phase 220 V
Feeding Motor	0.2 KW 3 Phase 220 V
Pool Motor	0.4 KW 3 Phase 220 V
Power Supply	380 V 3 Phase 50 Hz

TP - 102 LT

AUTOMATIC BOX STRAPPING MACHINE WITH LOW TABLE

Dimension	2280mm (W) x 600mm (D) x 1800mm (H)
Arch Size	800 x 600 H/mm
Weight	375 Kg.
Table Height	450mm
Package Size	Max - 750mm(W) x 550mm(H) Min - 250mm(W) x 100mm(H)
Tension	5~70 Kg.
Strap Size	12mm
Speed	3 Sec / min A cycle
Control PLC	Siemens
Switch Geared	Schneider
Power Supply	380 V 50 Hz

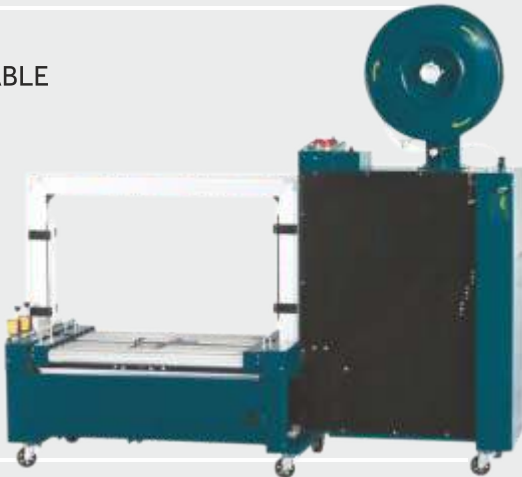

STRAPPING
MACHINES



TP - 102 BT
AUTOMATIC STRAPPING MACHINE
WITH BALL TOP TABLE

Arch Size	850mm x 600mm (H)
Top Table	Ball Top Type
Package Size	Max - 780mm (W) x 500mm (H)
	Min - 100mm (W) x 50mm (H)
Max Tension	80 Kgs.
Strap Size	12mm
Strap Joint	Heat Sealed
Strapping Speed	2 Sec / Strap (Standard Arch Size)
Strap Coil Size	0-200 mm, 0-200mm (optional)
Control	Relay & Timer Base
Driving Motor	3 Motors, 1/2 HP, 1/3 HP
Power Consumption	1 Kw
Power Supply	3φ 415 V 50 Hz



JS - 1 FPRB
FULLY AUTOMATIC BOX STRAPPING MACHINE
(HIGH SPEED)

Dimension	1480mm (L) x 730mm (W) x 1408 mm (H)
Arch Size	850mm x 600mm (H)
Weight	280 Kg.
Package Size	Min - 80mm (W) x 60mm (H)
	Max - within the arch size
Tension	0 - 45 Kg
Workable Height	850mm
Strap Size	12mm
Strap Joint	Heat Sealed
Packing Speed	<_ 40 Strap / Min.
Power Consumption	1.02 KW, 6A
Power Supply	380 V 3 Phase 50 Hz



JS - 1 FPRC
FULLY AUTOMATIC BOX STRAPPING MACHINE
WITH PRESSING (FOR CORRUGATED BUNDLE)

Arch Size	1250mm (W) x 500mm (H)
Weight	350 Kg.
Table Height	760mm - 1040mm (adjustable)
Package Size	Max - Within the Arch Size
	Min - 80mm (W) x 60mm (H)
Packing Speed	12 - 13 Bundles / Min. with Press
Conveyor Speed	9 - 51 Mtr. / Min
Reel Inside Diameter	200mm 230mm 280mm
Strap Width	5 / 6 mm
Strap Joint	Heat Sealed
Optionals	#304 Stainless Steel Housing
	Light Buzzer
Power Supply	220 / 230 V 50 / 60 Hz 1 Phase



STRAPPING
MACHINES



SQ - 800
AUTOMATIC STRAPPING MACHINE

Dimension	1252mm (W) x 1403mm (H) x 609mm (D)
Arch Size	850mm (W) x 600mm (H)
Weight	220 Kg.
Table Height	Max. - 620mm (W) x 480mm (H)
Package Size	Min. - 80mm (W) x 30mm (H)
Joint Strap Coil	Heat Seal / Polypropylene ID 200 x OD 450 x W 200mm
Strap Width	5, 6, 9, 12, 15.5 mm
Power Supply	100, 120, 200, 220, 230, 240 V 1 Phase
	50/60 Hz 0.9 KVA



RQ - 8A
FULLY AUTOMATIC STRAPPING MACHINE - BELT DRIVEN

Dimension	1252mm (W) x 1403mm (H) x 611mm (D)
Weight	230 Kg.
Arch Size	650mm (W) x 500mm (H)
Conveyor Height	798mm
Package Size	Max - 550mm (W) x 430mm (H)
Joint / Strap / Coil	Min - 170mm (W) x 100mm (H) x 230mm (L)
	Heat Seal / Polypropylene ID 200 x OD 450 x W 200 mm
Strap Width	5, 6, 9, 12, 15.5mm
Max Strap Tension	784N (80 Kg) 150mm Stroke
Power Supply	200, 220, 240, 380, 400, 415 V
	3 Phase 50 / 60 Hz 0.85 kVA

RQ - 8Y
AUTOMATIC STRAPPING MACHINE - FOR SIDE SEAL

Dimension	1500mm (W) x 1722mm (H) x 610mm (D)
Weight	200 Kg.
Arch Size	600mm (W) x 850mm (H)
Package Size	Max - 570mm (W) x 820mm (H)
	Min - 30mm (W) x 100mm (H)
Joint Strap Coil	Heat Seal / Polypropylene ID 200 x OD 450 x W 200mm
Strap Width	5, 6, 9, 12, 15.5 mm
Strap Tension	Max 80 Kg 150mm Stroke
Speed	1.7 Sec / Strap 35 Straps / Min.
Power Supply	110, 120, 200, 220, 230, 240 V
	1 Phase 50/60 Hz 0.65 KVA





RQ - 8NI

AUTOMATIC STRAPPING MACHINE - FOR PUBLICATION

Dimension	1628mm (W) x 1830mm (H) x 631.5mm (D)
Weight	420 Kg.
Table Height	820 - 960mm
Arch Size	600mm (W) x 450mm (H)
Package Size	Max - 500mm (W) x 400mm (H) Min - 200mm (W) x 200mm (L) x 50mm (H)
Joint Strap Coil	Heat Seal / Polypropylene ID 200 or 230 x W 200mm
Strap Width	5,6 mm
Speed	1.1 Sec / Strap 54 Straps / Min.
Power Supply	200 - 240 V, 380 - 480 V 3 Phase 50 / 60 Hz 1.2 kVA



RQ - 7M

AUTOMATIC STRAPPING MACHINE
FOR SEA FOOD & MEAT PACKAGING INDUSTRY

Dimension	1580mm (W) x 1782mm (H) x 610mm (D)
Table Height	624, 642 or 664mm
Arch Size	700mm (W) x 650mm (H)
Package Size	Max - 680mm (W) x 500mm (H) Min - 30mm (W) x 80mm (H)
Joint / Strap / Coil	Heat Seal / Polypropylene ID 200 x OD 450 x W 200mm
Strap Width	5, 6, 9, 12mm
Strap Tension	Max 686N (70 Kgf) 62mm Stroke
Strapping Rate	20 Seconds (1.7 Sec.)
Power Supply	200, 220, 240, 380, 400, 415 V 3 Phase 50 / 60 Hz 0.85 kVA

STRAPPING
MACHINES



RQ - 8LS
LOW BODY STRAPPING MACHINE

Dimension	1411 + 750mm (W) x 1411mm (H) x 609mm (D)
Arch Size	850mm (W) x 600mm (H)
Table Height	432mm
Package Size	Min - 80mm (W) x 30mm (H)
Speed	1.8 Sec / Strap
Joint / Strap / Coil	Heat Seal / Polypropylene
	ID 200 X OD 450 X W 200mm
Strap Width	5, 6, 9, 12, 15.5 mm
Strap Tension	Max 784N (80 Kgf) Max 1778 lbf



OB - 360 A
AUTOMATIC STRAPPING MACHINE
- HIGH SPEED | FILM / TAPE BANDING

Dimension	570mm (W) x 488mm (H) x 282mm (D)
Table Height	237mm
Package Size	Min - 30mm (W) x 10mm (H) Max - 420mm (W) x 210mm (H)
Tape	30mm (W) x 190mm (L) 80g (Paper) 30mm (W) x 200-370mm (L) 60-110um (Film)
Strap Tension	5-30N (0.5 - 3 kgf) adujstable
Power Supply	100-120, 200-240V 1 Phase 50 / 60 Hz

TABLE TOP MODEL



CARTON SEALING MACHINES



JS - 1 IMBT TOP & BOTTOM DRIVE TYPE - CARTON SEALING MACHINE

Tape Width	48mm - 72mm
Speed	20 Cartons / Min.
Package Size	L (150-infinite x W(150-500) x H(150-500) mm
Weight Capacity	30 Kgs.
Motors	2 Nos. (1/4 HP)
Power Supply	230 V AC, 1 , 50 Hz
Power Requirement	400 Watt
Machine Dimension	1700mm (L) x 760mm (W) x 1600mm (H)
Machine Weight	145 Kg.

Length includes 0.5 Mtr. in feed and out feed conveyor)



JS - 1 IMBT (Random) RANDOM CARTON SEALING MACHINE WITH TAPPING

Tape Width	48mm - 72mm
Speed	20 Cartons / Min.
Package Size	L(150-INFINITE) x W(150-480) x H(150-500)mm
Weight Capacity	30 Kg. to 40 Kg.
Motors	2 Nos. (3/4 HP)
Power Supply	230 V AC 1 50 HZ
Air Pressure	5 Kg / Cm2 (Air Compressor Required - Client's Scope)
Machine Dimension	2000mm(L) x 1100mm (W) x 1560mm(H)
Machine Weight	200 Kg.



JS - 1 IMBSF CARTON SEALING MACHINE WITH FLAP CLOSURE

Tape Width	48mm - 72mm
Speed	20 Mt. / Min.
Package Size	L(150-700) x W(150-480) x H(150-480)mm
Weight Capacity	30 Kg. to 40 Kg.
Power Supply	230 V AC 1φ 50 Hz
Power Requirement	440 Watt
Air Pressure	6 Bar (Air Compressor Required - Client's Scope)
Machine Dimension	2600mm (L) x 1100mm (W) x 2000mm (H)
Machine Weight	285 Kg.



CARTON SEALING MACHINES



JS - 1 IMBSF A

AUTO RANDOM CARTON SEALING WITH FLAP CLOSURE

Tape Width	48mm - 72mm
Package Size	L(200-700) x W(130-500) x H(130-500)mm
Weight Capacity	30 Kg. to 40 Kg.
Power Supply	220/240 V 50 Hz 440 W Power
Air Pressure	6 Bar (Air Compressor Required - Client's Scope)
Machine Dimension	2070mm (L) x 980mm (W) x 1680mm (H)
Machine Weight	290 Kg.



JS - 1 IMBSF 3HG

HOT MELTING GLUEING WITH FLAP CLOSURE MACHINE

Range of Carton Size	200 - 600mm (L), 160 - 400mm (W), 160-450mm (H)
Power Supply	3 Ph 380 V 50 / 60 Hz 600 W
Capacity	5 to 6 Box / Min. (depending upon the speed of operator)
Machine Size	2100mm (L) x 1000mm (W) x 1470mm (H)
Gross Weight	360 Kg. (approx)
Net Weight	300 Kg. (approx)

JS - 1 IMCR

AUTO CORNER SEALER MACHINE

Type Width	48 - 72mm
Package Size	L(250-500) x W(250-500) x H(200-500)mm
Weight Capacity	30 Kg.
Packaging Speed	15 to 20 Carton / Min.
Power	230 V / AC or 110 V / AC 50 Hz
Motor	4 Sets Single Phase 220 V / 50 Hz / 200 W
Working Width	750mm
Air Pressure	4 to 6 Bar (Air Compressor Required - Client's Scope)
Machine Dimension	2000mm (L) x 1300mm (W) x 1625mm (H)
Net Weight	300 Kgs.
Gross Weight	450 Kgs.



STRETCH WRAPPING MACHINES



JSW - 01 MB

BOX STRETCH WRAPPING MACHINE

Box Size (Max.)	800mm (L) x 800mm (W) x 800mm (H)
Box Size (Min.)	260mm (L) x 260mm (W) x 280mm (H)
Turn Table	400mm
Weight Capacity	5 Kg. to 60 Kg.
Air Pressure Required	4 Kg / cm ² ~ 6 Kg / cm ² (Air Compressor Required - Client's Scope)
Power	230 V AC
Display Counter Base	
Counter 1	Show no. of Wrap to be applied on Box / Carton
Counter 2	Show no. of Box to be Packed
Machine Dimension	56inch (L) x 28inch (W) x 90inch (H)
Machine Weight	145 Kg.



JSW - 01 MH

BOX STRETCH WRAPPING MACHINE - WITH POWER PRE-STRETCH

Turn Table Diameter	400mm
Turn Table Speed	25 RPM
Machine Dimension	1250mm (L) x 850mm (W) x 2250mm (H)
Machine Weight	200 Kg.
Air Pressure	4 Kg / cm ² ~ 8 Kg / cm ² (Air Compressor Required)
Weight Capacity	5 Kg. to 60 Kg.
Product Size (Max)	1000mm(L) x 1000mm(B) x 1000mm(H)
Product Size (Min)	300mm(L) x 300mm(B) x 300mm(H)
Film Parameters	LLDPE Width of Roll - 100-500mm Thickness - 29-32 micron Diameter of Inside Paper Core - 76mm Stretch Rate-100% ~ 300%
PLC Controller	LG make
Photo Eye Switch	Germany
Power Supply	Single Phase
Power Consumption	0.60 KW

JSW - 01 TT : 1500

PALLET STRETCH WRAPPING MACHINE

Capacity	20 Pallets / Hr.
Film	Width - 500mm Roll OD - 200mm Thickness - 28-35 micron
Turn Table Diameter	1500mm
Power Consumption	1.75 KW
Electric Connection	Single Phase, 230 V
Machine Dimension	2400mm (L) X 1500mm (W) x 2700mm (H)
Max Loading Weight	200 Kg. to 1500 Kg.
Film Delivery System	Film Stretch 300% Roll Diameter 200mm
Mechanical	Main Drive Type
Construction	MS Sheet, Laser Cut Turn Table, Al. Alloy Angle & Channel
Machine Weight	650 Kg.



STRETCH WRAPPING MACHINES

JSW - 01 A

FULLY AUTO PALLET STRETCH WRAPPING MACHINE - AUTO FILM CUTTING MACHINE

Capacity	20 Pallets / Hr.
Film	Width - 500mm Roll OD - 200mm Thickness - 28-35 micron
Turn Table Diameter	1500mm
Power Consumption	1.75 KW
Electric Connection	Single Phase, 280 V
Machine Dimension	2400mm (L) X 1500mm (W) x 2700mm (H)
Max Loading Weight	200 Kg. to 1500 Kg.
Film Delivery System	Film Stretch 300% Roll Diameter 200mm
Mechanical	Shipping Weight - 650 Kg Main Drive Type - Mitsubhishi
Construction	MS Sheet, Laser Cut Turn Table, Al. Alloy Angle & Channel



BATTERY OPERATED HAND STRAPPING MACHINE



JSW - 01 P

PALLET STRETCH WRAPPING MACHINE - WITH PRESSING

Capacity	20 Pallets / Hr.
Max Size of Pallet	1250mm (L) x 1100mm (W) x 1665 mm (H)
Film	Width 500mm Roll OD 200mm Thickness 28-35 micron
Turn Table	Speed 0-15 RPM Diameter 2000mm Height 80mm
Power Consumption	1.75 KW
Electric Connection	Single Phase 230 V
Control Voltage	230V / 50 Hz (Machine can run with Single Phase)
Machine Dimension	2650mm (L) x 1500mm (W) x 2850mm (H)
Wrapping Height	Max - 2450mm Min - 600mm
Load Capabilities	Max Load Size 1250mm x 1100mm x 2450mm Max Load Height 1200mm to 2000mm
Machine Weight	700 Kg.
Air Pressure	(Air Compressor Required - Client's Scope)

JSW - 01 ROB

ROBOT TYPE PALLET STRETCH WRAPPING MACHINE

Around Speed	90 Mtr. / Min.
Min Pallet Size	600mm (L) x 600mm (W)
Max Wrapping Height	2400mm
Film Width	500mm
Film Stretch	300% & 230% Two Step Change by Handle (250% & 200% Option)
Film Tension	Adjustable
Elevator Unit Speed	Adjustable
Machine Dimension	1600mm (L) x 1250mm(W) x 2770mm (H)
Machine Weight	450 Kg.



STRETCH WRAPPING MACHINES



JSW - 01 R ECO

REEL STRETCH WRAPPING MACHINE - ECONOMY

Working Size	Max - 600mm(W) x 450mm(Dia)
	Min - 100mm(W) x 200mm(Dia)
Electric Geared Motor	1 HP x 1440 RPM
Working Height	400mm
Break System	Manual Adjustment Type (Friction Type)
Speed	Variable
Working Height	700mm
Capacity	10 - 15 Reel per Hr. (approx)
	(Depending upon the size of reel as well as operator speed)
Weight Capacity	50 Kg.
POWER PRE-STRETCH UNIT FOR NEW DESIGNED 4TH GENERATION	
Structure	MS Angles / Channel Sheets, Aluminum with Power Coated
Machine Weight	200 Kg (approx)



JSW - 01 R

REEL STRETCH WRAPPING MACHINE

Working Size	Max - 500mm(W) x 600mm(Dia)
	Min - 100mm(W) x 200mm (Dia)
Turn Table Diameter	700mm
Capacity	25-30 Reels per Hr.
	(Depending upon the size of reel as well as operator speed)
Weight Capacity	50 Kg.
Machine Dimension	1600mm (L) x 750mm (W) x 1650mm (H)
Machine Weight	350 Kg.
PLC Control	Mitsubishi
AC Drives	Mitsubishi
Power Supply	240 V / 50 Hz Single Phase
POWER PRE-STRETCH UNIT FOR NEW DESIGNED 4TH GENERATION	



JSW - 01 HF - FABRIC

FABRIC ROLL STRETCH WRAPPING MACHINE

Electricity	240 V 50 Hz Single Phase
Roller Diameter	125mm
Roller Speed	4 - 45 R/Min.
Weight Capacity	200 Kg.
Production Capacity	50 - 60 Rolls / Hr.
Wrapping Size	Fabric Roll Diameter 100 - 500 mm
	Fabric Roll Length 1600mm (Max)
Machine Dimension	3400mm (L) x 750mm (W) x 1900mm (H)
Machine Weight	600 Kg (approx)

STRETCH WRAPPING MACHINES

JSW - 01 RING

RING STRETCH WRAPPING MACHINE

Max RPM	70 RPM
Standar Voltage	220V Single Phase 50 Hz Cycles
Installed Power	1 KW
Air Consumption	0.1 cmf
Air Pressure	5 Bar
Ring Open Diameter	300mm
Working Width	250mm
Film Width	2inch ~ 5inch (50mm ~ 125mm)
Max Spool Diameter	8inch (200mm)
Core Diameter	3inch (76mm)



JSW - 01 ARM

ARM TYPE PALLET STRETCH WRAPPING MACHINE





JSHL - 01 + JSH - 01 COMBO TYPE MACHINE - L SEALER WITH SHRINK TUNNEL

Sealing Area	450mm (W) x 550mm (L)
Max Product Height	150mm
Impulse Sealing System	Bottom Blade
Working Plate Height	820mm (On Stand)
Applicable Film	POF / PVC
Conveyor Speed	8 to 10 Mtr. / Min.
Dimension	1570mm (L) x 720mm (W) x 1025mm (H)
Total Weight	320 Kg. (approx)
Shrink Tunnel Size	450mm (W) x 250mm (H) x 1000mm (L)
Packing Speed	6 to 8 Packets / Min.
Electrical Parts	Schneider make Realy, Contractor, Switches, Temp. Controller, Timer Relay & Motor are Meiwa
Power Supply	3 Phase, 380 V - 14.5 Kw

JSH - 01 SHRINK TUNNEL MACHINE

Window Size	450mm (W) x 250mm (H)
Tunnel Length	1000mm
Package Speed	20 Packets / Min.
Film Type	POF / PE / PVC
Electrical Parts	Schneider make Realy, Contractor, Switches, Temp. Controller, Timer Relay & Motor are Meiwa
Pack Size (Max)	11inch (W) x 24inch (L) x 11inch (H)
Machine Dimension	1320mm(L) x 760mm (W) x 1480mm(H)
Machine Weight	185 Kg.
Power Supply	3 Phase, 380 V - 14.5 Kw
Conveyor Speed	Variable Max. Temp
Digital Temp. Control	0° to 300°
Tunnel Window Covering	Teflon & Asbestos
Shrink Material	PVC / Polyolefin
Roller	Chain Conveyor Type with Silicon Coated
Speed	Variable
Tunnel Body Structure	MS Power Coating
	Heated Cured with Safety Guards
	Heater Changeover is very Easy



JSH - 01 WEB WEB SEALER WITH SHRINK TUNNEL MACHINE

Film Type	Standard LDPE Shrink Film
Packing Capacity	6 Pack / Min.
Max Pack Size	600mm (W) x 300mm (H)
Power	35 Kw 3 440 V / 50 Hz
Air Pressure	6 Bar
Parts	PLC - Mitsubishi or Equivalent Air Pressure Systemt - Janatics or Equivalent Electric - Telemechanic Sensor - P & F German Main Switch & Switch Gear - Schneider Gear Motor - MGM Marvel or Equivalent Conveyor, VDF & Motor - Siemens (Germany)



JSH - 02

AUTO WEB SEALER WITH SHRINK TUNNEL + COLLATOR

Sealing Size	700mm (L)
Temperature	0~200 °C
Height of Work Table	850mm ± 50mm
Packing Speed	4 to 6 Packet / Min.
Power	30 KW
Power Supply	3 Phase 220V / 380V 50/60 Hz
Air Pressure	6~8 Kg/cm ² (Air Compressor Required - Client's Scope)
Max Packing Size	400mm (L) x 300mm (W) x 300mm(H)
Machine Dimension	1384mm (L) x 2716mm (W) x 1991mm (H)
Net Weight	490 Kg



JSH - 01 C

CONTINUOUS SIDE SEALING WITH SHRINK TUNNEL MACHINE

Package Size	Max - 520mm x 320mm x 260mm Min - 230mm x 280mm x 100mm
Weight Capacity	30 Kg.
Sealing Size	700mm (L) x 330mm (H)
Packaging Speed	10 to 20 Pack / Min.
Tunnel Window Size	600mm (L) x 400mm (W)
Power Supply	3 Phase 23 KW
Air Pressure	7 to 8 Bar (Air Compressor Required - Client's Scope)
Machine Dimension	3500mm (L) x 1800mm (W) x 2500mm(H)
Machine Weight	600 Kg. (approx)



PAPER, PRINT-MEDIA, PLASTIC INDUSTRIES MACHINES

JSHL - 01 ALS

AUTO L-BAR SEALER WITH
SHRINK TUNNEL MACHINE



Seal Bar	500mm (W) x 375mm (L)
Product Size	600mm (L) x 400mm (W) x 230mm (H)
Speed	10~20 Unit / Min.
Total Power	3 Phase, 380 V - 14.5 Kw
Machine Size	1700mm x 900mm x 1000mm
Shrink Tunnel	16inch x 8inch
Machine Weight	450 Kg.
Air Pressure	(Air Compressor Required - Client's Scope)

JSH - 01 WEB

WEB SEALER WITH SHRINK TUNNEL MACHINE




Film Type	Standard LDPE Shrink Film
Packing Capacity	4 to 6 Pack / Min.
Max Pack Size	600mm (W) x 300mm (H)
Power	48 Kw 3 440 V / 50 Hz
Air Pressure	6 Bar
Parts	PLC - Mitsubishi or Equivalent Air Pressure Systemt - Janatics or Equivalent Electric - Telemechanic Sensor - P & F German Main Switch & Switch Gear - Schneider Gear Motor - MGM Marvel or Equivalent Conveyor, VDF & Motor - Siemens (Germany)

PAPER, PRINT-MEDIA, PLASTIC INDUSTRIES MACHINES



JSW - 01 HF (PAPER)

ROLL STRETCH WRAPPING MACHINE

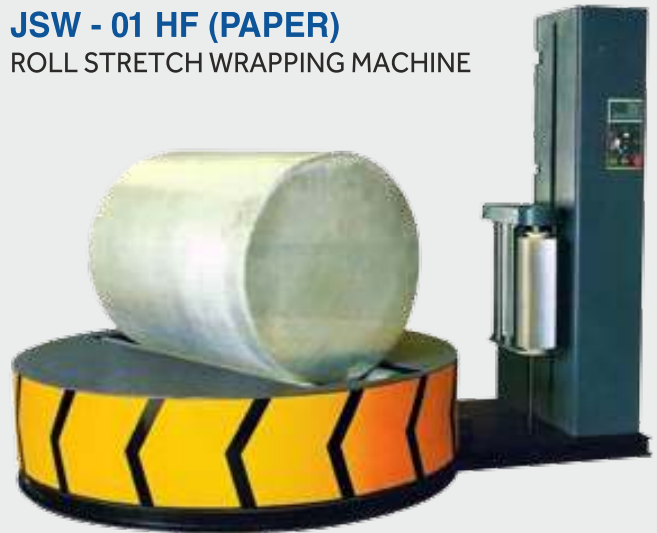

Turn Table Diameter	2000 mm
Turn Table Height	460mm Turn
Table Speed	0 to 12 RPM / Min.
Air Supply	6 Bar
Electricity	1 HP Single Phase 220V 50 Hz
Turn Table Weight Capacity	1500 Kg.
Production Capacity	15 to 20 Rolls / Hr.
Machine Dimension	2800mm (L) x 2000mm (W) x 2300mm (H)
Wrapping Size	(Wrapping Size can be customized as required)
Paper Roll Diameter	600 to 1500 mm
Paper Roll Length	400 to 1650 mm
Paper Roll Weight	400 to 1500 Kg. (Max)



JSW - 01 HF

PAPER ROLL
STRETCH WRAPPING MACHINE



Roller Diameter	220mm
Roller Speed	50 RPM / Min.
Air Line	6 Bar (Air Compressor Required - Client's Scope)
Electricity	3 415-440 V AC Three Phase
Power	3 HP
Weight Capacity	2000 Kg.
Production Capacity	10 to 15 Rolls / Hr.
Machine Dimension	2900mm (L) x 2000mm (W) x 2900mm (H)
Standard Wrapping Size	(Wrapping Size can be customized as required)
Roller Diameter	700 to 1500 mm
Roller Length	500 to 2500 mm
Machine Weight	1500 Kg. (approx.)

PAPER, PRINT-MEDIA, PLASTIC INDUSTRIES MACHINES



TP - 102

AUTOMATIC BOX STRAPPING MACHINE

Dimension	1600mm (L) x 700mm (W) x 1600mm (H)
Arch Size	850 x 600 H/mm
Weight	220 Kg.
Max. Tension	80 Kgs.
Package Size	Max - 750mm (W) x 480mm (H) Min - 100mm (W) x 30mm (H)
Strap Size	9, 12, 15mm (any one with Machine)
Strap Joint	Heat Sealed
Strapping Speed	2 Sec / Strap (in standard Arch Size)
Strap Coil Size	0-200mm (optional)
Driving Motor	3 Motors 1/2 HP, 1/3 HP
Power Consumption	1 Kw
Power Supply	3φ 415V 50 Hz

RQ - 8CR

AUTOMATIC STRAPPING MACHINE - FOR CORRUGATED INDUSTRY

Dimension	1500mm (W) x 1722mm (H) x 610mm (D)
Weight	200 Kg.
Arch Size	1650mm (W) x 500mm (H)
Package Size	Max - 570mm (W) x 820mm (H) Min - 30mm (W) x 100mm (H)
Joint Strap Coil	Heat Seal / Polypropylene ID 200 x OD 450 x W 200mm
Strap Width	5, 6, 9, 12, 15.5 mm
Strap Tension	Max 80 Kg 150mm Stroke
Speed	1.7 Sec / Strap 35 Straps / Min.
Power Supply	110, 120, 200, 220, 230, 240 V 1 Phase 50/60 Hz 0.65 KVA
Air Pressure	(Air Compressor Required - Client's Scope)



IQ - 400


SEMI AUTOMATIC TABLE TOP STRAPPING MACHINE

Dimension	780mm (W) x 775mm (H) x 543mm (D)
Weight	65 Kg.
Table Height	750mm
Package Size	Min - 100mm (W) x 30mm (H)
Joint / Strap / Coil	Heat Seal / Polypropylene ID 200 or 230 x W 200mm
Strap Width	5, 6, 9, 12, 15.5 mm / 0.45 - 0.7 mm
Strap Tension	Max 500 N (51kgf) or 150mm Stroke
Power Supply	100 - 120, 200 - 240 V 1 Phase 50 / 60 Hz 0.25 Kw

MISCELLANEOUS MACHINES



WEIGHING CHECKING MACHINE

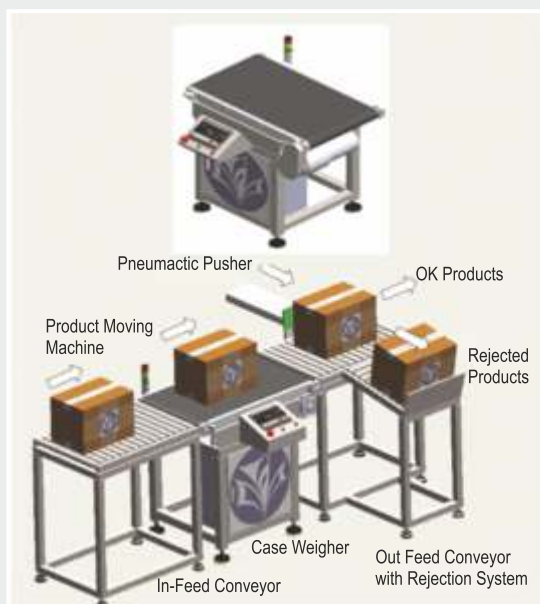

ONLINE WEIGHING CHECKING MACHINE

Weighing Range	0 - 30 Kg
Accuracy	20g (accuracy depends on the product)
Weighing Platter Size	800mm (L) x 500mm (W)
Belt Width	500mm
Handling Size	46 - 500mm (L) x 20 - 450mm (W) x 10 - 400mm (H)
Weighing Sensor	Double Beam High Output
Belt Speed	10~30m / min. (variable)
Mechanical Speed	Max 20 Items / Min.
Belt Height	750mm
Protection Class	IP - 30
Operation	7" Colour Disply
Processing Signal	Digital Processing Signals
Pre-Set Functions	200 Program Pre-Set Memory



JS - 01 CRE CARTON CREATOR

Machine Dimension	2005mm (L) x 1955mm (W) x 1290mm (H)
Tape Type	Draft Paper or BOPP Tape
Power	0.4 KW
Air Connection	>_ 6 Kg / cm2 (Air Compressor Required - Client's Scope)
Protection Grade of	
Power Currency	Ip54
Noise	<_ 75DB
Environment Condition	Humidity <_ 98%
Temp.	-10 0C ~ 400C
Working Speed	0 - 12 Cases / Min.
Carton Size	330 - 530mm (L) x 165 - 330mm (W) x 300 - 570mm (H)
Power Supply	1 Phase 220 V 50 Hz
Machine Weight	400 Kg.



MISCELLANEOUS MACHINES

JSC / TP - 102

COMBO MACHINE - SEALING + STRAPPING

Box / Carton Size	300-750mm (L) x 150-500mm (W) x 150-500mm (H)
Tape Width	48 to 72mm
Arch Size	850mm x 600mm
Max Tension	80 Kg
Packing Speed	4 to 5 Pack / Min.
Control	PLC & AC Driven
	Siemens make or equivalent
Switch Gear	Schneider
Power Supply	3 415 - 440 V AC & 220 - 240 V AC 50 Hz
Power Consumption	1.66 KW
Strap Joint	Heat Sealed
Speed	76 Sec. (for both operation)



JSR / FPR - 01 (Random)

COMBO MACHINE - FULLY AUTOMATIC RANDOM SEALING & STRAPPING MACHINE

Box Size	300-600mm (L) x 250-480mm(W) x 150-500mm(H)
Tap Width	48 to 72mm
Arch Size	850mm(W) x 600mm(H)
Packaging Speed	4 to 5 Pack / Min.
Control	PLC Base - Mitsubishi
Air Pressure	3 to 4 Bar
Strap Joint	Heat Sealed
Power Supply	3 Phase 2.3 KW



CONVEYORS

DELIVERY & TRANSPORTATION


**TELESCOPIC
CONVEYORS**



**TRUCKING
CONVEYORS**



**SPIRAL
CONVEYORS**

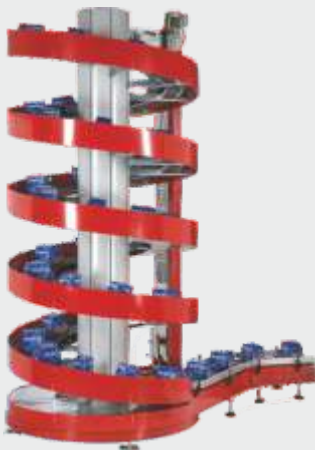

**INCLINE
CONVEYORS**



**VERTICAL
CONVEYORS**



**SLAT
CONVEYORS**




**S-TYPE MODULAR
CONVEYORS**



CONVEYORS

DELIVERY & TRANSPORTATION

ROLLER CONVEYORS

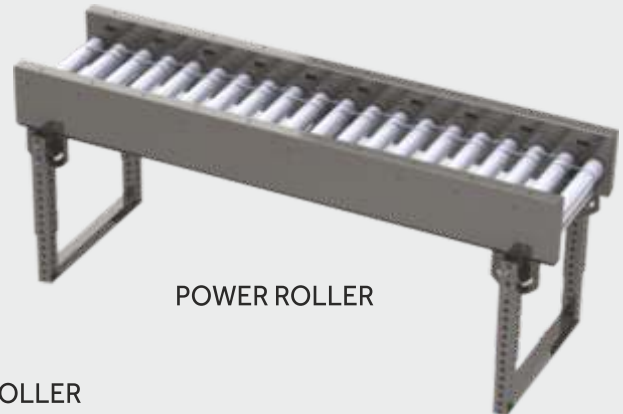

BELT CONVEYORS



PAPER ROLL CONVEYOR SYSTEMS





Original Picture of Head Office



Original Picture of Production Unit



J Pack Engineers Pvt. Ltd. manufactures and implement packaging solutions Pan-India and establish long term partnerships with customers to support them in optimizing their packaging value chain.

Established in 1999, under the experienced leadership of Mr. Jignesh Patel - J Pack aspires to be the leader in Packing and Packaging Machines. With the highly experienced team of professionals, State-of-the-art infrastructure and client centric approach J Pack provide products and solutions that comply with International standards and strictest safety criteria.

J - PACK ENGINEERS PVT. LTD.

32, Devraj Industrial Park, Piplaj - Pirana Road, Piplaj, Ahmedabad - 382 405,
Gujarat, INDIA.

Tel: +91 93764 90009 | +91 73594 60003, e-mail: info@jpackengineers.com

www.jpackengineers.com

Distributor: