



CLASS

150

SAUNDERS TYPE A WEIR PATTERN HAND WHEEL OPERATED DIAPHRAGM VALVE

FOCET

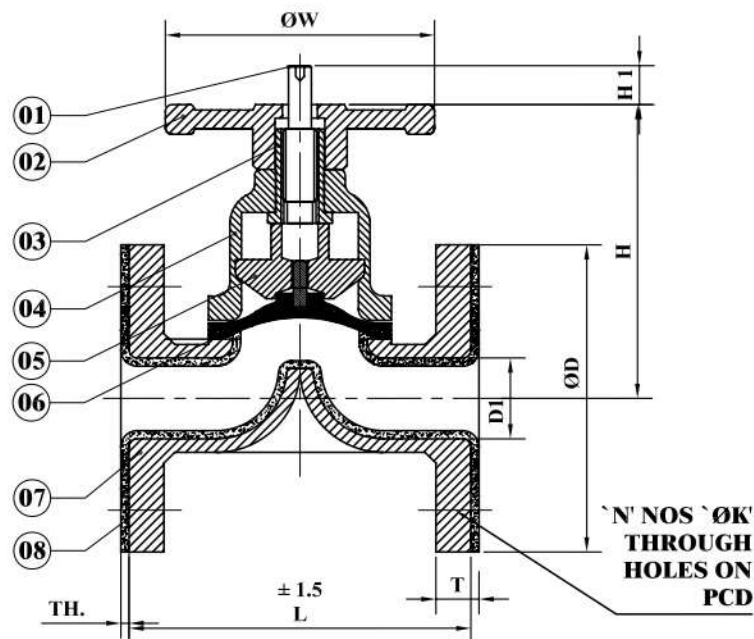

CLASS - 150										
ØDN	L	ØD	T	PCD	N	K	H	H1	W	TH
15	102	89	11	60.4	4	16	76	9.5	70	3.0
20	117	98	12.7	69.8	4	16	90	15	70	3.0
25	127	108	14.2	79.2	4	16	108	17	100	3.0
32	146	117	15.9	88.9	4	16	120	19	100	3.0
40	159	127	17.5	98.5	4	16	142	21	114	3.0
50	190	152	19	120.6	4	19	171	28	150	3.0
65	216	178	22.3	139.7	4	19	200	32	150	3.0
80	254	190	24	152.4	4	19	241	45	200	4.0
100	305	229	24	190.5	8	19	273	60	250	4.0
125	356	254	24	216	8	22	324	65	300	5.0
150	406	279	25	241	8	22	368	80	350	5.0
200	520	343	29	298	8	22	514	119	482	6.0
250	635	406	25	362	12	25	610	144	610	6.0
300	750	483	32	432	12	25	710	166	710	6.0

SR. NO.	PARTS NAME	MATERIAL	QTY.
01.	SPINDLE	CARBON STEEL	1
02.	HAND WHEEL	S G I	1
03.	BUSHING (NUT)	GM ASTM B 62	1
04.	BONNET	CI IS 210 GR. 20	1
05.	COMPRESSOR	CI IS 210 GR. 20	1
06.	DIAPHRAGM	AS SPECIFIED	1
07.	BODY	CI IS 210 GR. 20	1
08.	LINING	AS SPECIFIED	1
09.	BONNET STUD & NUT	CS A 307-GB	4
10.	GREASE NIPPLE	BRASS	1

SUITABLE FOR				
STEAM	WATER	OIL	AIR	GAS
●	●	●	●	

ALL DIMENSION ARE IN MM

HYD. TEST PRESSURE															
SIZE		15	20	25	32	40	50	65	80	100	125	150	200	250	300
HYDRO	SHELL	14.00Kg / Cm ²				12.00Kg / Cm ²				10.50Kg / Cm ²			8.75Kg / Cm ²		7.00Kg / Cm ²
STATIC	SEAT	9.50Kg / Cm ²				8.00Kg / Cm ²				7.00Kg / Cm ²			6.00Kg / Cm ²		4.50Kg / Cm ²
AIR SET		5.00				5.00				5.00			5.00		5.00

FOCET VALVES PVT. LTD.