


Built-out spring RWA-STS Type

Water Hose Reel (RWA-STS Type, Spring Rewind)

- High pressure water hose reel.
- Stainless steel material.
- It can be serviced various applications such as high pressure water reel, cold & hot water reel...etc.
- Customized reel is available.

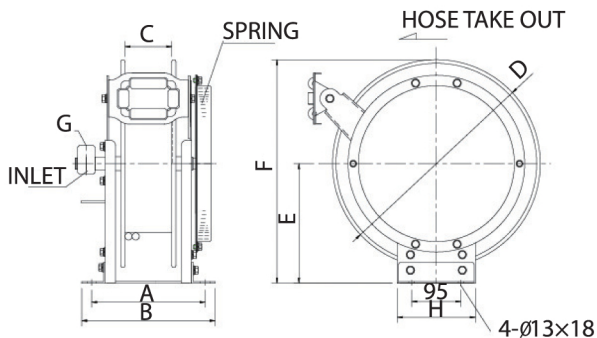

Model	Hose			W.P Max (kg/cm ²)	External Size								Remark
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RWA-1310STS	Synthetic Rubber	13	10	5	278	318	150	400	230	430	PT1/2"	150	하우징 외장형
RWA-1315STS	Synthetic Rubber	13	15	5	278	318	150	400	230	430	PT1/2"	150	
RWA-1320STS	Synthetic Rubber	13	20	5	278	318	150	450	260	485	PT1/2"	150	
RWA-1325STS	Synthetic Rubber	13	25	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1330STS	Synthetic Rubber	13	30	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1340STS	Synthetic Rubber	13	40	5	338	378	210	500	290	540	PT1/2"	200	
RWA-1610STS	Synthetic Rubber	16	10	5	278	318	150	450	260	485	PT1/2"	150	
RWA-1615STS	Synthetic Rubber	16	15	5	278	318	150	450	260	485	PT1/2"	150	
RWA-1620STS	Synthetic Rubber	16	20	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1625STS	Synthetic Rubber	16	25	5	338	378	210	500	290	540	PT1/2"	200	
RWA-1630STS	Synthetic Rubber	16	30	5	338	378	210	500	290	540	PT1/2"	200	하우징 내장형
RWA-1640STS	Synthetic Rubber	16	40	5	338	378	210	550	315	590	PT1/2"	200	
RWA-1910STS	Synthetic Rubber	19	10	5	338	378	210	450	290	515	PT3/4"	200	
RWA-1915STS	Synthetic Rubber	19	15	5	338	378	210	450	290	515	PT3/4"	200	
RWA-1920STS	Synthetic Rubber	19	20	5	338	378	210	500	290	540	PT3/4"	200	
RWA-1925STS	Synthetic Rubber	19	25	5	338	378	210	550	315	590	PT3/4"	200	
RWA-1930STS	Synthetic Rubber	19	30	5	338	378	210	550	315	590	PT3/4"	200	
RWA-2510STS	Synthetic Rubber	25	10	5	338	378	210	450	290	515	PT1"	200	
RWA-2515STS	Synthetic Rubber	25	15	5	338	378	210	500	315	565	PT1"	200	
RWA-2520STS	Synthetic Rubber	25	20	5	408	448	280	500	315	565	PT1"	200	
RWA-2525STS	Synthetic Rubber	25	25	5	408	448	280	550	345	620	PT1"	200	
RWA-2530STS	Synthetic Rubber	25	30	5	408	448	280	550	345	620	PT1"	200	

※ The above hoses are for cold water. The hose for hot water (Less 70℃ or Less 100℃) is additional specifications.