





Electric Scissor Lifts
JCPT-DC (High Rise)

Sumner
Handling Equipments



JCPT0808HD / JCPT1008HD



JCPT1012DC / JCPT1212DC



Convenience



Tight turning radius



Platform foot lock



Folding guardrails



Waterproof



Compact


	JCPT0808DC	JCPT1008DC	JCPT1012DC	JCPT1212DC
S.W.L	380 kg	230 kg	450 kg	320 kg
S.W.L on extension	113 kg	113 kg	113 kg	113 kg
Maximum workers number	2	2	2	2
Working height	8.0 m	10.0 m	10.0 m	12.0 m
Platform floor height	6.0 m	8.0 m	8.0 m	10.0 m
Overall length	2.48 m	2.48 m	2.48 m	2.48 m
Overall width	0.81m	0.81m	1.15m	1.15m
Overall height(Rails up)	2.21 m	2.34 m	2.34 m	2.47 m
Overall height(Rails down)	1.75 m	1.88 m	1.86 m	1.99 m
Platform Size	2.27X0.81m	2.27X0.81m	2.27X1.12m	2.27X1.12m
Platform extension size	0.9m	0.9 m	0.9 m	0.9 m
Ground clearance (Stowed)	0.1 m	0.1 m	0.1 m	0.1 m
Ground clearance (Raised)	0.019 m	0.019 m	0.019 m	0.019 m
Wheelbase	1.87 m	1.87 m	1.87 m	1.87 m
Turning radius (Inside)	0 m	0 m	0 m	0 m
Turning radius (Outside)	2.19 m	2.19 m	2.33 m	2.33 m
Drive motor	24V/ 1.5kw	24V/ 1.5kw	24V/ 1.5kw	24V/ 1.5kw
Lifting motor	24V/ 3kw	24V/ 3kw	24V/ 3kw	24V/ 3kw
Travel speed (Stowed)	4.0 km/h	4.0 km/h	4.0 km/h	4.0 km/h
Travel speed (Raised)	0.8 km/h	0.8 km/h	0.8 km/h	0.8 km/h
Up/Down speed	22 / 34 sec	22 / 40 sec	30 / 33 sec	30 / 38 sec
Batteries	4X6 V/210 Ah	4X6 V/210 Ah	4X6 V/210 Ah	4X6 V/210 Ah
Integrated charger	24V/ 25 A	24V/ 25 A	24V/ 25 A	24V/ 25 A
Gradeability	30%	30%	30%	30%
Maximum working slope	2-3°	2-3°	2-3°	2-3°
Tyres	Φ381X127mm	Φ381X127mm	Φ381X127mm	Φ381X127mm
Weight	1950 kg	2100kg	2300kg	2730kg

Standard Equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- Automatic brakes system
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection



Electric Scissor Lifts JCPT-DC (High Rise)

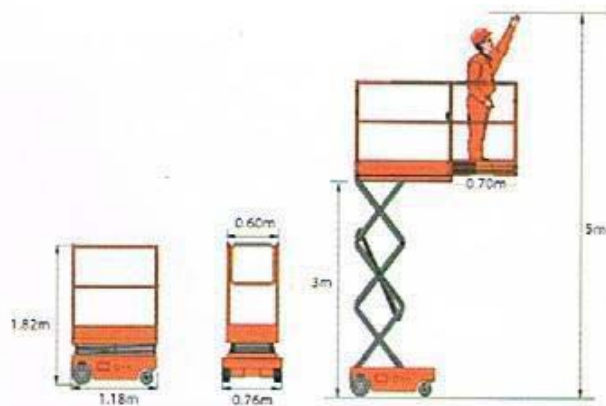

Electric Scissor Lifts JCPT - 3.0 (DC)

Standard equipment

- Proportional controls
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Extended platform
- Charger protection
- Flashing beacon

Can Drive at Full Height

JCPT - 3.0 (DC)	
	S.W.L. 240 kg
	Working height 5.00m
	Platform floor height 3.00m
	Overall length 1.18m
	Overall width 0.76m
	Overall height 1.92m
	Platform size 1.17X0.60m
	Ground clearance 0.06m
	Wheelbase 0.99m
	Turning radius 0
	Drive motors 2X24VDC/0.4kw
	Lifting motor 24VDC/0.8kw
	Travel speed
	Stowed 4 Km/h
	Raised 0.8 Km/h
	Up/Down speed 28/41 sec
	Batteries 2X12V/95Ah
	Integrated charger 24V/12A
	Gradeability 30%
	Tyres
	Drive motors 230X80mm
	Weight 495kg



Single roll out deck



Access step



Side out tray



Forklift pockets



Compact size

Electric Scissor Lifts JCPT - 3.0 (DC)

Aerial Platforms



Sumer[®] AXIS



Sumer

3477, Bajrang Ball Street,
Chawri Bazar, Delhi-110006
Phones : 23267598, 23266973
Tele Fax : 91-11-23279661
Mobile : 98688 16111