



त्रिमूर्ति®

सुंदरता की पहचान



Trimurti Wallcare Products

www.trimurtiprducts.com

Index

About us	01-02
Director's Message	03
Certifications & Awards	04-05
Media Coverages	06
Infrastructure	07
Gypsum Plaster (P.O.P)	08-10
One Coat Gypsum Plaster	11-12
Quick Bond	13
Ceiling Products	14-15
Wall Putty	16-18
Silk Wall Putty	19
Waterproof Wall Putty	20
Decorative White Cement	21
Premium Grey Cement	22
Tile Adhesive	23-27
Tile Grout	28
Tile Grout Admix	29
Epoxy Grout	30
Tile Cleaner	31
Tile Spacer	32
Notch Trowel	33
AAC Block Joining Mortar	34
Our Clients	35
Our Presence	36





About us

“If one thinks about wall care products, the name, Trimurti, must flash through their minds.”

That was the vision with which Mr. Manik Gupta & Mr. Rahul Gupta laid the foundation of Trimurti in 2004. Since then we have come a long way. Over the course of more than 2 decades, we have, in fact, become the one-stop shop for Gypsum Plaster, Wall Putty, One Coat Gypsum Plaster, Quick Bond, Decorative White Cement, Tile Adhesive and Ceiling products. We are one of the leading manufacturers and exporters in India.

Trimurti has a competent workforce of skilled and talented people who make this company a well-lubricated single machine, that works efficiently to service its clients anytime and in any capacity. Trimurti has set its quality standards equivalent to the international Standards so that our consumers can get world-class products locally. Our focus has always been consumer-centric and we work relentlessly to make better living opportunities, homes, environment, and community. This approach and our corporate professionalism have given Trimurti exponential growth and created an enviable rapport among our clients which made us the most trusted and preferred brand among Builders, Architects, Interior Decorators, and Contractors.

Trimurti also invests in the research and development of its products. We make sure that innovation and creativity are not lost in our products and go hand in hand as suitable for our client's needs. Our research team always tries to find out the highest quality material and superior yet sustainable technologies to work with. After all, our products bring infrastructures a beauty that lasts.

Trimurti is an ISO 9001:2015 & 14001:2015 certified and I.S.I. accredited company. Trimurti has its headquarters in New Delhi with production facilities in Bikaner and Alwar, Rajasthan. Trimurti is active in more than a dozen regions of India including Punjab, Uttarakhand, Haryana, New Delhi, UP, Bihar, Assam, Rajasthan, Gujarat, Madhya Pradesh, Chhattisgarh, Karnataka and Maharashtra. Our first-rate portfolio of brands includes ATS, Delhi Development Authority, Hilton Hotels & Resorts, DLF, L&T, TAJ, DMRC, and many more.



Mission

To keep a consistent growth in connecting with the people of India and become a one stop solution for all their wall care product requirements.

Vision

To become India's global face of the best wall care products in the entire nation and take the Indian wall care products to the world stage with the trust of people in Trimurti.

Director's Message



Mr. Manik Gupta

Director

Trimurti Wall Care Products
Pvt. Ltd.

Our religious scriptures have a famous saying of “Vasudhaiva Kutumbakam” which means “The whole world is one family”, and that exactly is Trimurti’s vision here. When Trimurti treats the world as one family, it cares for it like its own. So, the products which Trimurti develops are not just the best but also sustainable. The vision helps Trimurti to hold its ground and still have no limits to its reach.

Trimurti started back in 2004 and a lot has changed since then but the core fundamentals have never changed. We believe in customer satisfaction as we are here for the long haul. If a customer is satisfied with Trimurti’s products, then and only then they are going to come back to us. And that satisfied customer is the best investment one can do to advertise their products. That’s why we focus strongly on understanding the needs of a customer because it might look that all the buildings you see are made from similar materials but it’s not the truth. Be it a Builder, Architect, Interior Decorator, or Contractor, every client has their own vision of their creation and we respect that. Hence, we dedicate a whole team of experts to deal with a particular client. It helps us understand them better and build trust.

One of the most important aspects of our working approach is to “Think Green”. Trimurti doesn’t work just for profit but for society as well. That is the reason we try to minimize the carbon footprint and chemical waste the industry creates. It starts with our choices of raw materials energy consumption low emissions and so on. We see to it that “Vasudhaiva Kutumbakam” is realized and protected.

There is a reason why we are called Trimurti. Trimurti in its pure sense is the triad of our supreme divinity Lord Brahma – The Creator, Lord Vishnu – The Preserver, and Lord Shiva – The Destroyer. And as we are in the construction industry, we treat these three with the utmost respect. Trimurti believes that the combination of these three divine powers is a necessity in the construction industry.

We start with the creation and focus that it should be beautiful and long-lasting but we also keep in mind that the destroying power of our nature is stronger so we put extra research and efforts to make our products strong enough to survive any situation.

Trimurti started with the idea of helping people create their own world, achieve their dreams, and most importantly create it beautifully. So, our products are not just strong and sustainable but it beautifies the overall structure. Who doesn’t want their homes, offices, hotels, highways, etc. to look like a masterpiece?

We also want our clients to receive the best product timely and without any discrepancy so we don’t only manufacture the said products but also export, distribute, and supply them all over the world. So that you get what you paid for and as quickly as possible. The exponential growth of our company in such a small duration has proven that until now our thoughts and approach are in the right place and our customers are happy. Our vision is to keep them happy and continue with the path shown to us by the divine trinity, i.e. Trimurti.



Mr. Rahul Gupta

Director

Trimurti Wall Care Products
Pvt. Ltd.

Certifications & Awards

Superior product quality is our first priority to us and we make no compromise whatsoever to achieve the same. Stringent quality tests are performed at various levels of production, supervised by competitive quality controllers. Under the shade of our well-equipped quality control unit, we make sure that not even a whisker is missed in quality checks, leaving no scope for errors to creep. We take pride in the fact that our products are **ISO 9001:2015 & 14001:2015 certified** and **ISI accredited** and that is what inspires us to walk an extra mile towards achieving greater heights of product quality.



ISO 9001:2015

The Quality Management System



ISO 14001:2015

The Environmental Management System



Best Emerging Company of The Year


Nation Wide Awards 2020



**Best Wallputty
Manufacturer in North India**
Global Excellence Awards 2023



**Best P.O.P. & Wallputty
Manufacturer in North India**
Global Excellence Awards 2022

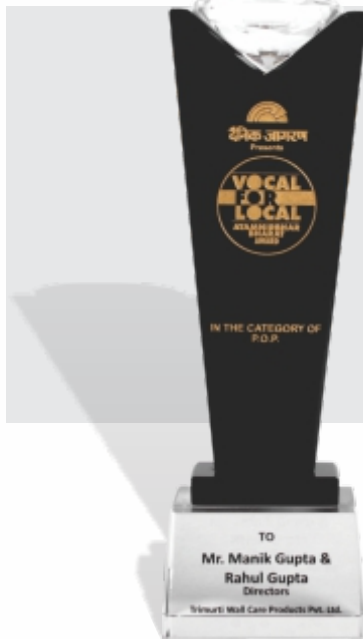

**Local For Vocal
Atmanirbhar Bharat 2021**
Dainik Jagran



Certificate of Enlistment
Construction Industry Development Council



Users Choice 2021
Just Dial

Media Coverages



Trimurti offers impeccably exceptional wall care services to foster belief and reliance.

Outlook

Treating The World As One Big Family, Trimurti Cares For Your Walls As Much As You Do.

ANI

South Asia's Leading Multimedia News Agency

Trimurti, wall care products manufacturer, launching its new range of products.

Business Standard

Trimurti is one of the most recognised brands for manufacturing wall-care products.

Forbes INDIA

Trimurti wall care products won the Best Emerging Company Award from Business Mint.

HT Hindustan Times

Trimurti has been pioneering in wall finishing products for the last two decades in India.



दिल्ली में आयोजित वॉल केयर प्रोडक्ट्स प्रदर्शनी में त्रिमूर्ति ने लांच किए कई नए प्रोडक्ट्स

INDIATV

दिल्ली में आयोजित वॉल केयर प्रोडक्ट्स प्रदर्शनी में त्रिमूर्ति ने लांच किए कई नए प्रोडक्ट्स

Infrastructure

The company has grown rapidly in a short span of time with its headquarters in New Delhi. Keeping in mind the pros and cons, our infrastructure setup is a result of a well-engineered thought process. Our manufacturing unit is spread over a gigantic area of 15000 sq. mtrs. in Bikaner, Rajasthan, which is the heart of India's best raw gypsum mines. Also, we acquire another plant in the industrial area of Alwar to achieve more productivity in no time. It is an amalgamation of wide-area, top-class machines and well-equipped laboratories with industry professionals which ensure consistency in product quality in the required amount of production 24x7, 365 days of the year.

15,000
Sq. Mtrs
FINEST GYPSUM
AREA IN BIKANER



OUR PRODUCTS

Gypsum Plaster

Trimurti Gypsum Plaster is a white powdery chemical compound called hydrated calcium sulphate that is usually obtained from calcining gypsum. In other words, we can say that the gypsum plaster is generally made up of heated gypsum at a high temperature.

Trimurti Gypsum Plaster is most suitable for the application of internal plastering system as punning of walls, ceilings, and all decorative works like cornices, mouldings, and arches. Finishing defines the appearance and durability of the structure. Trimurti Gypsum Plaster is helpful in giving your house a desirable finish. Made out of high-quality Gypsum, Trimurti Gypsum Plaster is a white-coloured powder used for applying early coats to the interior walls and shaping the structure or creating casts.

The best part of Trimurti is that it hardens slowly with extra coverage and impurities-free features which makes it favourable to the construction teams and saves their time. Trimurti is one of the largest and best quality Gypsum Plaster manufacturers in India.



Smooth Finish



Less Paint Consumption

IS : 2547



PART-I

CM/L-3023835

General Specifications:

Setting Time	15-20 min.
Residue	4% – 5%
Whiteness	70% – 72%
ISO Certified	Yes
ISI Certified	Yes
Wastage	NIL
Transverse Strength (kg/cm ²)	16-20
Compressive Strength (N/mm ²)	2-4
Density (kg/m ³)	750-800
Chemical Composition	Calcium Sulphate Hemihydrate [CaSO ₄ .1/2H ₂ O]
Water to Material Ratio	1 : 1.25
Coverage (1kg)	1 sq.ft. with 12mm thickness
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.



Packaging : 1kg, 2kg, 20kg, 25kg & 40kg

Note: Mix powder in water, not vice versa.
(*All tested results are under lab condition)

Expert Plaster

Trimurti Expert Plaster is one of the best-selling products in the Gypsum Plaster Segment. Expert Plaster provides extra whiteness and expands coverage. What makes Trimurti Expert Plaster the best is the scientific research involved in producing this international standard product. Our research and development team ensures the use of the best raw material from best gypsum mines so that it doesn't crack or shrink after hardening. Also, the slow drying helps it become durable and long-lasting. Once applied, it will protect and beautify the building for years and without any constant maintenance.



Super White & Super Strength



Extra Coverage



Made From Indian & Imported Gypsum



Special Power Packing

General Specifications:

Setting Time	15-20 min
Residue	2% – 4%
Whiteness	74% – 78%
ISO Certified	Yes
ISI Certified	Yes
Wastage	NIL
Transverse Strength (kg/cm ²)	18 -22
Compressive Strength (N/mm ²)	3 - 5
Density (kg/m ³)	700-750
Chemical Composition	Calcium Sulphate Hemihydrate [CaSO ₄ .1/2H ₂ O]
Water to Material Ratio	1 : 1.25
Coverage (1kg)	1.25 sq. ft. with 12 mm thickness
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.

IS : 2547



PART-I
CM/L-3023835



Packaging : 25kg

Note: Mix powder in water, not vice versa.
(*All tested results are under lab condition)

Expert Plaster Pro +

Trimurti Expert Plaster is one of the best-selling products in the Gypsum Plaster Segment. Expert Plaster provides extra whiteness and expands coverage. What makes Trimurti Expert Plaster the best is the scientific research involved in producing this international standard product. Our research and development team ensures the use of the best raw material from best gypsum mines so that it doesn't crack or shrink after hardening. Also, the slow drying helps it become durable and long-lasting. Once applied, it will protect and beautify the building for years and without any constant maintenance.



Super White & Super Strength



Extra Coverage



Smooth Finish



Less Residue

General Specifications:

Setting Time	15-20 min
Residue	2% – 4%
Whiteness	76% – 80%
ISO Certified	Yes
ISI Certified	Yes
Wastage	NIL
Transverse Strength (kg/cm ²)	18 -22
Compressive Strength (N/mm ²)	3 - 5
Density (kg/m ³)	700-750
Chemical Composition	Calcium Sulphate Hemihydrate [CaSO ₄ .1/2H ₂ O]
Water to Material Ratio	1 : 1.25
Coverage (1kg)	1.25 sq. ft. with 12 mm thickness
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.

IS : 2547



PART-I
CM/L-3023835



Packaging : 25kg

Note: Mix powder in water, not vice versa.
(*All tested results are under lab condition)

One Coat Gypsum Plaster (Perlite Based)

The One Coat Gypsum Plaster by Trimurti is a Perlite gypsum-based plaster designed to offer an alternative to traditional plastering techniques. This lightweight plaster can deliver four times more insulating capacity than others. With Trimurti One Coat Gypsum Plaster, you only need to apply one coat to the brick wall and the surface is ready for paint. It can be used on a variety of interior surfaces, including red bricks, AAC blocks, and concrete surfaces. The plaster is a pre-mixed single-coat plaster and does not require the application of sand, cement, or P.O.P. Its also improve workability and provide better coverage.



No Water Curing Needed



No Shrinkage Cracks

Made With As Per
Indian Standard
IS:2547 Part: I / II

	Quality Assurance	Direct Application	Line & Level	Smooth Finish	Time Saving	Water Curing	Shrinkage Cracks	Fire Resistant	Heat Resistant	Light Weight Plaster	Drying Time
Sand Cement Plaster	—	✓	—	—	—	✓	✓	—	—	—	28 days
P.O.P.	✓	—	✓	✓	—	Does Not Require	✓	—	—	✓	72 hrs
Trimurti One Coat Gypsum Plaster	✓	✓	✓	✓	✓	Does Not Require	Does Not Appear	✓	✓	✓	72 hrs

General Specifications:

Color of Finished Surface	White
Density kg/m ³ (Max)	700-740
Setting Time	20-25 mins.
Compressive strength (N/mm ²)	4-7
Transverse Strength (kg/cm ²)	35-45
Water to Material Ratio	1 : 1.5
Coverage (1kg)	0.85 - 0.95 sq.ft. with 15mm Thickness
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.

Note: Mix powder in water, not vice versa.
(*All tested results are under lab condition)



Packaging : 40kg

One Coat Gypsum Plaster

(Vermiculite Based)

Trimurti's One Coat Gypsum Plaster is a Vermiculite gypsum-based plaster created to offer a better approach to traditional plastering. Its vermiculite-based Beta-Hemihydrate formulation ensures working and setting characteristics. It can deliver thrice more insulating capacity than others. As the name suggests, you only need a single coat of One Coat Gypsum Plaster to the brick wall and its done. It is suitable for internal surfaces which include red bricks, AAC blocks, and concrete surface walls. It is a premixed single-coat plaster that eliminates sand, cement, and P.O.P. application.



No Water Curing Needed



No Shrinkage Cracks

Made With As Per Indian Standard
IS:2547 Part: I / II

	Quality Assurance	Direct Application	Line & Level	Smooth Finish	Time Saving	Water Curing	Shrinkage Cracks	Fire Resistant	Heat Resistant	Light Weight Plaster	Drying Time
Sand Cement Plaster	—	✓	—	—	—	✓	✓	—	—	—	28 days
P.O.P.	✓	—	✓	✓	—	Does Not Require	✓	—	—	✓	72 hrs
Trimurti One Coat Gypsum Plaster	✓	✓	✓	✓	✓	Does Not Require	Does Not Appear	✓	✓	✓	72 hrs

General Specifications:

Color of Finished Surface	White
Density kg/m ³ (Max)	760-780
Setting Time	20-25 mins.
Compressive strength (N/mm ²)	3-6
Transverse Strength (kg/cm ²)	30-40
Water to Material Ratio	1 : 1.5
Coverage (1kg)	0.75 - 0.80 sq.ft. with 15mm Thickness
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.

(*All tested results are under lab condition)



Packaging : 40kg

Quick Bond

Trimurti Quick Bond is a totally new and advanced replacement for the conventional hacking process where we have to dent the surface in order to create a proper mechanical bond between structure and plaster. It increases the pull-out strength by 20 times in comparison with the conventional hacking process. It is a unique formula of sand fillers, adhesives, and polymers that improve its bonding properties.

Trimurti Quick Bond can be applied on any concrete surface like R.C.C. columns, beams, slabs, shear walls, or any other low-suction surfaces. It is a faster bonding agent that enables the preparation of ceiling and wall surfaces within 24 hours. It also has a dual bonding feature that provides mechanical as well as chemical grip and eliminates the risk of debonding gypsum or sand cement plaster.



Ready To Use



Dual Bonding



Applied On Any Concrete Surface



Makes Identification Easy

General Specifications:

Setting Time	24 Hrs.
Color	Green
Bonding Time	20X Than Conventional Hacking
Coverage (1 kg)	Approx. 30-35 sq.ft.
Type	Colloidal Solution with Suspended Solids
Chemical Composition	Polymer Based Liquid
Shelf Life	12 months From the date of manufacturing, when stored in dry conditions.

*Water should not be added at any point of time.

Application Instructions:

1. Open & stir the contents.
2. Apply with a roller.
3. Dry for 24 hrs. and the surface is now ready for plastering.

Packaging: 1kg, 5kg, 10kg & 20kg



Ceiling Products



Dry Wall Screw

Plaster of Paris is a very delicate material and regular screws and nails might damage the whole structure as they are not meant to use on it. That's why Trimurti manufactures special screws which are suitable and easy to use. It can be used to secure gypsum board to wood and are suitable to attach drywall to metal stud. Trimurti produces them in different sizes according to the need of the clients. Trimurti Dry Wall Screws are anti-corrosive, dimensionally accurate, smooth finish, and easy to fit.

- Supreme Quality
- Durable
- Easy Installation
- Anti-corrosive
- Dimensional Accuracy
- Sizes: 6x19mm | 6x25mm
- 1 Box: 1000pcs.

Gypsum Plaster/ Gypsum Board Channel

Our durable Gypsum Plaster / Gypsum Board channels are an ideal solution for the requirement of a false ceiling to decorate your home. These are ideal to maximize strength, are easy to use, sophisticated finish, and have a long-lasting ability.

- Fresh Raw Material
- High Strength
- Logo Engraved
- Material: Galvanized Iron
- ISI Certified Raw Material
- Standard Length and Weight
- Ultra Dotted Material
- Extra Gripping
- Rust Free
- Thickness: 24-28 Gauge
- Available in: 8ft, 12ft



Ceiling Products



Fastener

Trimurti Fastener demanded features like abrasion resistance and dimensional accuracy. These are tested on different parameters by our diligent quality controllers to ensure their robustness. They acquire sturdy construction, easy installation, lightweight, and durability.

- Abrasion Resistant
- Dimensional Accuracy
- Easy Installation
- Light Weight
- Size: 6mm
- 1 Box: 100pcs.

Wire Mesh

Trimurti Wire Mesh is a suitable solution to give a better hold to the gypsum plaster while making a false ceiling. It is certainly helpful to strengthen the plaster and reach your goal of getting a fashionable design.

- High Strength
- Less P.O.P. Consumption
- Without Cardboard
- All G.I.Prime Material Used
- Standard Weight
- Rust Free
- No Sagging
- Easy Installation

Specifications

- 1 Inches = 4 Boxes
- Wire Thickness: 0.54mm to 0.56mm
- Height: 3ft.
- Width: 25ft, 50ft, 75ft, 100ft
- Available in : 4kg, 8kg, 12kg, 16kg



Premium Wall Putty

Trimurti wall putty is a water-resistant white polymer-based putty that provides a strong base on concrete, mortar walls, and ceiling. It is suitable for both interior and exterior walls. We are the leading manufacturers of a wide range of Wall Putty products. We use Korean Polymers and high-quality white cement, which gives a longer life span and strengthens the wall. Also, it is highly resistant to water, so it increases the life of the paint as well.



Water Resistant



Interior & Exterior



Smooth Finish



Made with Korean Polymers

IS 17545 : 2021



CM/L-8600113612

General Specifications:

Water Demand	35-40%
Whiteness	90-92%
Compressive Strength (N/mm ²) (28 Days)	6-7
Tensile Adhesion Strength (N/mm ²) (14 Days)	0.75-1
Water Absorption (ml/hr)	0.7
Coating Thickness	1-1.5mm
Coverage (1kg)	15-18sq.ft. for 2 coats
Pot Life	2 - 3 Hours
Shelf Life	6 months

From the date of manufacturing, when stored in dry conditions.



Packaging : 1kg, 5kg, 20kg & 40kg

(*All tested results are under lab condition)

Superior Wall Putty

Trimurti has always made sure to improve its quality and bring to you the best performing wall care products such as Superior Wall Putty. Its anti-carbonate properties bind it strongly with the base and give a true tone to the colour. It is highly successful in interior walls, exterior walls, wall segments, and repainting of the walls. The supreme quality pigments give your walls a high-end snow-white finish. It is one tested solution to assure you with beautiful walls that fill the desire of your dream house.



Water Resistant



Enhance Adhesion



Smooth Finish



Prevent Flakings

IS 17545 : 2021



CM/L-8600113612

General Specifications:

Water Demand	35-40%
Whiteness	90-92%
Compressive Strength (N/mm ²) (28 days)	6-7
Tensile Adhesion Strength (N/mm ²) (14 days)	0.75-1
Water Absorption (ml/hr)	0.7
Coating Thickness	1-1.5 mm
Coverage (1kg)	15-18sq.ft. for 2 coats
Pot Life	2 - 3 Hours
Shelf Life	6 months

From the date of manufacturing, when stored in dry conditions.

Packaging : 20kg & 40kg



(*All tested results are under lab condition)

Expert Wall Putty

Expert Wall Putty is an advanced version of Trimurti Wall Putty. Trimurti Expert Wall Putty is a German polymer-based wall care product. It is specifically developed to give final finishing touches to the walls and ceilings in order to make them ready to paint. It covers unevenness and pinholes from the surfaces and makes them smooth. It is applied just before the final paint to increase the longevity and durability of the paint and provide a snow-white finish. Our Expert Wall Putty can be used for both exterior and interior finishing.



General Specifications:

Water Demand	35-40%
Whiteness	92-95%
Compressive Strength (N/mm ²) (28 Days)	7-8
Tensile Adhesion Strength (N/mm ²) (14 days)	1-1.5
Water Absorption (ml/hr)	0.6
Coating Thickness	1-1.5mm
Coverage (1kg)	18-20 sq. ft. for 2 coats
Pot Life	2 - 3 Hours
Shelf Life	6 months From the date of manufacturing, when stored in dry conditions.

Packaging : 20kg, 40kg

IS 17545 : 2021



CM/L-8600113612



**For Interior &
Exterior Walls**



**Made with German
polymers**



**No Curing
Required**



Silk Wall Putty

Trimurti Silk Wall Putty is specially designed with Micro Particle Technology that ensures a complete matrix to develop an extra smooth coat giving a flawless, pearl-like finish on the walls. Trimurti Silk Wall Putty gives a better finish to your walls. It provides high coverage to your walls and a strong base with unmatched whiteness and premium finish.



High-Coverage



Smooth Finish



Interior & Exterior Walls

General Specifications:

Whiteness	:	≥ 92.0
Water Demand	:	38.0-42.0
Pot Life (Min.)	:	Min. 120
Tensile Adhesion Strength @14 Days (N/mm ²)	:	>1.10
Water Absorption @14 Day in 30 Minutes (Ml)	:	≤0.5
Coverage (Sq.ft/Kg)	:	19-22 up to 1.5mm thickness in 2 coats.
Workability (Rating)	:	>4

Packaging : 20kg, 40kg

Areas of Application:

Cement based plaster/ Coarse Plaster
Concrete walls
Ceiling Surface
Dry walls
Interior Walls
Exterior Surface



Water Proof Wall Putty

Trimurti Waterproof Putty is premium quality white cement based putty which is moisture resistant and has some unique properties. Additionally it contains an active German silicone polymer that provides a strong base to the plaster or concrete and mortar wall surface before applying topcoat paint or distemper and it protects your walls from water. It is a ready to use and unique type of powder putty made from white cement, hydrophobic RD polymers, German active silicone polymers and graded fillers.



Water Resistance



Smooth & Glossy Finish



Whiteness & Workability


General Specifications:

Coverage (Square meter/kg) [On Ideal smooth surface]	: 1.48645 - 1.76516
Pot life (Hours)	: 3.0 - 3.5
Tensile Adhesion strength @28 days (N/m ²)	: ≥ 1.0
Water Capillary Absorption (ml), 30 min @28days	: ≤ 0.3
Drying Time	: 6-8 Hours to re-coat
Compressive strength @28 days (N/m ²)	: 3.5 - 7.5
Bulk Density (g/cm ³)	: 0.90 - 1.10

Areas of Application:

Interior walls
Exterior surfaces

Packaging : 20kg, 40kg

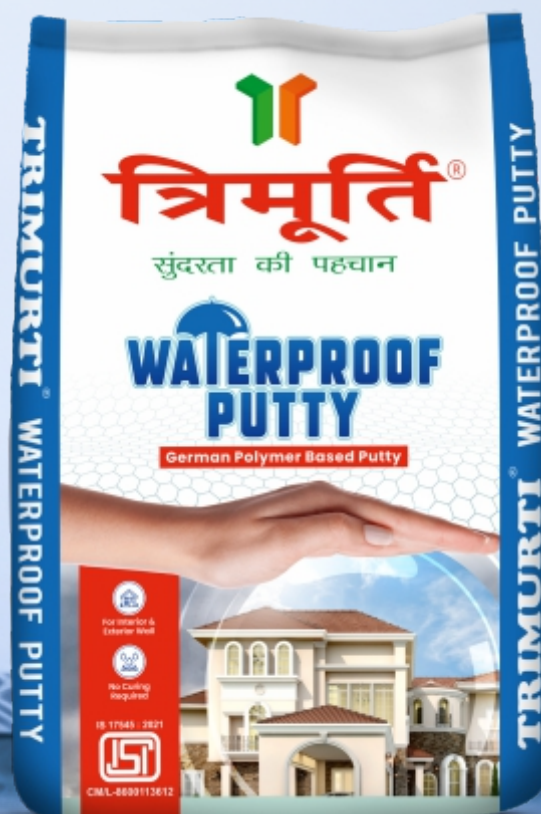

Decorative White Cement

Made with added polymers and white aggregates, Trimurti Decorative White Cement is highly applicable to interior and exterior walls to provide high bonding and extra whiteness to your walls. It can help you with placing suitable marbles and mixes easily with dry plaster and mortar. It can add a positive approach to a wide range of colors, textures, and shapes and can also be useful for decorative paints, ornaments, tiles, and terrazzo flooring. It is highly acceptable in making your walls resistant to external elements and provides a smooth base for the paints to put on for a premium finish.



Fills Crack



Enhance Adhesion



Interior & Exterior Walls

Areas of Application:

Floor

- Tiles manufacturing and block pavement.
- Suitable laying for marbles.
- Works for In-situ Terrazzo flooring technique.

Walls

- Dry mixing with plaster and mortar.
- Can pre-cast in panels.
- Excellent white wash.

Ornamental & Decorative Applications

- Glass fiber reinforced concrete.
- Garden showcase ornaments.

Features & Benefits:

- Best Class Limestone Used
- Superior Bonding
- Reinforce Application
- Smooth Matte Finish
- Extra Whiteness
- High Strength

Packaging : 1kg, 5kg & 25kg



Premium Grey Cement

Trimurti Premium Grey Cement is highly useful for small construction or repair work. Considering the demand of our customers, we introduce small bags of 1kg and 5kg of grey cement, as many times the big bags don't get used all and that wastes so much of material. The small packs will help you make good use of the product. While working on finishing the walls, you may require a small amount of grey cement and for that, the Trimurti Premium Grey Cement fits perfectly.

Features & Benefits:

- For Interior / Exterior Use
- Non-Toxic Grey Cement
- No Wastage
- Super Adhesion
- Easy to Apply



Water
Resistant



High
Strength



Super
Flexible



Environment
Friendly



Packaging : 1kg, 5kg

Tile Adhesive (Silver)

Tiles is an important part of any building, as it adds the beauty and charm to every room and ultimately to your home. Trimurti Tile Adhesive is highly polymer modified and highly flexible adhesive for the installation of vitrified, ceramic & porcelain tiles. Trimurti Tile Adhesive is a ready-made mixture made from 53 Grade OPC Cement, Korean and German Polymers and some additives added in it to improve its property for laying tiles. Trimurti Tile Adhesive is used for fixing tiles on walls, floors, swimming pools, etc. and it does not shrink or break due to moisture and temperature changes. It is used to prevent cracking and shedding of tiles. It is very easy to use a tile adhesive, as ready-made bags are available and only water is to be mixed. They are also used to repair or prevent water seepage under tiles.



Made with Korean & German Polymers



Made with 53 Grade OPC Cement



No Need To Add Cement



Fast Setting Time



Water Resistance



Quick Drying



TYPE
1

General Specifications:

Open Time	:	30-35 mins.
Pot Life	:	2-2.5 hrs.
Coverage (1kg)	:	1-1.5 sq. ft. with 8mm thickness
Tensile Strength	:	0.75 - 1 (N/mm ²)
Shelf Life	:	6 months From the date of manufacturing, when stored in dry conditions.

Area of Applications:

Interior Floor Tiles

- Any Size
- Any Base
- Any Thickness

Packaging : 20 Kg

Appearance : Grey

Type I

Tile Adhesive (Silver Plus)

Trimurti Silver Plus Tile Adhesive is a very specialized product specifically designed to meet the needs of floor & wall tile fixing solutions for your homes and offices. It can be used for interior walls and exterior floor tiles. It is made from Korean polymers which enhance its bonding and enhance its workability and maximize coverage.



Made with Korean & German Polymers



Made with 53 Grade OPC Cement



No Need To Add Cement



Fast Setting Time



Water Resistance



Quick Drying



General Specifications:

Open Time	:	30-35 mins.
Pot Life	:	2-2.5 hrs.
Coverage (1kg)	:	1-1.5 sq. ft. with 8mm thickness
Tensile Strength	:	0.75 - 1 (N/mm ²)
Shelf Life	:	6 months
From the date of manufacturing, when stored in dry conditions.		

Area of Applications:

Exterior Floor Tiles

Tiles on Tiles.

Tile Size 2 ft.*2 ft. to 2 ft.*4 ft. (Interior Wall Tiles) for Height up to 10 ft.

Any Thickness Any Base

Type II

Appearance : Grey & White

Packaging : 20 Kg

Tile Adhesive (Gold)

Trimurti Gold Series Tile Adhesive is formulated with high precision with selected pigments and special aggregates, the chosen product is perfect for different types of tiles like ceramic, vitrified and porcelain. It is a pre-mixed material which is very easy to use with joint filling properties. The sag-resistant feature solves your hesitation in choosing particular tiles without the fear of them falling down the wall.



No Need To Add Cement



Quick Drying



Fast Setting Time



Water Resistance

General Specifications:

Open Time	:	30-35 mins.
Pot Life	:	2-2.5 hrs.
Coverage (1kg)	:	1-1.5 sq. ft. with 8mm thickness
Tensile Strength	:	1-1.25 (N/mm ²)
Shelf Life	:	6 months

From the date of manufacturing, when stored in dry conditions.

Area of Applications:

Tile Size 2 ft.*2 ft. to 32 Inches* 64 Inches (Interior Wall Tiles) for Height up to 15 ft.
Any Thickness Any Base

Type II

Appearance : Grey

Packaging : 20 Kg



Tile Adhesive (Gold Plus)

Trimurti Gold Plus Series Tile Adhesive is formulated with high precision with selected pigments and special aggregates, the chosen product is perfect for different types of tiles like ceramic, vitrified and porcelain. It is a pre-mixed material which is very easy to use with joint filling properties. The sag-resistant feature solves your hesitation in choosing particular tiles without the fear of them falling down from the walls.



No Need To Add Cement



Quick Drying



Fast Setting Time



Water Resistance

General Specifications:

Open Time : 30-35 mins.
Pot Life : 2-2.5 hrs.
Coverage (1kg) : 1-1.5 sq. ft. with 8mm thickness

Tensile Strength : 1-1.25 (N/mm²)
Shelf Life : 6 months
From the date of manufacturing, when stored in dry conditions.

Area of Applications:

Tile Size 2 ft.*2 ft. to 32 Inches* 64 Inches (Exterior Wall Tiles) for Height up to 50 ft.
Any Thickness Any Base

Type III

Appearance : Grey & White

Packaging : 20 Kg



Tile Adhesive (Platinum)

Trimurti Platinum Series Tile Adhesive is the final touch of make over by putting modern tiles can be a sophisticated idea, for which our special tile adhesive formulation is applicable in different functionalities for all types of Ceramic, Vitrified, Glass Mosaic, Swimming Pool, and Porcelain tiles. It serves a great purpose of holding the tiles to the surface, be it on flat ground or a vertical wall, and affixes them firmly so that they never fall off. Providing excellent strength and bond for long life, our tile adhesive is ideal for wall tiling, tile over tile, floor and wall stones, swimming pool tiles, ceiling tiles, floor tiles and partition tiles - whether interior or useful externally.



High Bonding & Shear Strength



No Water Curing Needed



Longer Pot Life



Fast Setting



No Pre Soaking of Tiles



Water Resistant

General Specifications:

Open Time	:	30-35 mins.
Pot Life	:	2-2.5 hrs.
Coverage (1kg)	:	1-1.5 sq. ft. with 8mm thickness
Tensile Strength	:	1-1.25 (N/mm ²)
Shelf Life	:	6 months From the date of manufacturing, when stored in dry conditions.

Area of Applications:

Glass Mosaic Tiles.

Swimming Pool Tiles.

Tile Size 2 ft.* 2 ft. to 32 Inches* 64 Inches (Exterior Wall Tiles) for Height up to 50 ft.

Any Base Any Thickness

Packaging : 20 Kg

Appearance : White

Type III



Premium Unsanded Tile Grout

Trimurti Tile Grout is a high-performance joint filler is specially designed to provide a flawless finish for joint widths ranging from 1mm to 3mm, making it ideal for porous and absorbent tiles, non-vitreous clay tiles, marble, and glazed wall tiles.

This versatile product can be used for both interior and exterior applications. Its high-quality formula ensures that the color remains vibrant and consistent over time, providing a consistent and long-lasting joint that resists cracking, shrinking, and staining. It is available in a range of 30 colors, making it easy to match with any tile or design scheme.



Quick
Colour



Adds
Flexibility



Low Water
Absorption



More Compressive
Strength

General Specifications:

Powder Density	:	1.0 - 1.1 Kg/Litre
Pot Life	:	15 + 5 Minutes
Mix Density	:	2.35 - 2.45 Kg/L

Area of Applications:

For Grouting ceramic and vitrified tiles, Marbles, and natural stones.

For Interior and Exterior floor & walls.

Packaging : 1 Kg



Premium Tile Grout Admix

Trimurti Tile Grout Admix is a liquid polymer mixture intended to be mixed with Unsanded Grout to increase bond strength, flexibility, efficiency, durability and reduce the setting time of unsanded grout. It is used in place of water to improve the performance of unsanded grout.



Easy to clean



Higher Compressive Strength



Reduces Water Absorption



Improves Flexibility & Durability of Grout

General Specifications:

Pot Life	: 1 Hour
Time to Foot Traffic	: 24 Hours
Time to Heavy Traffic	: 72 Hours
Wet Density	: 1730 Kg/m ³

Area of Applications:

Used in Place of water in Grout.
For Interior & Exterior floor & wall joints.

Packaging : 200 ml & 400 ml

Grout Admix to Tile Grout Ratio = 400 ml : 1 kg



Epoxy Grout

Trimurti Epoxy Grout Resin Kit is a non-staining, three-component grout specially designed for application between ceramic tiles, vitrified tiles and stones that are prone to staining. Trimurti Epoxy Grout is available in 5 Kg and 1 Kg unit packing with a range of different vibrant colours.



Easy to apply &
Water Cleanable



Stain free &
Long Pot Life



Abrasion resistant
& Shrinkage free



High
Strength

General Specifications:

Pot Life	:	40-60 Minutes
Clean Ability Time	:	>80 Minutes
Resin Density	:	1.14 - 1.20 Kg/Litre
Hardener Density	:	0.93 - 0.98 Kg/Litre
Filler Powder Density	:	0.95 - 1.1 Kg/Litre
Flexural Strength	:	30 - 34 N/mm ²

Area of Applications:

Wet areas such as bathrooms, kitchens, sterilization rooms, swimming pools and restaurants.

Used for filling joints up to 12 mm between ceramic tiles, vitrified tiles and stones.

In industrial applications and high traffic areas.

Institutional areas such as cafeterias, schools, hospitals and theatres.

Packaging : 1 Kg & 5 Kg



Tile Cleaner

Trimurti Tile Cleaner is a rapid- action cleaner and stains remover for Ceramic, Vitrified, and Mosaic Tiles, Ceramic Wash Basins and Bath Tubs. It contains active ingredients such as hydrogen peroxide & citric acid, which help to break down and dissolve the dirt and grime on the tiles. This Tile Cleaner can be an effectively way to keep your tiles looking clean and fresh, but it is important to choose the right product for your specific needs and use it safely and correctly.



Ideal for
Interior & Exterior



Shine
Tiles



Removes
Stains



Low
Maintenance

General Specifications:

Appearance	:	Pale Red Liquid
Specific Gravity	:	1.04
pH	:	5-6
Shelf Life	:	2 years from manufacturing date

Area of Applications:

For interior and Exterior Cleaning applications of Tile Surfaces.

All Unglazed Ceramic Tile

Glass Tile

Vitrified Tile

Glass Mosaic Tile

Glazed Ceramic Tile

Porcelain Tile

Packaging : 500 ml & 1 Litre



Tile Spacer

Trimurti Tile Spacers are inserted between the tiles to create an even and uniform gap between them. The gap allows for grout to be applied, which helps to hold the tiles in place and prevents moisture from seeping between the tiles. It is a small plastic piece that is used during the installation of tiles to ensure consistent spacing between the tiles.



Uniform
Lines



Consistent
Spacing



Allows
Expansion



Prevents
Cracking

Area of Applications:

Enable the floor to have a straight and uniform grout distance.

Size : 2mm, 3mm, 4mm, 5mm, 6mm

Packaging : Pack of 100 N



Notch Trowel

Trimurti Notch Trowel is used for the installation of tiles. It is a hand held tool that is used to spread the adhesive onto a tile surface before laying it on the floor & wall. These notches are used to create ridges in the adhesive, which helps ensure a strong bond between the floor and the tile.



Better Adhesion of tiles



Spread Eventually on Surface



Time Saving




Less Consumption of Material

Area of Applications:

For Tile and Stone Fixing.

Sizes : 3mm, 4mm, 5mm, 6mm, 8MM, 10mm

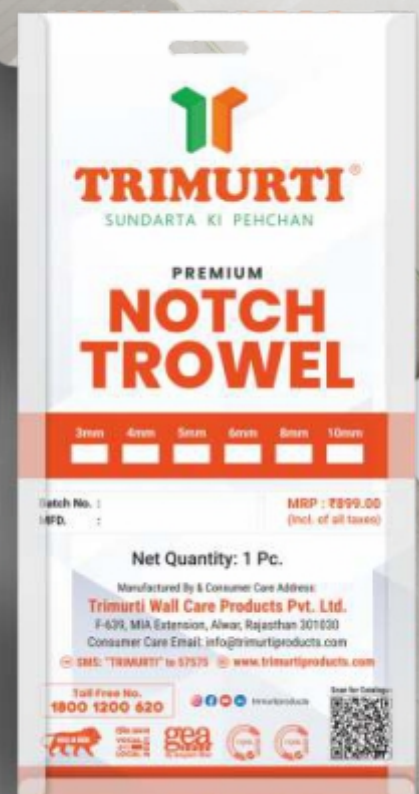

AAC Block Joining Mortar

Trimurti AAC Block Joining Mortar is a ready-to-mix, self-curing cementitious mortar for laying AAC, CLC, hollow and concrete blocks. It's a factory-made premixed mortar blended with carefully selected raw materials such as graded sand, mineral binders, and Ordinary Portland Cement (OPC) in combination with selected polymeric additives which help in providing mechanical bond and adhesion between the blocks and block to the surface. It is designed for use with water to produce high-strength thixotropic mortar.

Trimurti Block Joining Mortar is manufactured by following strict quality norms and is in compliance with C 1660-09 ASTM standards (www.astm.org), a worldwide standard followed for thin-bed mortar for autoclaved aerated concrete masonry that meets the requirements of National and International standards.



No
Curing



Strong
Bond



High-
Coverage



Non-Toxic


Key Features:

- High Strength (Tensile Splitting Strength)
- Self Curing
- Flexible & Improved Workability
- Less Storage Space
- Construction Accuracy
- Fast Construction & Higher Productivity

General Specifications:


Coverage (30kg) 1 Cubic Meter Blocks
with 3mm Thickness

Packaging : 30kg

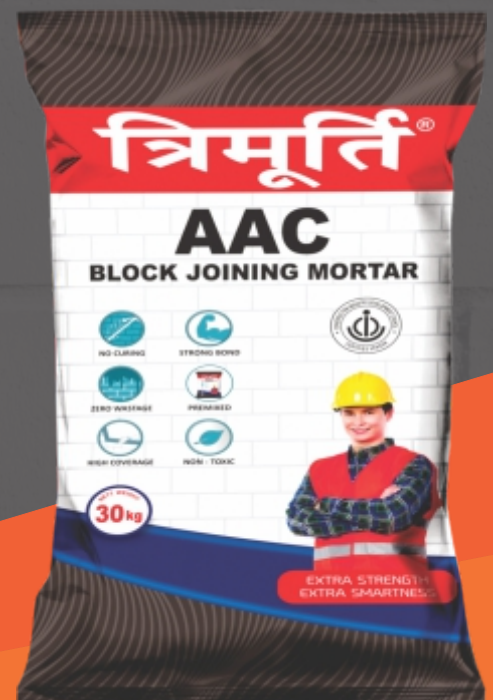

Our Clients

Our hard work and enthusiasm have taken us miles to work with so many ideal institutions and profiles that have given us a chance to explore a wide and long path together.

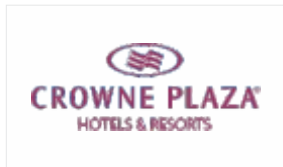

Our Presence

Trimurti has been a trusted name across the country. In order to become a pan-India brand, we strive to expand our reach and create better products.





TRIMURTI[®]
SUNDARTA KI PEHCHAN

Trimurti Wall Care Products Pvt. Ltd.

Works Office:

- F-110, Matsya Industrial Area,
Alwar, Rajasthan - 301030
- G-1/322, I.G.C. Khara, Bikaner,
Rajasthan-334601

Connect with us:

- ☎ 011-45556144
- ☎ 1800-1200-620
- ✉ info@trimurtiproducts.com

Scan for Catalogue



Follow us on:



/trimurtiproducts



www.trimurtiproducts.com