




## Dynamic pass box (Wall / Floor mounted)

It is used to transfer the materials-components between two classified areas and optimize man- material movement within clean room.

This is also known as ISO 5 / class A pass through chamber or hatch box.

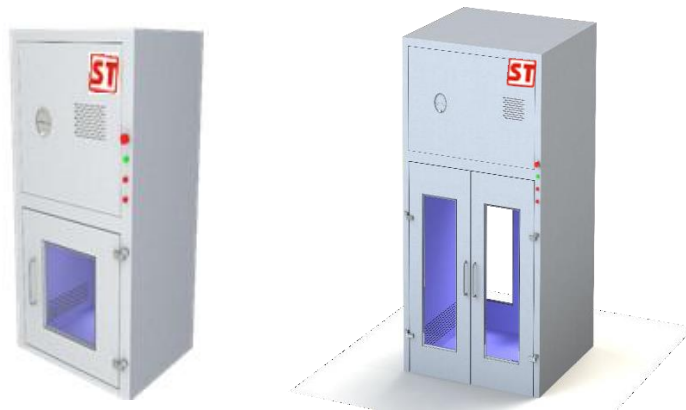

Model	Internal dimension (mm)			External dimension (mm)		
	W	D	H	W	D	H
A)Wall mounted						
ST-DPBWM-18X18	450	450	450	600	520	1270
ST-DPBWM-24X24	610	610	610	860	680	1430
ST-DPBWM-28X28	750	750	750	1000	820	1570
B)Floor Mounted						
ST- DPBWM-48X48	1220	1220	1220	1400	1290	2070
ST- DPBWM-60X60	1525	1525	1525	1705	1595	2395

Note: Customised dimensions as per requirement.



SQUARE TECHNOLOGIES

Plot No.-47,  
Krishna industrial Park  
Sanjan road,Umbergaon(396171)  
Dist-Valsad(nr.vapi), GJ

## **Features:**

- MOC: GI powder coated, SS304, SS316 and SS316L
- Doors: Doubled wall SS doors with flush glass view panel, SS hinges, handles
- Door interlocking: Mechanical or Electro-magnetic
- Bottom coved internal corners
- LED Light
- Electrical control system with push button and indicators

## **Optional Features:**

- Microprocessor based control system
- Flameproof execution
- Single piece tempered glass door
- Gasket for door
- U.V light with hour meter
- SS support stand with leveling pad for wall mounted system
- Roller or conveyer system

## **Performance:**

- Light intensity: 250-300 lux