### **HOW TO ORDER**



Our aim is to make ordering as quick, easy and convenient as possible. Our products are available via a comprehensive network of stockists throughout the UK. Ireland and the rest of the world.

Our Distributors hold stock of fast-moving items. If they do not have the specific item that you require, they can order it from us and we will deliver it promptly.

Finding your local Stockist is quick and easy, either visit www.sealey.co.uk or call us on the number shown below.



+91 9380647428

+91 8073843541



info@vandita-technovations.in



www.vandita-technovations.in

Our call centre is open between 8.30am to 5.30pm Monday to Friday. Calls are immediately passed to the first available operator without any complicated routing process. Our experienced, professional and friendly advisors can provide instant stock availability, pricing and technical information.

Our authorised stockists can order direct from us via telephone, email, fax or online using our B2B (Business to Business) website. Here, you can place your order at a time that suits you and view instant stock availability and pricing.

### **HUGE STOCKS & FAST DESPATCH**

We hold over £30million worth of stock. Modern, computer controlled warehousing enables, on average, 99.8% of our entire product range to be despatched straightaway.

Some items in our Catalogue are very heavy and extra assistance is recommended at the delivery point to help unload. Look out for this logo on products affected.



1	HAND TOOLS	14-264
2	JACKING & LIFTING	265-324
3	MOTORCYCLE TOOLS	325-353
4	BATTERY CHARGERS	354-377
5	VEHICLE SERVICE TOOLS	378-629
6	LUBRICATION	630-677
7	BODYSHOP	678-729
8	AIR POWER TOOLS	730-764
9	COMPRESSORS	765-796
10	WELDING & CUTTING	797-819
11	ELECTRIC POWER TOOLS	820-857
12	POWER TOOL ACCESSORIES	858-912
13	LIGHTING & POWER	913-953
14	STORAGE & WORKSTATIONS	954-1073
15	HEATING & COOLING	1074-1095
16	JANITORIAL, MATERIAI HANDLING & LEISURE	L 1096-1176
17	MACHINE SHOP	1177-1236
18	SAFETY PRODUCTS	1237-1264
19	CONSUMABLES	1265-1331
INDE	X - MODEL NO.	1332-1362
INDE	X - DESCRIPTIVE	1363-1370

## **BODYSHOP**

# SECTION 7

back to SECTION LIST



Air Accessory Kits

688 - 689

**Pulling Accessories** 

704 - 706

**Body Repair** 

707 - 708

**Riveters** 

722 - 726

**Caulking Guns** 

691

Sand/Shot Blasters

727 - 729

**Hazard Cabinets** 

709

Sanders & Polishers

700 - 701

Masking Paper Dispensers

698

**Spray Guns** 

679 - 687

**Metal Folders** 

721

Stands & Racks

694 - 697

**Panel Dryers** 

692 - 693

**Trolleys & Skates** 

702 - 703

**Panel Tools** 

710 - 720

Wax Injector Guns

690





### A On-Gun Air Pressure Regulator/Gauge Model No. ARO1

Maximum Pressure:	140psi
Maximum Flow:	18cfm @ 90psi



### **B** On-Gun Digital Pressure Regulator/Gauge Model No. ARD01

On/off button with adjustable auto-off function for extended battery life. Small and compact with composite body. Pressure can be displayed in psi, bar or MPa.

Maximum Pressure:	150psi/10bar/1MPa	
Maximum Flow:	18cfm @ 100psi	



## General Purpose Suction Feed Spray Gun 1.7mm Set-Up Model No. \$775

Ideal for automotive refinishing. Supplied with 1.7mm set-up. Fitted with air regulator control. Supplied with cam-action suction pot. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.7mm
Available Set-Ups:	1.5, 1.8, 2mm
Recommended Air Pressure:	30-70psi
Air Consumption:	12-15cfm
Pot Capacity:	900ml



## General Purpose Suction Feed Spray Gun 1.5mm Set-Up

Model No. SSG2

Ideal for applying base coats. Features adjustable paint flow and fan width controls. Supplied with aluminium screw-type suction feed pot. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.5mm
Available Set-Ups:	1.2, 1.8, 2, 2.2, 2.5mm
Recommended Air Pressure:	60psi
Air Consumption:	4cfm
Pot Capacity:	800ml



### F Workshop Gold Series Suction Feed Spray Gun 1.8mm Set-Up Model No. **\$701**

Spray gun with gold finish handle suitable for applying finishing coats. Supplied with cam-action suction pot. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.8mm
Available Set-Ups:	1.5, 2mm
Recommended Air Pressure:	30-70psi
Air Consumption:	7-12cfm
Pot Capacity:	900ml



### D General Purpose Suction Feed Spray Gun 1.5mm Set-Up

Model No. SSG401

Ideal for applying base coats. Features adjustable paint flow and fan width controls. Supplied with aluminium cam-action suction feed pot. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.5mm
Available Set-Ups:	1.2, 1.8, 2, 2.2, 2.5mm
Recommended Air Pressure:	50psi
Air Consumption:	5-11cfm
Pot Capacity:	1000ml



### **G** Workshop Series Suction Feed Spray Gun 1.8mm Set-Up

Model No. SSG1

Superbly balanced spray gun suitable for applying finishing coats. Supplied with cam action suction pot and fitted with air regulator control. Suitable for use with water based paints. Alternative set-up available separately.

Standard Set-Up:	1.8mm
Available Set-Up:	2mm
Recommended Air Pressure:	30-70psi
Air Consumption:	7-12cfm
Pot Capacity:	900ml





A - C General Purpose Suction Feed Spray Guns Model No. SEE BELOW

Suction feed spray guns, ideal for automotive refinishing. 2-Stage trigger control. Adjustable spray width and fluid flow. Maintenance tools supplied. Available in three standard set-up sizes; 1.7, 2 and 2.5mm, each finished in a different colour for easy identification. Supplied with 1000ml aluminium cup.

	A	B	C
Model No:	S717	S720	S725
Standard Set-Up:	1.7mm	2mm	2.5mm
Available Set-Ups:	2, 2.5mm	1.7, 2.5mm	1.7, 2mm
Recommended Air Pressure:	57psi	57psi	57psi
Air Consumption:	3-4cfm	3-4cfm	3-4cfm
Pot Capacity:	1000ml	1000ml	1000ml




### D - F General Purpose Gravity Feed Spray Guns Model No. SEE BELOW

Gravity feed spray guns, ideal for automotive refinishing. 2-Stage trigger control. Adjustable spray width and fluid flow. Maintenance tools supplied. Available in three standard set-up sizes; 1.3, 1.4 and 1.7mm, each finished in a different colour for easy identification.

	D	E	F
Model No:	S713G	S714G	S717G
Standard Set-Up:	1.3mm	1.4mm	1.7mm
Available Set-Ups:	1.4, 1.7mm	1.3, 1.7mm	1.3, 1.4mm
Recommended Air Pressure:	50psi	50psi	50psi
Air Consumption:	2.5-3.5cfm	2.5-3.5cfm	2.5-3.5cfm
Pot Capacity:	600ml	600ml	600ml













### A General Purpose Gravity Feed Touch-Up Spray Gun 1mm Set-Up Model No. S631

Ideal for blowing-in small areas of panel and detail refinishing where fine control of paint and air is necessary. Features air, fluid and spray pattern adjustment for full user control. Brass air cap with steel needle and nozzle.

Standard Set-Up:	1mm
Available Set-Up:	0.8mm
Recommended Air Pressure:	43psi
Air Consumption:	3-5cfm
Pot Capacity:	125ml



### D General Purpose Gravity Feed Spray Gun 1.3mm Set-Up

Model No. S775G

Gravity feed spray gun, ideal for automotive refinishing. 2-Stage trigger control. Adjustable spray width and fluid flow. Suitable for use with water based paints. Maintenance tools supplied. Alternative set-ups available separately.

Standard Set-Up:	1.3mm
Available Set-Ups:	1.5, 1.8, 2mm
Recommended Air Pressure:	30-70psi
Air Consumption:	12-15cfm
Pot Capacity:	600ml



### **B** General Purpose Gravity Feed Spray Gun 1.4mm Set-Up

Model No. S641G

Standard set-up and economy price make this spray gun ideal for applying various materials including adhesives, base coats and finishing coats. Round/flat fan control allows spray pattern to be adjusted for any job. Brass air cap with steel needle and nozzle.

Standard Set-Up:	1.4mm
Available Set-Ups:	1.7, 1.8, 2mm
Recommended Air Pressure:	45psi
Air Consumption:	4cfm
Pot Capacity:	600ml



Ideal for applying undercoats, primers and adhesives. Features adjustable paint flow and fan width controls. Supplied with composite gravity feed pot. Suitable for use with water based paints. Alternative set-ups available separately.

	E	F
Model No:	SSG501	SSG502
Standard Set-Up:	2.2mm	1.8mm
Available Set-Ups:	1.5, 1.8mm	1.5, 2.2mm
<b>Recommended Air Pressure:</b>	50psi	50psi
Air Consumption:	4.5-8cfm	4.5-8cfm
Pot Capacity:	600ml	600ml



### **C** General Purpose Gravity Feed Spray Gun 1.8mm Set-Up

Model No. S642G

Standard set-up and economy price make this spray gun ideal for applying various materials including adhesives, primers, base coats and finishing coats. Round/flat fan control allows spray pattern to be adjusted for any job. Brass air cap with steel needle and nozzle.

Standard Set-Up:	1.8mm
Available Set-Ups:	1.4, 1.7, 2mm
Recommended Air Pressure:	45psi
Air Consumption:	4cfm
Pot Capacity:	600ml



### G General Purpose Gravity Feed Spray Gun 1.4mm Set-Up

Model No. SG4

Ideal for applying base coats. Features adjustable paint flow and fan width controls. Supplied with spun aluminium gravity feed pot and comfortable composite gun handle. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:			1.4mm
Available Set-Ups:	1.2, 1.6	1.8, 2, 2.2, 2	2.5, 3mm
<b>Recommended Air Press</b>	sure:		50psi
Air Consumption:			12cfm
Pot Capacity:			600ml





### A Workshop Series Gravity Feed Spray Gun 2mm Set-Up

Model No. SSG5

Ideal for applying undercoats, primers and adhesives. Features adjustable paint flow, fan width and air regulator controls. Supplied with composite gravity feed pot. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	2mm
Available Set-Ups:	1.2, 1.4, 1.8mm
Recommended Air Pressure:	50psi
Air Consumption:	7-14cfm
Pot Capacity:	600ml



### D Workshop Series HVLP Gravity Feed Spray Gun 1.3mm Set-Up

Model No. HVLP741

Suitable for applying top coats. Round/flat fan control allows spray pattern to be adjusted for any job. Brass air cap with stainless steel needle and nozzle make this HVLP gun suitable for water based paint.

Standard Set-Up:	1.3mm
Available Set-Ups:	1.2, 1.4, 1.7, 2mm
Recommended Air Pressure:	43psi
Air Consumption:	15cfm
Pot Capacity:	600ml



### B Gold Series Gravity Feed Spray Gun 1.4mm Set-Up

Model No. S701G

Suitable for applying finishing coats. 2-Stage trigger control and 600ml plastic gravity feed pot. Adjustable spray width and fluid flow. Maintenance tools supplied. Suitable for use with water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.4mm
Available Set-Ups:	1.7, 2mm
Recommended Air Pressure:	43psi
Air Consumption:	16cfm
Pot Capacity:	600ml



### ■ Workshop Series HVLP Gravity Feed Spray Gun 2mm Set-Up

Model No. HVLP742

Ideal for applying high viscosity paints such as primer or undercoat. Round/flat fan control allows spray pattern to be adjusted for any job. Aluminium air cap with stainless steel needle and nozzle make this HVLP gun suitable for water based paint.

Standard Set-Up:	2mm
Available Set-Ups:	1.4, 1.7mm
Recommended Air Pressure:	43psi
Air Consumption:	15cfm
Pot Capacity:	600ml



## Workshop Series HVLP Gravity Feed Touch-Up Spray Gun 0.8mm Set-Up Model No. HVLP731

Ideal for blowing-in small areas of panel where fine control of paint and air is necessary. Brass air cap with stainless steel needle and nozzle make this HVLP gun suitable for water based paint.

Standard Set-Up:	0.8mm
Available Set-Up:	1mm
Air Pressure:	43psi
Air Consumption:	9cfm
Pot Capacity:	100ml



### Gun 1.7mm Set-Up


Model No. HVLP740

Round/flat fan control allows spray pattern to be adjusted for any job. 1.7mm Set-up is ideal for applying primers, undercoats and adhesives. Brass air cap with stainless steel needle and nozzle make this HVLP gun suitable for water based paint.

Standard Set-Up:	1.7mm
Available Set-Ups:	1.2, 1.3, 1.4, 2mm
Recommended Air Pressure:	43psi
Air Consumption:	16cfm
Pot Capacity:	800ml



















### A HVLP Gravity Feed Touch-Up Spray Gun 0.8mm Set-Up Model No. HVLP736

Professional gravity feed touch-up spray gun with 0.8mm set-up, ideal for small panels. Brass air cap with stainless steel needle and nozzle suitable for water based paints. Features air and paint flow controls for fine adjustment of spray pattern. Fully polished body resists corrosion and makes for easy cleaning. Alternative set-up available separately.

Standard Set-Up:	0.8mm
Available Set-Up:	1mm
Recommended Air Pressure:	29psi
Air Consumption:	9cfm
Pot Capacity:	125ml



### B HVLP Gravity Feed Spray Gun 1.3mm Set-Up Model No. HVLP746

Professional gravity feed spray gun with 1.3mm set-up, ideal for applying top coats. Brass air cap with stainless steel needle and nozzle suitable for water based paints. Features air and paint flow controls for fine adjustment of spray pattern. Fully polished body resists corrosion and makes for easy cleaning. Alternative set-ups available separately.

Standard Set-Up:	1.3mm
Available Set-Ups:	1.7, 2mm
Recommended Air Pressure:	29psi
Air Consumption:	15cfm
Pot Capacity:	600ml



### D HVLP Top Coat/Touch-Up Gravity Feed Spray Gun Set Model No. HVLP774

Professional gravity feed spray gun set comprising of Model No's HVLP736 and HVLP746. Brass air cap with stainless steel needle and nozzle suitable for water based paints. Fully polished body resists corrosion and makes for easy cleaning. Alternative set-ups available separately. See individual model specification for details.



### 1/4"BSP High Flow Air Tool Coupling Kit Model No. ACH60

Kit comprises male threaded coupling body together with male and female threaded adaptors. Fitted with 1/4"BSP threads. Suitable for most air tool applications. Free airflow rate at 100psi(7bar): 130cfm(3681L/min).

Thread Size:	1/4"BSP
Pack Quantity:	3pc Kit





### Half Mask Respirator with A2P3 Filters Model No. SSP1605

Twin cartridge half mask with low resistance exhalation valve for easy breathing. Fully adjustable 4-point suspension harness with quick release. Comfortable and durable thermoplastic rubber face mask offering a superior fit to most face shapes and conforms to EN140. Reflective strips for increased visibility in low light areas. Fitted with twin filters that confirm the correct fitting of the mask and conform to EN14387:2004+A1:2008. Ideal for a variety of painting, welding, construction and wood cutting tasks.

Replacement Filter Kit:	Description:
F SSP1605FP	Set of two A2P3 cartridges





Gravity feed spray gun designed for applying base coats. Features air and paint flow controls for fine adjustment of spray pattern. HVLP technology and precision engineering delivers consistent and unrivalled results. Suitable for water based paints.

Standard Set-Up:	1.3mm
Available Set-Ups:	1.4, 1.7mm
Recommended Air Pressure:	30-43psi
Air Consumption:	14.5cfm
Pot Capacity:	600ml



## D HVLP Gravity Feed Touch-Up Spray Gun 1mm Set-Up Model No. HVLP04

Professional gravity feed spray gun with 1mm set-up, ideal for blowing-in small areas of panel where fine control of paint and air is necessary. Features air and paint flow controls for fine adjustment of spray pattern. HVLP technology and precision engineering delivers consistent and unrivalled results. Brass air cap with stainless steel needle and nozzle suitable for water based paints. Alternative set-ups available separately.

Standard Set-Up:	1mm
Available Set-Up:	0.8mm
Recommended Air Pressure:	22psi
Air Consumption:	7cfm
Pot Capacity:	100ml



Gravity feed spray gun using standard pressure which creates a flat and smooth fan pattern ideal to get the best clear finishing coats. Air cap engineered to provide 26psi of mist pressure for fast application and extended working distance. Greater efficiency than HVLP and less material wastage than conventional spray guns. MVMP technology and precision engineering delivers consistent and unrivalled results. Features air and fluid flow controls for fine adjustment of spray pattern.

Standard Set-Up:	1.4mm
Available Set-Ups:	1.2, 1.3, 1.7, 1.8mm
Recommended Air Pressure:	30-43psi
Air Consumption:	10.6cfm
Pot Capacity:	600ml



### **E On-Gun Air Pressure Regulator/Gauge** Model No. **AR01**

On-Gun Air Pressure Regulator/Gauge. Just one of a comprehensive range of quality spray gun accessories.

Maximum Pressure:	140psi
Maximum Flow:	18cfm @ 90psi





### C LVLP Gravity Feed Spray Gun 1.4mm Set-Up Model No. LVLP01

Gravity feed spray gun designed for applying base coats. Features air and paint flow controls for fine adjustment of spray pattern. LVLP technology gives a superior finish with very low paint wastage. Suitable for water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.4mm
Available Set-Ups:	1.2, 1.3, 1.7, 1.8mm
Recommended Air Pressure:	17-22psi
Air Consumption:	9.5cfm
Pot Capacity:	600ml




### Gpc Hook-and-Loop Sanding Block Kit Model No. RE40KIT


Comprehensive kit of resilient rectangle style concave and convex sanding blocks with hook-and-loop surfaces and a flexible tear drop sanding block.

**Sizes:** Sanding Blocks; **RE4015** - Concave 85 x 155mm, **RE4016** - Convex 80 x 155mm, **RE4017** - Convex 85 x 160mm, **RE4019** - Flexible Tear Drop 90 x 135mm, **RE4020** - Concave 90 x 155mm, **RE4022** - Convex 90 x 150mm



















Pressure pot components compatible with Model No. SSG1P Pressure Feed Spray Gun Kit.



Based on the Model No. SSG1 spray gun head, and supplied with high capacity pressure pot with gauge. Suitable for bulk/production spraying. Suitable for use with water based paints. Components of this set are also available individually (see above). Alternative set-up available separately.

Contents:	Spray Gun Head, Supply Hoses, Pressure Pot
Standard Set-Up:	1.8mm
Available Set-Up:	2mm
Recommended Air Pressure:	40-60psi
Air Consumption:	7-12cfm
Pot Capacity:	21

### H- Spray Gun Cleaning Tanks Model No. SEE BELOW

Fully automatic operation - close lid to start and open lid to stop. Corrosion resistant tank suitable for containing water and detergent necessary for cleaning water based spray guns. Powerful and reliable piston pump system.

	н	
Model No:	SM24/1	SM23/2
Gun/Pot Capacity:	1/1	2/2
Width:	415mm	470mm
Depth:	468mm	572mm
Height:	1030mm	1300mm
Pump:	Pneumatic	Pneumatic
<b>Recommended Air Pressure:</b>	30-50psi	20-50psi
Air Consumption:	2-4cfm	2-4cfm



#### SAFETY EQUIPMENT

For our full range of Nitrile Gauntlets, Spectacles and Safety Equipment, see pages 1237 to 1264.



Individual components for use with HVLP-79/P Pressure Pot Spray Gun.

Model No:	Description
C HVLP-79/P1	Spray Gun Head
D HVLP-79/P2	1.37m Hose (x2
E HVLP-79/P3	2L Pressure Po
G  OK  FOR WATER  MASED PAINTS  GI HIVI P. Prossure Pot System  OF THE PROSSURE PART SYSTEM  OF THE PART SYSTEM  OF TH	HVLP
G HVLP Pressure Pot System with Spray Gun & Hoses 1.7m Model No. HVLP-79/P	n Set-Up

Fully polished metal gun body resists corrosion and has low affinity for paint, making this unit ideal for water based paints and easy to clean. Adjustable paint flow, fan width and air regulator controls. High capacity pressure pot holds up to 2L of paint. This unit is perfectly suited to the commercial refinishing shop. Components of this set are also available individually (see above). Alternative set-ups available separately.

Contents:	Spray Gun Head, Supply Hoses, Pressure Pot
Standard Set-Up:	1.7mm
Available Set-Ups:	1.3, 1.4, 1.5, 2mm
Recommended Air Pressure:	15-50psi
Air Consumption:	10cfm
Pot Capacity:	2L







#### A 5pc Spray Gun Cleaning Mini Brush Set Model No. **BSGC4**

Ideal for cleaning needles, nozzles and air caps from spray guns after use. Suitable for use with thinners and cleaning solvents.



### D 22pc Spray Gun Cleaning Set Model No. **BSGC5**

Comprehensive cleaning set with a range of soft, medium, hard and brass bristle brushes. Includes precision brush/probe sets and empty bottle for lubricant. Suitable for various applications. Supplied in storage case.

Contents: 95mm Mini Brushes (x6), Soft/Medium Brushes; 155, 210, 310mm (Angled), 155mm Brass Brush, 170mm Brush with 35mm Hard Bristles, Precision Brushes (x3) & Holder, Precision Probes (x6) & Holder, Lubricant



### G Paint Can Opener/Stirrer - Pack of 5 Model No. PA05

Carbon steel paint can opener with black plastic handle. Tool designed for the quick and easy opening of paint cans without damaging them. Easy-to-clean.



### **B** 3pc Spray Gun Cleaning Brush Set Model No. BSGC/3

Ideal for cleaning the inside and outside of spray guns after use. Suitable for use with thinners and cleaning solvents.



### Paint Dirt Removal Pen with Needle Set Model No. MK78

Aluminium pen with quick change needles. Designed to remove particles from wet paint and prevent bubbles

Contents: Aluminium Pen, Paint Dirt Removal Needle Set Consumable Parts: BSC01 - Paint Dirt Removal Needle Set - Pack of 10



Ideal tool for measuring correct ratios as well as stirring. Double side design has both 2:1 and 4:1 ratios. Stamped holes at top for convenient storage.



### C 20pc Spray Gun Cleaning Set Model No. BSGC2

Various sized brushes and probes suitable for many cleaning applications.

#### Contents:

Bristle Brushes; 115, 135 (Small), 200 (Medium), 200mm (Large), Soft Brushes; 150 (x2), 210mm, 180mm Brush with 45mm Soft-Fill, Wire Probe, Wooden Probe (x10), Needle Lubricant



### Paint Dirt Removal Needle Set Pack of 10

Model No. BSC01

Pack of 10 replacement needle sets for Model No. MK78.



### On-Gun Digital Pressure Regulator/Gauge Model No. ARD01

On/off button with adjustable auto-off function for extended battery life. Small and compact with composite body. Pressure can be displayed in psi, bar or MPa.

Maximum Pressure: 150psi/10bar/1MPa Maximum Flows 18cfm @ 100psi



















Heavy-duty 4.5kg capacity magnet will adhere to any ferrous surface. 50mm Wide steel hook with protective rubber coating. Suitable for use with most gravity fed spray guns.

Magnet Capacity:	4.5kg
Hook Width:	50mm



Heavy-duty triple gun stand, constructed from steel with painted finish. 60mm Wide hooks make this suitable for use with most gravity feed spray guns. Features an adjustable filter ring to make pot filling simpler.

Size (W x H):	220 x 360mm
Hook Width:	60mm



### **E** - **F** Paint Filters - Packs of 10 Model No. SEE BELOW

In-line suction pot and gravity cup filters.

• =	
Model No:	Type:
E ILF/PF10	Suction Feed
F ILF/GF10	Gravity Feed



### B Magnetic Spray Gun Holder - 2 Gun Model No. MSH02

Heavy-duty bracket with two large magnets which will adhere to any ferrous surface. Composite covered magnets prevent scratching of surface. Suitable for storing up to two spray guns.

Size (W x H): 200 x 118mm



### D Magnetic Spray Gun Holder - 2 Gun Model No. MSH03

Heavy-duty magnetic bracket with six large magnets which will adhere to any ferrous surface. Composite covered magnets and PVC bumper help prevent against damaging surface. Suitable for storing up to two spray guns. Features hose hanging holes.

Size (W x H): 200 x 120mm



### G In-Line Water Trap/Filter Model No. ILF/SE

Compact unit, ideal for fitting directly onto air inlet.



H On-Gun Pressure Regulator/Gauge Model No. ILF/RG

On-Gun Pressure Regulator/Gauge. Maximum pressure 160psi. Maximum flow 18cfm @ 90psi.







1L Alloy Paint Pot with Cam-Action Lid Model No. SC138

Aluminium Paint Pot with cam-action lid 1L.







### A Air Brush Kit Model No. AB931

Gravity fed air brush with composite body. Suitable for blowing-in small areas of panel. Kit includes gravity cup, propellant adaptor\*, 1.5m of small bore hose and 1/4" reduction nipple.

Working Pressure: 15-45psi

\*Propellant not included

C





### B Air Brush Kit Model No. AB932

Metal body with suction bottle or thimble feed options. Paint delivery controlled on single thumb screw. Supplied with 0.35mm nozzle. Includes two 22cc glass pots, one 5cc metal cup, 1.6m small-bore hose, 1/4" reduction nipple, spanner and hanging bracket.

 Working Pressure:
 15-50psi

 Nozzle Size:
 0.35mm



### C Gravity Feed Air Brush Kit

Model No. AB9321

Metal body construction with built-in gravity feed pot. Double-action trigger providing precision control of paint flow. Supplied fitted with 0.3mm nozzle. Includes alternative 0.2 and 0.5mm set-ups, 1.8m small-bore hose, adjustment spanner and pipette.

Working Pressure:	15-50psi
Nozzle Sizes:	0.2, 0.3, 0.5mm
Cup Capacity:	7cc



Quiet running piston pump, powered by a 122W electric motor - suitable for most air brushes. Requires no lubrication and the air supply from the unit is oil-free. Supplied with an air filter regulator and pressure gauge.

Power:	122W
Supply:	230V
Free Air Delivery:	0.8cfm
Maximum Air Pressure:	50psi
Outlet Thread:	1/8"BSP



Comprehensive mini air brush kit, including suction and gravity feed pots. Designed for detailed application. Double action trigger providing precision control of paint flow.

 Working Pressure:
 15-50psi

 Nozzle Sizes:
 0.2, 0.3, 0.4, 0.5mm

 Cup Capacity:
 7, 9, 22cc




















Metal tank with large diameter fluid aperture which aids filling and cleaning of tank. Suitable for applying degreasing and cleaning agents. Fitted with fluid/air control valve.

1/4"BSP Inlet Size:



### **B** 19pc Air Blow Gun Kit Model No. SA320K

Die-cast metal body with moulded handle and hanging point. Palm type gun with thumb trigger control. Supplied with jet and safety nozzle. Quick release coupling/adaptor kit and tyre pressure gauge. Ø1/4"(6mm) x 7m PE air hose with 1/4"BSP Male connectors. Maximum operating pressure 110psi.

Inlet Size: Ø1/4"(6mm) x 7m PE Air Hose with Contents: 1/4"BSP Male Connectors, Air Blow Gun, Female 1/4"BSP Quick Coupling (PCL) (x2), Blow Gun Attachment Adaptor, Blow Gun Safety Nozzle, 1/4"BSP Male/Male Adaptor, Blow Gun Nozzle, Roll of Teflon Tape, Tapered Blow Gun Nozzle, Inflating Needles (x2), 1/4"BSP Male Quick Connector (PCL) (x3), 1/4"BSP Female Quick Connector (PCL) (x2), 1/4"BSP Female/Female Adaptor, Tyre Pressure Gauge



### C 5pc Air Accessory Kit Model No. SA33/S

Air tools and accessories suitable for all leading makes of compressor. Includes suction feed spray gun with composite bayonet type pot lid, tyre inflator with gauge, paraffin/detergent spray gun, air blow gun and coiled air hose. Components are fitted with 1/4"BSP threaded unions. Also available individually, see below.

Kit Contains:	Model No:
1 Tyre Inflator with Gauge:	SA332
2 Paraffin Spray Gun:	SA333
3 Air Blow Gun:	SA334
4 PE Coiled Air Hose:	SA335
5 Suction Feed Spray Gun:	N/A



### E - H Air Accessories with Quick Release Couplings Model No. SEE BELOW

Air tools and accessories suitable for all leading makes of compressor. Tyre inflator with gauge, paraffin/detergent spray gun, air blow gun and coiled air hose all fitted with quick release air line couplings

Description:	Model No:
E Tyre Inflator with Gauge:	SA302
F Paraffin Spray Gun:	SA303
G Air Blow Gun:	SA304
H Coiled Air Hose:	SA305



Model No. SA33G Air tools and accessories suitable for all leading makes of compressor, includes gravity feed spray gun, tyre inflator with gauge, paraffin/detergent spray gun, air blow gun and coiled air hose. Components are fitted with 1/4"BSP threaded unions.



700W Electric motor provides continuous high volume of air for even paint coverage. Extendable handle and hose storage provides easy manoeuvrability. Suitable for interior and exterior use, applying water and oil based paints, lacquers, preservatives and stains.

Power:	700W
Maximum Air Pressure:	4.35psi
Voltage:	230V
Spray Gun Set-Up:	2.5mm
Pot Capacity:	800ml
Air Hose Length:	3m
Weight:	3kg





### Air Operated Underbody Coating Gun Model No. SG139

Accepts most popular types of 1L coating tins.

Recommended Air Pressure:	90psi
Air Consumption:	10cfm
Inlet Size:	1/4"BSP



### D Underbody Coating/Wax Injector Kit with Disposable Heads Model No. SG14D

Unique disposable head and pick-up tube assembly means that you never need to clean your gun again - just throw away the head and tube every time. Saves time and mess. Supplied with wax injector probe.

<b>sure:</b> 29-145psi
3.5-12.5cfm
1/4"BSPT
SG14D/ACC
Disposable Heads & Tubes (x6)



### **F** 600mm Extension Probe Model No. SG191

Rigid cavity probe suitable for use with Model No. SG19 Wax Injector Gun **G**.



### B Air Operated Underbody Coating Gun Model No. SG14

Accepts most popular types of 1L coating tins. Supplied with extended flexible nozzle for wax spraying cavities.

Recommended Air Pressure:	90ps
Air Consumption:	8cfm
Inlet Size:	// 1/4"BSP



### E Deluxe Air Operated Underbody Coating/Wax Injector Gun Model No. SG16

Features air control valve, making it suitable for various applications. Supplied with canister and wax injection probe.

	Recommended Air Pressure:	60-115psi
	Air Consumption:	10-13cfm
	Inlet Size:	1/4"BSP
	All	Mari
	CONTRACTOR OF THE PARTY OF THE	William.
	G	
	<u>u</u>	
١		
1		

### **G** Underseal Gun with Canister & Extension Probe Model No. SG19

Suitable for most brands of wax rust inhibitor. Supplied with nozzle for surface application and 910mm flexible probe for cavities.

Recommended Air Pressure:	87-145psi(6-10bar)
<b>Air Consumption without Extension</b>	13.4cfm
Air Consumption with Extension:	6.4cfm
Inlet Size:	1/4"BSP
F Optional Rigid Probe:	SG191



#### C Air Operated Underbody Coating Gun Model No. AK42

Fitted with regulator to obtain even deposit of coating. Accepts most popular types of 1L coating tins.

Recommended Air Pressure:	90psi
Air Consumption:	5cfm
Inlet Size:	1/4"BSP





#### H Air Operated Wax Injector Kit Model No. SG18

Designed for the application of wax rust inhibitor. Supplied with a selection of lances to enable the wax to be sprayed into body cavities through small access points.

Recommended Air Pressure:	70-80psi
Air Consumption:	15cfm
Inlet Size:	1/4"BSP













in Sealey Tools





### A 220mm Skeleton Type Caulking Gun Model No. AK39

Suitable for 310ml cartridges up to 220mm length.

Cartridge Length:	220mm
Overall Length:	330mm



## **E 260mm Skeleton Type Manual Caulking Gun**Model No. **AK3901**

Suitable for 310-380ml cartridges up to 260mm length. Hook end suitable for attaching to user's belt.

Cartridge Length:	260mm
Overall Length:	370mm



### H Applicator Nozzle Stopper - Pack of 4 Model No. AK391

Cut-to-size and insert into cartridge application nozzle. Airtight seal safeguards the sealant/adhesive from oxidization, reducing wastage.



### 220mm Heavy-Duty Caulking Gun Model No. AK4801

Suitable for 310ml cartridges up to 220mm length. Includes tip cutter within the handle. Tip piercer/cleaner for clearing sealant from dried nozzles. Hook end suitable for attaching to user's belt.

Cartridge Length:	220mm
Overall Length:	390mm



### B - D 230mm Caulking Guns Model No. SEE BELOW

Die-cast bodies with aluminium tubes. Supplied with plastic plunger and application nozzles. Suitable for sausage packs and cartridges.

	В	C	D
Model No:	AK3801	AK3801R	AK3801B
Cartridge/Sausa	ge		_
Pack Length:	230mm	230mm	230mm



### 330mm Caulking Gun Model No. AK3803

Die-cast body with aluminium tube. Supplied with plastic plunger and application nozzles. Suitable for sausage packs and cartridges.

Cartridge/Sausage Pack Length:	330mm
Overall Length:	360mm



### K 280mm Heavy-Duty Caulking Gun Model No. AK4803

Suitable for 310ml and 380ml cartridges up to 280mm length. Includes tip cutter within the handle. Tip piercer/ cleaner for clearing sealant from dried nozzles. No extra tools to look for or carry along. Hook end suitable for attaching to user's belt.

Cartridge Length:	280mm
Overall Length:	435mm



### **E 220mm Air Caulking Gun** Model No. **AK41**

Accepts standard 310ml cartridges. Fitted with trigger control for smooth application of caulking.

Recommended Air Pressure:	30-40psi
Air Consumption:	15cfm
Inlet Size:	1/4"BSP





### **G 220mm One-Hand Caulking Gun** Model No. **AK4804**

Suitable for 310ml cartridges up to 220mm in length. Efficient design, intelligently balanced to allow single-handed use while eliminating wrist strain. Product offers over 120kg of push force, makes handling higher viscosity materials an easy task. Hook end suitable for attaching to user's belt.

Cartridge Length:	220mm
Overall Length:	330mm





### A - C Plunger Cans Model No. SEE BELOW

Easy one-handed operation, these plunger cans are convenient and safe for dispensing flammable solvents. Spring mounted dasher delivers a controlled amount of liquid to swab/cloth. Perforated metal flash arrestor protects against ignition and escape of flammable vapours.

 Model No:
 Capacity:

 A PC1
 1L

 B PC19
 1.9L

 C PC38
 3.8L











### **D** Double Stand for Air Operated Panel Dryer Model No. SDAST

Stand will support one or two air panel dryers (Model No's SDA01 or SDA03), allowing operator more time for other tasks. Fully adjustable for height and dryer angle. Supplied with coiled air hoses and fittings.

Maximum Height:2300mmMinimum Height:Ground Level



### **E** Air Operated Panel Dryer Model No. SDA01

Designed for drying water based paints. Panel dryer operates on workshop air supply. Filter prevents airborne particles contaminating paint surface. Adjustable airflow to regulate as required. Ideal for localised or spot repair. May be handheld or mounted on optional Double Support Stand - Model No. SDAST D.

Inlet Size:		1/4"BSPT
Maximum Working Pr	essure:	90psi
Air Consumption:	10cfm @ 15p	si, 18cfm @ 90psi



## Air Operated Panel Dryer with Adjustable Airflow Model No. SDA03

Designed for drying water based paints. Lightweight, composite panel dryer operates on workshop air supply. Filter prevents airborne particles contaminating paint surface. Adjustable airflow to regulate as required. Ideal for localised or spot repair. May be handheld or mounted on optional Double Support Stand - Model No. SDAST (requires 2 x Model No. SA1/1414 - 1/4"BSPT Male to Male Adaptor).

Inlet Size:		1/4"BSP
Maximum Working Pro	essure:	90psi
Air Consumption:	7cfm @ 40psi,	15cfm @ 90psi



### **G** Upholstery/Body Cleaning Gun Model No. **BS101**

Designed for the car dealer and professional valeter, this essential tool cleans hard-to-reach areas such as seat runners, door trims, dashboards, upholstery and bodywork. Tornado action lifts dirt out of upholstery.

Air Pressure:	101-116psi(7-8bar)
Air Consumption:	6.35cfm
Inlet Size:	1/4"BSP

















A 3000W Infrared Panel Dryer - Short Wave Model No. IR3000

Three 1000W high output short wave lamps in three individually switched cassettes. Lamps emit short wave infrared heat ideal for optimising drying of water based paints. This flexible system allows each cassette to be adjusted and locked in position around the contours of the vehicle, ensuring maximum area coverage. Height adjustment is made using the locking gas strut, offering near weightless movement of the cassette support arm. Supplied with 5m power cable.

 Number of Elements:
 3

 Element Power:
 1000W

 Reflector Size:
 490 x 140mm

 Supply:
 230V



### **B** 1000W Handheld Infrared Panel Dryer Short Wave

### Model No. IR1000

Designed and developed to assist with any number of small drying processes. Ideal for spot repairs, engine drying, adhesive stripe removal, drying filler, drying primer or just preheating prior to spraying. May be used as a standalone system, when fitted to the 'slide and lock' bracket on the optional lightweight Floor Stand Model No. IR1000ST, or as a source of instant direct heat, when handheld. Fitted with a powerful 1000W short wave infrared lamp. Supplied with 3m power cable and 3-pin plug. Stand not included.

Number of Elements:	1
Element Power:	1000W
Reflector Size:	300 x 110mm
Supply:	230V



Converts a handheld heater into a freestanding panel dryer. Full height 'slide and lock' heater bracket. Ideal for use on small repairs and drying jobs, for example engine drying, stripe removal, filler drying, stone chip repairs and preheating prior to spraying. Easy assembly and designed to suit Model No. IR1000 Handheld Infrared Panel Dryer.

Maximum Lamp Height: 2150mm




### D Airbag Cabinet Model No. AP95

Mandatory safe storage for airbag and seat belt pre-tensioner charges. This cabinet is made from 2mm thick sheet steel and is fitted with a quality slam type lock. Keeps charges safe from theft or tampering. Can be wall mounted.

Size (W x D x H): 457 x 307 x 614mm



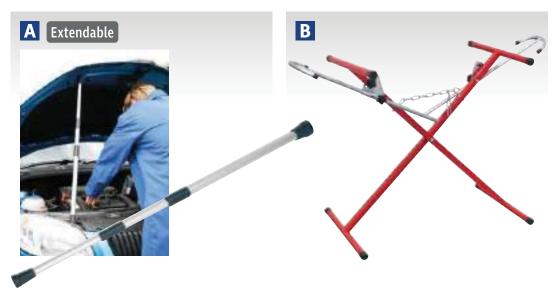

### A 1.2m Telescopic Bonnet/Tailgate Support Model No. VS0140

Three tier telescopic aluminium tailgate/bonnet support with tough rubber pads at each end. Lock in any position with a simple twist. Also suitable for holding open doors, depressing clutch, brake or accelerator pedals.

Length: 242-1200mm



### D 4-Level Bumper Rack Model No. **RE55**

Double-sided rack for safe and tidy workshop storage of most vehicle bumpers. Heavy-duty construction ideal for use in bodyshops. Four pairs of height adjustable support arms for maximum capacity and flexibility. Fitted with four castors, two with brakes, for manoeuvrability and safe positioning.

Width:	1170mm
Height:	2180mm
Arm Length:	520mm

### **B** Folding Bumper Stand Model No. MK54

Ideal for storage of bumpers prior to preparation and spraying. Adjustable stand width with extendable arms makes this unit suitable for holding various types and styles of bumpers. Folds away for easy storage.

Width Arms Closed:	890mm
Width Arms Fully Extended:	2000mm
Folded Height:	1140mm





### **E** Folding Panel Stand Model No. MK50

Versatile stand suitable for a wide variety of workshop and bodyshop applications. Work height is fully adjustable by lengthening chains. Foam cushioned supports help prevent marking of panel.

Width:	1000mm
Folded Height:	1100mm



### C Spray Booth Stand Model No. MK61

Ideal for holding small vehicle body parts such as grilles, spoilers, wings and mirror housings during preparation and spraying.

1105mm
740mm





### F Wall Mounting Folding Bumper Rack Model No. MK56

Suitable for holding up to three bumpers of various lengths for tidy workshop storage. Arms mountable in nine positions and safely fold away when not in use, saving space.

Support Height:	750mm
Arm Length:	640mm

















### Mobile Panel Storage Rack **Holds 5 Panels**

### Model No. MK76

Suitable for windscreens, sheet metals, bonnets and doors as well as other large items. Store up to five panels with a max capacity of 150kg. Rack includes 12 foam-cushioned support arms to protect the items held within it. Fitted with four castors, two with brakes, for maximum manoeuvrability and safe positioning.

630mn
700 x 635mn
150kg















### **B** Parts Cart with Panel Train Model No. MK75

Suitable for use with windscreens, sheet metal, bonnets and doors as well as other large items. Panel train includes eight foam-cushioned support arms to protect the items held within it. Fitted with four castors, two with brakes, for maximum manoeuvrability and safe positioning. Also includes shelves (x3), 600mm arms (x2), S-shaped hooks (x6).

Shelf Dimensions (W x D x H):	940 x 550 x 510mm
Size (W x D x H):	1400 x 800 x 1870mm
Maximum Capacity:	100kc



#### **Safety Gloves**

For our full range of Safety Gloves, see pages 1246 to 1249.

### Professional Car Parts Trolley Model No. MK70

Heavy-duty parts trolley for organised storage of car parts during repair. Equipped with hanging rack for bumpers and exhaust pipes. Also includes a parts shelf, writing board, small parts basket and elastic straps for securing larger items. Fully manoeuvrable on four castor wheels, two with brakes.

Size (W x D x H):	890 x 590 x 1700mm
Maximum Capacity:	90ka





### Alloy Wheel Painting/Repair Stand Single Wheel Capacity Model No. MK72

Fully adjustable supporting bars and cones for optimum height. Cone is angled for ease of use. Holds wheel up to 22". Supplied with 100mm PU wheels for moving the stand round the workshop or spray booth. Rotates the wheels on the cones so that each wheel can be painted completely.

Size (W x D x H): 800 x 800 x 1000mm



### D Universal Mobile Rotating Panel Stand Model No. MK73

Ideal for doors, bonnets, bumpers, wings and spoilers. Adjustable and rotating bars make this stand suitable for almost all panel types. Portable for easy manoeuvring of application from preparation to spray booth. Includes S hooks (x2), spray gun holder, vertical supports with fixed hooks (x4), supports with holes (x2).

Overall Length:	1240mm
Short Adjustable Bar Length:	400mm
Long Adjustable Bar Length:	700mm
Height (Without Bars):	950mm
Maximum Capacity:	60ka





### Alloy Wheel Painting/Repair Stand 4 Wheel Capacity Model No. MK71

Fully adjustable supporting bars and cones for optimum height. Cones are angled for ease of use. Holds four wheels. Supplied with 100mm PU wheels for moving the stand around the workshop or spray booth. Suitable for use on spray booth floors. Rotates the wheels on the cones so that each wheel can be painted completely.

Size (W x D x H): 1200 x 1200 x 1000mm





### B Alloy Wheel Repair/Painting Stand 4 Wheel Capacity Model No. MK74

safe positioning.

Will take four alloy wheels and enable the user to rotate the wheels on cones so the wheels can be repaired or painted without the need to lift and reposition them. Both supporting bars and cones have adjustable heights in order to provide the most comfortable position for the user. Fitted with four castors, two with brakes for maximum manoeuvrability and

Overall Length:	1285mm
Maximum Capacity:	100kg



### E Rotating Universal Panel Stand Model No. MK62

Suitable for supporting multiple panels and trims including wings, bumpers and spoilers. Eight adjustable bars and 360° rotation make this stand suitable for almost any panel types. Portable for easy manoeuvring of application from preparation to spray booth.


Overall Length:	1600mm
Short Adjustable Bar (x4):	450mm
Long Adjustable Bar (x4):	750mm
Height (Without Bars):	1070mm
Maximum Capacity:	90kg





















Compact design but handles the larger bonnets, tailgates etc. Ideal for doors, bonnets, bumpers, wings and spoilers. Fully adjustable, rotates full 180°. Adjustable and rotating bars make this stand suitable for almost all panel types. Portable for easy manoeuvring of application from preparation to spray booth.

Overall Arm Width:	1550mm
Base Dimensions (W x D):	900 x 710mm
Maximum Capacity:	40kg



### B Panel Stand - Door, Wing, Bonnet & Bumper Model No. MK51

Features fully adjustable arms to fit many styles of bonnets, wings, doors and bumpers. Main frame can adjust through 180°, to give required angle. Fitted with two fixed Ø180mm wheels and two braked Ø100mm castors for manoeuvrability.

Overall Arm Width: 890mm Base Dimensions (W x D): 850 x 900mm



### C Heavy-Duty Panel Stand - Door, Wing, Bonnet & Bumper Model No. MK59

Suitable for supporting large panels from cars or commercial vehicles. Features fully adjustable arms to fit many styles of bonnets, wings, doors, bumpers and tailgates. Each level can rotate 360° to suit. Fitted with two fixed Ø180mm wheels and two braked castors for manoeuvrability.

Maximum Arm Length:	1430mm
Maximum Height:	1600mm
Base Dimensions (W x D):	1150 x 700mm



### **D** Folding Windscreen Stand Model No. WK4

Lightweight tubular steel design with variable height facility. Large rubber suckers prevent screen from moving during preparation. Folding frame makes this ideal for both workshop and mobile screen preparation.

Width:	1000mm
Folded Height:	1200mm



### A Masking Paper Dispenser 1 x 450mm Roll Model No. MK65

Single roll dispenser accepts rolls up to 450mm and can be used floor standing or wall mounted. Automatically applies adhesive tape to edges of masking paper.

Capacity: 1 x 450mm Paper Roll

Note: Papers and tapes not included with any dispenser/trolley



### Masking Paper Dispenser Trolley 2 x 900mm Rolls Model No. MK67

Two roll dispenser accepts rolls up to 900mm and features storage tray underneath dispenser unit. Automatically applies adhesive tape to edges of masking paper.

Capacity: 2 x 900mm Paper Roll

Note: Papers and tapes not included with any dispenser/trolley



### Masking Paper Dispenser Trolley 2 x 450mm Rolls Model No. MK66

Two roll dispenser accepts rolls up to 450mm. Features a side tray and larger storage tray underneath dispenser unit. Automatically applies adhesive tape to edges of masking paper.

Capacity: 2 x 450mm Paper Roll

Note: Papers and tapes not included with any dispenser/trolley



### Masking Paper Dispenser Step-Up 1 x 450mm Roll Model No. MK64

Single roll dispenser accepts rolls up to 450mm. Features a step-up working platform. Automatically applies adhesive tape to edges of masking paper.

Capacity: 1 x 450mm Paper Roll

Note: Papers and tapes not included with any dispenser/trolley



Single roll dispenser accepts 900mm rolls and can be used either horizontally or vertically. Durable lightweight design with wheels for easy manoeuvrability.

Capacity: 1 x 900mm Paper Roll

Note: Papers and tapes not included with any dispenser/trolley






### F - G General Purpose Masking Tape Model No. SEE BELOW

Suitable for use up to 60°C.

Model No:	Width:	Length:
F MTG24P	24mm	50m
G MTG48P	48mm	50m





























### A 30W Lithium-Ion Rechargeable Plastic Welding Repair Kit Model No. SDL14

Cordless and lightweight welding iron. Inbuilt LED to illuminate welding area in low light areas such as engine bays. Kit includes plastic welding tip, plastic welding with pipe guide tip, hot staple tip, plastic welding rods in ABS/PP/PE/PS, reinforcing mesh (x3), 0.8mm flat staples (x50), 0.6mm flat staples (x50), USB charging lead and safety stand. Heats up to a maximum temperature of 500°C.

Battery:	2.4Ah Li-ion
Charging Time:	3.5hr
Maximum Temperature:	500°C
Operating Time:	40min
Power Rating:	30W



### Stainless Steel Wire Mesh - Pack of 2

Model No. **SDL14.M** 

Suitable for plastic repair.



### H-J 500ml Cutting Compounds/Super Polymer Polish Model No. SEE BELOW

Fine/medium cutting compounds will help to restore gloss and remove moderate swirl marks and fine scratches in all paintwork, without drying out or generating a large amount of polishing dust. Super polymer polish helps to protect and restore gloss paintwork. For use with dual action rotary polishers.

Model No:	Description:
H SCS700	Fine Cutting Compound
I SCS701	Medium Cutting Compound
J SCS702	Super Polymer Polish



### **B-D** Replacement Staples for RE023, RE024 & SDL14 - Packs of 100 Model No. SEE BELOW

Model No:	Type:	Size:	Quantity:
B RE06	U	0.6mm	100
C RE06V	V	0.6mm	100
D RE08	U	0.8mm	100

### E Plastic Welding Rods Packs of 5

#### Model No. SEE BELOW

Suitable for Model No SDL14 Plastic Welder.

Model No:	Description:
SDL14.ABS	ABS Plastic Welding Rods
SDL14.PP	PP Plastic Welding Rods
SDL14.PPF	PP Flat Plastic Welding Rods
SDL14.PE	PE Plastic Welding Rods
SDL14.PS	PS Plastic Welding Rods





### **G** Buffing & Polishing Foam Heads Model No. SEE BELOW

Premium foam buffing and polishing heads, colour-coded according to intended use. Made in UK for use with Sealey and other popular machines. Available with M14 x 2mm or 5/8"UNC threads (except Black, Yellow and Red foam - M14 x 2mm only).

PTC/CH/5/8-W Ø' Blue Foam - Medium density, all purpose fo Model No: PTC/CH/M14-B Ø'	Size:	5/8"UNC
PTC/CH/5/8-W Ø' Blue Foam - Medium density, all purpose fo Model No: PTC/CH/M14-B Ø'	150 x 50mm pam. Size:	
Blue Foam - Medium density, all purpose for Model No: PTC/CH/M14-B	oam. Size:	5/8"UNC
Model No: PTC/CH/M14-B	Size:	Throad
PTC/CH/M14-B Ø		Throad
		mreau:
PTC/CH/5/8-B Ø	150 x 50mm	M14 x 2mm
	150 x 50mm	5/8"UNC
Black Foam - Soft polishing foam. Ideal for	work on dark colour	S.
Model No:	Size:	Thread:
PTC/CH/M14-P Ø	150 x 50mm	M14 x 2mm
Yellow Foam - Coarse foam with open cell	for aggressive jobs.	Ideal for LV paint.
Model No:	Size:	Thread:
PTC/CH/M14-Y Ø	150 x 50mm	M14 x 2mm
Red Foam - Ultra soft foam for final finish. I	deal for car valeting.	
Model No:	Size:	Thread:
PTC/CH/M14-R Ø	150 x 50mm	M14 x 2mm





5mm Orbit designed specifically for use on car body repairs. 6-Stage variable speed control from 4000-10000rpm. Ergonomic rubberised gear head casing for added comfort and grip during use. Fitted with 5m mains cable. Supplied with Ø150mm hook-and-loop backing pad, spare brushes and hex key.

Motor Power:	400W
Supply:	230V
No-Load Speed:	4000-10000rpm
Thread Size:	M8
Orbit Size:	Ø5mm
Pad Size:	Ø150mm



#### Ø150mm Orbital Polisher 750W/230V Model No. OP750

21mm Orbit specifically designed for use in the bodyshop. 6-Stage variable speed control ranging from 2000-4500rpm. Vibration reducing motor and rubberised gear head cover allow for greater comfort and reduce user fatigue. Soft start for greater control. Speed stabilizer to ensure constant speed output. Fitted with 5m mains cable. Supplied with Ø150mm backing pad, two Ø180mm foam polishing pads, side handle, wrench and spare brushes.

Motor Power:	750W
Supply:	230V
No-Load Speed:	2000-4500rpm
Thread Size:	M8
Orbit Size:	Ø21mm
Pad Size:	Ø150mm
Noise Power/Pressure:	91/80dB(A)
Vibration/Uncertainty:	9.6/1.5 m/s <sup>2</sup>



### **B** Ø150mm Random Orbital Electric Sander 600W/230V Model No. **OS600**

9mm Orbit designed specifically for use on car body repairs. 6-Stage variable speed control from 3200-7200rpm. Ergonomic rubberised gear head casing for added comfort and grip during use. Fitted with 5m mains cable. Supplied with Ø150mm hook-and-loop backing pad, side handle, spare brushes and hex key.

Motor Power:	600W
Supply:	230V
No-Load Speed:	3200-7200rpm
Thread Size:	M8
Orbit Size:	Ø9mm
Pad Size:	Ø150mm



### **D** Ø150mm Rotary Polisher 1050W/230V Model No. RP1500

Powerful 1050W motor enclosed in a heavy-duty composite housing. 6-Stage variable speed control from 700-2500rpm. Soft start for greater control. Spindle lock for fast and easy pad changes. Double-torque gearing system. Fitted with 5m mains cable. Supplied with Ø150mm backing pad, side handle, wrench and spare brushes.

Motor Power:	1050W
Supply:	230V
No-Load Speed:	700-2500rpm
Thread Size:	M14
Pad Size:	Ø150mm



### Spot Polisher Kit 600W/230V Model No. SPK600

Rotary spot polisher kit designed for spot polishing. Ergonomic slim body design. 6-Stage variable speed control from 700-2500rpm. Spindle lock for easy pad and shaft changes. Soft start for greater control. Fitted with 5m mains cable. Supplied with full spot polishing kit, side handle and spare brushes.


Motor Power:	600W
Supply:	230V
No-Load Speed:	700-2500rpm
Thread Size:	M14
Pad Size:	1-3"
Cable Length:	5m
Weight:	2.58kg



















### A Air Needle Scaler - Pistol Type Model No. SA50

Pistol type scaler suitable for cleaning heavy paint and rust scale from metal surfaces. Removable needle head allows use as a standard air hammer but requires additional chisel set and spring retainer (not included). Features variable speed trigger control. Spring retainer and needle sets available separately.

Stroke:	43mm
No-Load Speed:	4500bpm
Air Consumption:	4cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Weight:	1.98kg
Noise Power/Pressure:	111/100dB(A)
Vibration/Uncertainty:	13/5.2m/s <sup>2</sup>
Replacement Needle Set (19pc):	SA50.02
Optional Spring Retainer:	SA11R/17

### D Ø150mm Dust-Free Air Palm Orbital Sander Model No. SA09

Polycarbonate outer housing with soft rubber handgrip reduces chill and vibration. Fitted with dual bearings in eccentric assembly to maximize working life. Exhaust muffler helps reduce noise emission. Features dust-free outlet for use with centralised dust extraction systems. Supplied with Ø150mm hook-and-loop pad.

	-
Pad Size:	Ø150mm
No-Load Speed:	10000rpm
Orbit Size:	Ø5mm
Air Consumption:	13cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Vacuum Outlet:	Ø28mm
Weight:	1kg
Noise Power/Pressure:	92/81dB(A)
Vibration/Uncertainty:	5.7/0.54m/s <sup>2</sup>



### B Ø75mm Mini Air Polisher Model No. GSA722

Textured grip and lightweight aluminium alloy housing provide comfort and control. Powerful air motor provides smooth operation under load. Supplied with Ø75mm hook-and-loop pad and spanner. Use with Ø79mm buffing and polishing heads.

Pad Size:	Ø75mm
Thread Size:	M6 x 1mm
No-Load Speed:	2500rpm
Air Consumption:	4cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Weight:	0.7kg
Noise Power/Pressure:	94/83dB(A)
Vibration/Uncertainty:	4.13/0.90m/s <sup>2</sup>



### Dust-Free Sanding Kit Model No. DFSK01

Package includes:

DFS35M - 35L Dust-Free Wet & Dry Industrial Vacuum Cleaner Plastic Drum Class M Filtration Self-Clean

GSA05 - Ø150mm Dust-Free Air Palm Random Orbital Sander

RE4011 - 70 x 120mm Dust-Free Sanding Block RE4012 - 70 x 198mm Dust-Free Sanding Block





165 x 90mm

### Air Operated Flat Bed Sander Model No. SA22

Orbital flat bed sander with counter-balanced drive shaft for smooth operation. Palm type trigger with rubber head ring allows comfortable, one-handed operation. Suitable for sanding body panels, wood, metals and plastics, this tool is suitable for 115mm roll papers and uses strong spring clips to attach them to the base plate.

Pad Size:	165 x 90mm
Orbit Size:	Ø5mm
No-Load Speed:	8000rpm
Air Consumption:	13cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Weight:	1.88kg
Noise Power/Pressure:	93/82dB(A)
Vibration/Uncertainty:	16.5/6.6m/s <sup>2</sup>



400 x 70mm

### Air Sander Twin Piston In-line Model No. SA32

Twin piston configuration powers base plate on both forward and backward strokes, whilst also reducing vibration for comfortable operation. Well balanced aluminium housing and base plate. Accepts 115mm papers or sheets and is suitable for heavy bodyshop use.

Pad Size:	400 x 70mm
Stroke:	25mm
No-Load Speed:	2400spm
Air Consumption:	8cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Weight:	3kg
Noise Power/Pressure:	107/96dB(A)
Vibration/Uncertainty:	8.47/3.38m/s <sup>2</sup>





### A 2tonne Adjustable Transportacar Trolley Model No. RE901

Heavy-duty steel frame suitable for supporting partly dismantled or badly damaged vehicles. Enables easy movement around bodyshop. The supports are interchangeable between V-crutches and sill clamps. Supports and clamps adjustable for height and overall width. Fitted with four Ø125mm nylon castors, two of which lock.

Using with Crutches:	
Minimum Height:	250mm
Maximum Height:	310mm
Using with Sill Clamps:	
Minimum Height:	330mm
Maximum Height:	390mm
Minimum Width*:	1035mm
Maximum Width*:	1430mm
Capacity:	2tonne
Closed Length:	600mm
*NI -t - Wilde I b -t	

<sup>\*</sup>Note: Widths measured between centres of jacking point.



### © 900kg Adjustable 2 Post Vehicle Moving Dolly Model No. VMD001


Heavy-duty steel frame suitable for supporting partly dismantled or badly damaged vehicles. Enables easy movement around workshop or bodyshop. Crutch supports adjustable for height and overall width. Fitted with four Ø90mm locking metal castors.

Minimum Height:	315mm
Maximum Height:	495mm
Increments:	4 x 45mm
Minimum Support Width:	350mm
Maximum Support Width:	1450mm
Width:	1500mm
Capacity:	900kg







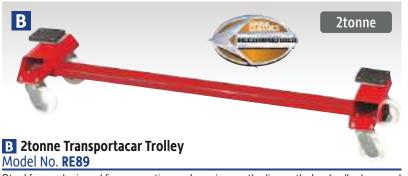

Steel frame designed for supporting and moving partly dismantled or badly damaged vehicles around the workshop or bodyshop. Sliding castor brackets adjust for width and rubber-faced support pads adjust for height.

Minimum/Maximum Height:	300/390mm
Maximum Width:	1485mm
Capacity:	2tonne
Castor Diameter:	Ø150mm



### **D** 900kg Adjustable 4 Post Vehicle Moving Dolly Model No. VMD002

Heavy-duty steel frame suitable for supporting partly dismantled or badly damaged vehicles. Enables easy movement around workshop or bodyshop. Adjustable frame allows you to change the length and width as required. Three types of height adjustable and interchangeable supports, rubber support pads, shallow and deep crutches. Fitted with four Ø200mm nylon locking castors.

Minimum Height:	400mm
Maximum Height:	520mm
Minimum Width:	680mm
Maximum Width:	1280mm
Minimum Length:	1150mm
Maximum Length:	1750mm
Capacity	900kg



















### A 3tonne Trolley Jack with Super Rocket Lift Model No. 3015CXD

Single-piece hydraulic unit with heavy base design and large jacking saddle. Twin piston Super Rocket Lift feature brings lifting arm straight into contact with the jacking point in 1-2 strokes. Universal joint release mechanism allows safer, more controlled lowering of the jack. Fitted with safety overload valve and pump-through valve. For full specification see page 270.

### **D** 570kg Wheel Skate Model No. WS570

Steel chassis with pedal operated mechanical lifting action. Skate sits on easy-rolling Ø100mm nylon castor wheels. Composite rollers cradle vehicle's tyre and are capable of handling up to 240mm profiles. Suitable for bodyshops, garages, showrooms or anywhere an immobile vehicle needs moving on an even surface.

Note: Skates sold as singles, but must be used in pairs.

Capacity:	570kg
Maximum Opening:	620mm
Maximum Tyre Profile:	240mm
Castor Diameter:	Ø100mm
Weight:	17.5kg



### **E** 650kg Hydraulic Wheel Skate Model No. WS650

Steel chassis with PVC rollers and four Ø100mm nylon castors. Pedal operated hydraulic lifting action with safety locking pin when under load. Rollers cradle vehicle's tyre and are capable of handling up to 270mm in width. Suitable for bodyshops, garages, showrooms or anywhere an immobile vehicle needs moving on an even surface. Note: Skates sold as singles, but must be used in pairs.

Capacity:	650kg
Maximum Opening:	550mm
Maximum Tyre Profile:	270mm
Castor Diameter:	Ø100mm
Weight:	17kg



### **B** 454kg Wheel Dolly Set Model No. WS454

Pressed steel wheel dolly with four Ø90mm metal castors. Can handle up to 355mm profiles. Suitable for use in bodyshops and workshops.

Capacity Each:	454kg
Maximum Tyre Profile:	355mm
Castor Diameter:	Ø90mm
Weight Each:	9kg





### **F** 680kg Hydraulic Wheel Skate Model No. WS680

Steel tube chassis with four Ø100mm nylon castors. Pedal operated hydraulic lifting action with safety locking pin when under load. Aluminium rollers cradle vehicle's tyre and are capable of handling up to 240mm profile. Suitable for bodyshops, garages, showrooms or anywhere an immobile vehicle needs moving on an even surface.

Note: Skates sold as singles, but must be used in pairs.

Capacity:	680kg
Maximum Opening:	540mm
Maximum Tyre Profile:	240mm
Castor Diameter:	Ø100mm
Weight:	17kg

### 680kg Wheel Dolly Set Model No. WS681

Heavy-duty steel plate with rust resistant finish. Fitted with four Ø75mm metal castors, two lockable. Each dolly features a side handle for easy carrying. Can handle up to 250mm profiles. Suitable for use in bodyshops and workshops.

Capacity Each:	680kg
Maximum Tyre Profile:	250mm
Castor Diameter:	Ø75mm
Weight Each:	7.6kg





### G Folding Mechanic's Work Mat Model No. VS858

Flexible work mat with two handles making it very portable. Durable composite cover that resists stains and fluids. High-density padding for added comfort. Ideal for working on cold garage floors and for roadside repairs.

Folded Size (L x W x D):	610 x 444 x 76mm
Unfolded Size (L x W x D):	1220 x 444 x 38mm









### A - B Pull Rams Model No. SEE BELOW

Spring-return pull rams, suitable for use with manual or air powered hydraulic pumps. Supplied with two chain hooks.

	Α	В
Model No:	RE91/05	RE91/10
Capacity:	5tonne	10tonne
Closed/Open Height:	530/660mm	350/500mm
Return Spring:	<b>✓</b>	<b>✓</b>



Suitable for many applications including workshop, agricultural, industrial, and construction where pulling, positioning, bending and holding of heavy loads may be required. Use in conjunction with manual or air powered hydraulic pumps.

	C	ט
Model No:	RE97XM02	RE97XM05
Capacity:	2tonne	5tonne
Closed/Open Height:	422/550mm	520/650mm
Return Spring:	<b>✓</b>	<b>✓</b>



2tonne Hook (female thread) for Model No. RE97XM02.




Wedge Ram Model No. **RE97.10-A13** 

500kg Capacity wedge ram for prying damaged body panels apart from one another. Use in conjunction with manual or air powered hydraulic pumps.



Suitable for many applications including workshop, agricultural, industrial, and construction where lifting, pushing, positioning, bending and holding of heavy loads may be required. Use in conjunction with manual or air powered hydraulic pumps.

	G	H		J	K
Model No:	RE97XC02	RE97XC10	RE97XM04	RE97XM10	610/41
Capacity:	2tonne	10tonne	4tonne	10tonne	10tonne
Closed/Open Height:	139/240mm	132/189mm	275/405mm	350/500mm	305/465mm
Return Spring:	×	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>

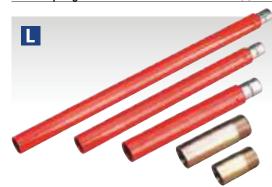

#### SuperSnap® Tube Extensions & Adaptors Model No. SEE BELOW

Extension tubes and adaptors for Model No. RE97/10 and other hydraulic body repair kits.

Model No:	Type:	Size:
610/A2	Extension	560mm
610/A3	Extension	480mm
610/A4	Extension	280mm
610/A5	Tube Adaptor	125mm
610/A6	Tube Adaptor	75mm



### M 10tonne Snap Push Ram with Pump & Hose Assembly Model No. RE97.10-COMBO

Package includes:


Model No:	Description
RE97.10-03	Hose Assembly
RE97.10-02	10tonne Push Ram
RE97.10-01	10tonne Hydraulic Pump



### N 10tonne SuperSnap® Push Ram with Pump & Hose Assembly Model No. 610/45

Package includes:

Model No:	Description
RE97.10-03	Hose Assembly
610/41	10tonne Push Ram
610/40	10tonne Hydraulic Pump



















Extremely short closed height makes these rams suitable for use where there is almost no clearance at the lift point. Suitable for use with Sealey Hydraulic Repair Kits and other brands.

	A	В	C	D	E
Model No:	RE97XC04	RE97XS05	RE97XS10	RE97XS20	RE97XS30
Type:	Push Ram				
Capacity:	4tonne	5tonne	10tonne	20tonne	30tonne
Closed/Open Height:	42/58mm	33/39mm	43/54mm	52/63mm	59/71mm







### F - G 10tonne Pump & Hose Assemblies Model No. SEE BELOW

Suitable for use with most leading brand hydraulic ram repair kits.

	F	G
Model No:	610/40	RE97.10-01
Capacity:	10tonne	10tonne
Outlet Thread:	1/4"BSP	1/4"BSP



### Hose Assembly Model No. **RE97.10-03**

Hose assembly for use with Sealey Body Repair Kits and Model No. TC966 Hydraulic Bead Breaker.

Inlet Thread:	1/4"BSPT
Length:	1540mm

### H Specialist Push & Pull Ram Set Model No. **RE97XCKIT**

Comprehensive set of mini, midi and maxi sized push and pull rams. Suitable for many applications including workshop, agricultural, industrial and construction where lifting, pushing, positioning, bending and holding of heavy loads may be required. Supplied in steel storage case. Use in conjunction with Hydraulic Pump and Hose (not included).

- ✓ High flow quick connecting couplers with dust caps on all components.
- ✓ Unique ram and cylinder bearings absorb eccentric load stress in order to protect the cylinder against abrasion, over-extension and jamming.
- ✓ Chromed rams with polyurethane seals and wipers provide longer service life.
- Selected rams fitted with heavy-duty return spring.

Contents:			
Ram Model No:	Capacity/Type:	Closed/Open Height:	Return Spring:
RE97XC02	2tonne/Push	139/240mm	X
RE97XC04	4tonne/Push	42/58mm	X
RE97XM04	4tonne/Push	275/405mm	<b>✓</b>
RE97XC10	10tonne/Push	132/189mm	<b>✓</b>
RE97XM10	10tonne/Push	350/500mm	<b>✓</b>
RE97XM02	2tonne/Pull	422/550mm	<u> </u>
RE97XM05	5tonne/Pull	520/650mm	<b>✓</b>
Hooks Model No:	Type:		Application:
RE97XM02.H-F	Female		RE97XM02
RE97XM02.H-M	Male		RE97XM02
RE97XM05.H-F	Female		RE97XM05
RE97XM05.H-M	Male		RE97XM05





### A 90° Dual Pull Clamp Model No. RE92/12

Suitable for use with body repair kits and chassis straighteners.

Capacity: 4tonne



Suitable for reaching over wide obstructions. Ideal for inside boot recesses. Reduces marking due to chains. Supplied with two sizes of feet and adaptor for SuperSnap® screw-on accessories and heads.

G 1.5tonne

#### G 1.5tonne Wheel Arch Puller Short Pattern Model No. RE99/10

Suitable for wheel arches and other small/lightweight pulls including those around light clusters.



#### 1.5tonne Wheel Arch Puller Model No. RE99/09

Suitable for wheel arches and other small/lightweight pulls including those around light clusters.

Capacity:	1.5tonne
Length:	320mm



### **B** 100mm Pull Clamp & Rotating Ring Model No. RE92/20

Suitable for use with body repair kits and chassis straighteners.

Capacity: 6tonne



### **E 220mm 2-Direction Pull Clamp** Model No. **RE93**

Suitable for use with body repair kits and chassis straighteners.

5tonne
2tonne
45mm



### H 245mm 2-Direction Box Pull Clamp Model No. RE95

Capacity (Straight Pull):

Suitable for use with body repair kits and chassis straighteners.

Capacity (Cross Pull):	2tonne
Jaw Width:	35mm
	200
K	2
	1

### K Door Restraining Bars - Pack of 2 Model No. DR66

Manufactured with steel tube and heavy jaw assemblies. Designed to triangulate and strengthen door apertures whilst performing pulling operations. Supplied with tommy bar.

Minimum Length:	830mm
Maximum Length:	1160mm
Jaw Width:	90mm



### Chain Kit 2 x 2m Chains - 2 Clamps Model No. RE91/5/CK

Use in conjunction with Model No. RE91/5 pull ram. The kit contains  $2 \times 2m$  chains each with one hook and two heavy-duty pull clamps.



### F 220mm Pull Clamp Model No. RE94

Suitable for use with body repair kits and chassis straighteners.

Capacity (Straight Pull):	5tonne
Jaw Width:	45mm



### 245mm Box Pull Clamp Model No. RE96

3tonne

Suitable for use with body repair kits and chassis straighteners.

Capacity (Straight Pull):	3tonne
Jaw Width:	35mm



### Wavy-Wire Strip for Panel Pulling System Pack of 50

Model No. RE100/WS

Pack of 50 wavy-wire. Suitable for panel pulling systems.















#### A 4tonne Snap Hydraulic Body Repair Kit Model No. RE97/4

Heavy gauge snap-together pipework and cast snap-together attachments compatible with most leading makes of snap-together equipment. Supplied with hand operated pump, hose, hydraulic ram and storage case.

#### **B** 4tonne SuperSnap® Hydraulic Body Repair Kit Model No. RE83/4

SuperSnap® kits feature snap-together pipework for speed, and threaded attachments for strength. Connecting parts are zinc or cad plated for long, rust-free life. Components are manufactured from high quality steel and finished with red supergloss paint. All attachments interchange with other popular makes so you can use your existing equipment with the SuperSnap® range. Supplied in composite storage case.

### C 10tonne Snap Hydraulic Body Repair Kit Model No. RE97/10

Heavy gauge snap-together pipework and cast snap-together attachments compatible with most leading makes of snap-together equipment. Supplied with 10tonne hand operated pump, hose, hydraulic ram and storage case.


### D 10tonne SuperSnap® Hydraulic Body Repair Kit Model No. **RE83/10**

SuperSnap® kits feature snap-together pipework for speed, and threaded attachments for strength. Connecting parts are zinc or cad plated for long, rust-free life. Components are manufactured from high quality steel and finished with red supergloss paint. All attachments interchange with other popular makes so you can use your existing equipment with the SuperSnap® range. Supplied in composite storage case.



### **E** 20tonne Snap Body Repair Kit Model No. RE9720

Heavy gauge snap-together pipework and snap-together attachments compatible with most leading makes of snap-together equipment. Supplied with 20tonne hand operated pump, hose, hydraulic ram and metal storage case.

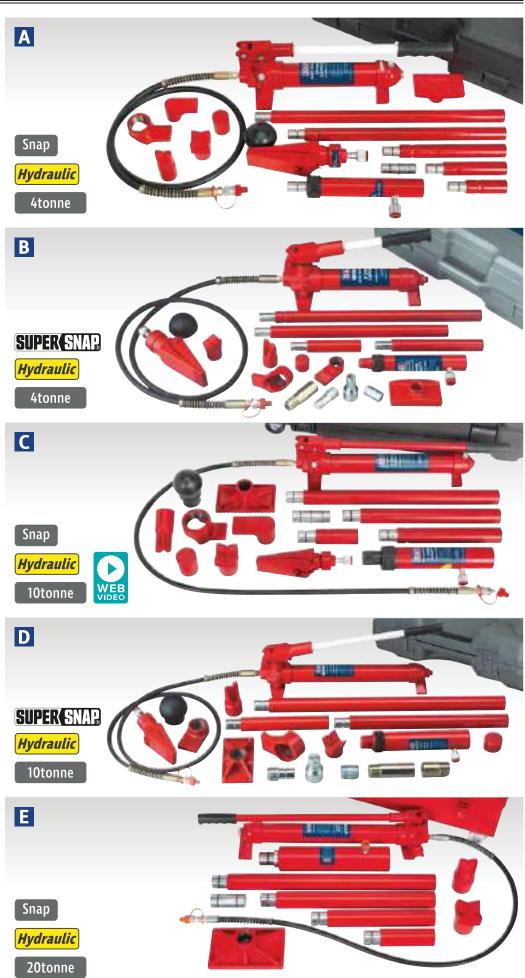





### A 10tonne Air Hydraulic Pumps Model No. SEE BELOW

Suitable for use with SuperSnap® hydraulic ram as supplied with Model No. DZRE21 Body Straightener and all body repair kits. Supplied with or without air hose.

Model No:	Specification	
RE83/840	Air Pump only	
RE83/840/CWH	Air Pump with Hose	
Maximum Air Input:	90-120psi	
Oil Pressure:	10000psi	
Oil Capacity:	450cc	



**B** Paint Thickness Gauge Model No. TA090

For the professional bodyshop or valeting bay to accurately verify the thickness of paint and check for accident damage. Uses magnetic induction to provide accurate and consistent readings to 0.1µm. Suitable for steel and aluminium panels. Easy to calibrate with test plates and precision standards. USB Interface for downloading data to PC. Powered by 2 x 1.5V batteries (supplied).



### C Paint Thickness Gauge Model No. TA091

Ideal for the showroom, bodyshop and valeting bay to accurately verify the thickness of paint and check for accident damage. Uses magnetic induction to provide accurate and consistent readings to 0.1mm. Suitable for iron, steel and aluminium with non-magnetic coatings including paint, enamel, plastic and epoxy. Displays measurement in mm. Powered by CR2032 3V battery (supplied).



Heavy duty repair kit for straightening bent chassis and body damage. Variable position upright allows six preset angles of pull plus a seventh upright position. Supplied as standard with manual hydraulic pump and ram.

Contents: Chassis Frame, SuperSnap® Hydraulic Pump & Ram, Pull Clamp (x2), Sill Clamp (x2), Chain (x2), Chain Hook (x2), Carriage Anchorage Tube, Tube Stand (x2)



Model No. DZRE21


















### A - B Hazardous Substance Cabinets Model No. SEE BELOW


Sturdy metal construction with yellow powder coat. Supplied with a pack of appropriate warning labels. Single door, fitted with 2-point key lock and supplied with two keys. Features an adjustable, lipped shelf and liquid-tight base to retain spills. Smaller compact design for limited space. Illustrated with optional floor stand, for Model No's see below.

A Model No:	FSC06
Size (W x D x H):	350 x 300 x 705mm
Shelves:	1
B Model No:	FSC04
Size (W x D x H):	460 x 460 x 900mm
Shelves:	1

### C - D Floor Stands for FSC06 & FSC04 Model No. SEE BELOW

Sturdy metal stands to support Model No's FSC06 and FSC04.

, , , , , , , , , , , , , , , , , , , ,	
C Model No:	FSC06ST
Size (W x D x H):	350 x 300 x 580mm
D Model No:	FSC04ST
Size (W x D x H):	460 x 460 x 580mm





### **H** 2.2tonne Pneumatic Paint Can Crusher Model No. HCC08

Reduce your waste disposal costs\* - crushing paint cans minimizes the volume of your hazardous waste. Air operated paint can press with safety lock-out device which prevents the door being opened during operation. Bench mounting unit with outlet for waste paint collection.

\* For 'pay by volume' customers.

Internal Size (W x D x H):	280 x 230 x 250mm
External Size (W x D x H):	390 x 250 x 750mm
Air Supply:	100-130psi
Air Inlet:	1/4"BSP
Weight:	44kg



### E Hazardous Substance Cabinet Model No. FSC05

Sturdy metal construction with yellow powder coat. Supplied with a pack of appropriate warning labels. Two doors, fitted with 2-point key lock and supplied with two keys. Features an adjustable, lipped shelf and liquid-tight base to retain spills. Illustrated with optional floor stand, Model No. FSC05ST.

Size (W x D x H):	900 x 460 x 900mm
Shelves:	2

#### F Floor Stand for FSC05 Model No. FSC05ST

Sturdy metal stand to support Model No. FSC05.


Size (W x D x H): 900 x 460 x 445mm



### **G** Hazardous Substance Cabinet Model No. FSC03

Sturdy metal construction with yellow powder coat. Supplied with a pack of appropriate warning labels. Two doors, fitted with 2-point key lock and supplied with two keys. Features three adjustable, lipped shelves and liquid-tight base to retain spills. 155mm Raised, leak-proof door sill.

Size (W x D x H):	900 x 460 x 1800mm
Shelves:	3

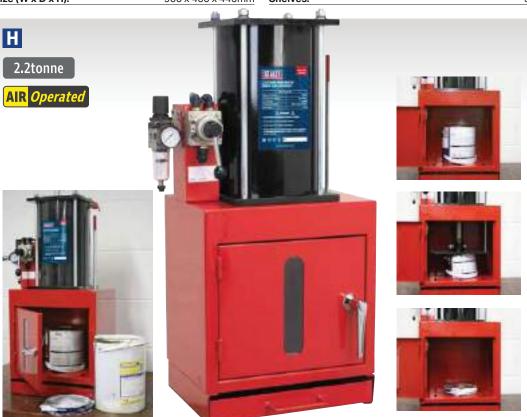





Finishing Pads - Packs of 10 Model No. SEE BELOW

Versatile, long lasting hand pads. Flexible for contoured work surfaces to provide an even finish. Waterproof and solvent resistant. Can be cut-to-size. Supplied in packs of 10.

Мо	del No:	Colour/Grade:	Application:
	HP1523F	Green/Fine	General Purpose
В	HP1523M	Maroon/Medium	Prior to Primer
C	HP1523UF	Grey/Ultra-Fine	Prior to Clear Coat



### F 70 x 130mm Sanding Block Model No. SB66

Accepts 100mm wide abrasive strips. Comfortable contoured grip. Interlocking grip and base separate completely for very simple and fast abrasive changes.

Size:	70 x 130mm
Rigid Scrapers Model No. SEE BELOW	
Model No. 2FF BFFOM	

Chrome plated, highly polished steel blade with composite handle and hanging hole.

Model No:	Blade Width:	Length:
AK5220	40mm	195mm
J AK5221	50mm	195mm
K AK5222	75mm	195mm
ΔK5223	100mm	195mm



### D 65 x 120mm Sanding Block Model No. SB65

Accepts 100mm wide abrasive strips. Comfortable contoured grip. Abrasive firmly retained by integral pins.

Size:	65 x 120mm
Type:	Pinned Fixings



#### G 70 x 210mm Extra-Large Sanding Block Model No. SB68

Accepts 100mm wide abrasive strips. Comfortable contoured grip. Abrasive firmly retained by integral pins.

Size: 70 x 210mm



### M 3pc Body Filler Applicator Set Model No. AK5225

Manufactured from composite material. Suitable for the application of body filler.

**Blade Widths:** 100, 125, 150mm



Manufactured from stainless steel. Suitable for the application of body filler.

Blade Widths:	50, 80, 100, 120mm
Length:	100mm



### **E** 70 x 120mm Dust-Free Sanding Block Model No. RE4011

Hook-and-loop fitting on foam backing plate. Durable plastic body with soft grip incorporating a Ø20mm outlet for connection to an extraction system. Suitable for use with popular dust-free sanding sheets.

Outlet:	Ø20mm
Size:	70 x 120mm



### H 70 x 198mm Dust-Free Sanding Block Model No. RE4012

Hook-and-loop fitting on foam backing plate. Durable plastic body with soft grip incorporating a Ø20mm outlet for connection to an extraction system. Suitable for use with popular dust-free sanding sheets.

Outlet:	Ø20mm
Size:	70 x 198mm



### Model No. PA03

Manufactured from composite material. Suitable for the application of body filler.

Blade Width:	10.5cm
Length:	7cm



#### Air Operated Flat Bed Sander Model No. SA22

For full details please see page 752.


















### A Professional Adjustable Hand File Holder Model No. RE5001

Simple screw adjustment flexes file either concave or convex to suit the job in hand. Features a 2-position swivel lock handle. Suitable for use in professional bodyshops.

File not included - Order Model No's RE5001.9TPI or RE5001.12TPI.



В

### **B** – **C** Hook-and-Loop Sanding Blocks Model No. SEE BELOW

Resilient sanding blocks for both small and large work areas. Both models have a hook-and-loop surface for attaching abrasive.

Model No:	Type:	Size:
B RE4001	Curved Hook-and-Loop	Ø150mm
C RE4002	2-Handed Hook-and-Loop	75 x 440mm



### D 90 x 135mm Sanding Block Flexible Tear Drop

Model No. RE4019

Flexible tear drop shaped sanding block. Designed for sanding various shapes, smaller surfaces and tight angles. Size: 90 x 135mm



### **■** 6pc Hook-and-Loop Sanding Block Kit Model No. **RE40KIT**

Comprehensive kit of resilient rectangle style concave and convex sanding blocks with hook-and-loop surfaces and a flexible tear drop sanding block.

Sizes: Sanding Blocks; RE4015 - Concave 90 x 155mm, **RE4016** - Convex 85 x 155mm, **RE4017** - Convex 90 x 160mm, **RE4019** - Flexible Tear Drop 90 x 135mm, RE4020 - Concave 90 x 155mm, RE4022 - Convex 90 x 150mm



### 407mm Long Board Hook-and-Loop Sanding Block Model No. RE4021


Resilient, long board sanding block with 70 x 407mm hook-and-loop surface. Designed for larger areas such as bonnets and flat panels. Can also be used with clip-on sanding sheets.

Size: 70 x 407mm



Range of resilient shaped sanding blocks for both small and large work areas. All models have a hook-and-loop surface for attaching abrasive.

	G	H		J	K	L
Model No:	RE4015	RE4016	RE4017	RE4018	RE4020	RE4022
Maximum Cutting	90 x 155mm	85 x 155mm	90 x 160mm	125 x 70mm	90 x 155mm	90 x 150mm

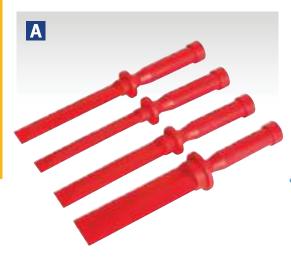

### A 4pc Composite Scraper Set Model No. AK5251

Ideal for removing trim, badges and decals from bodywork. Also suitable for removing residue from alloy wheels. Polypropylene edges will not scratch/mark paint or panel work and can be resharpened with a file when required.


Length:	265mm
Blade Sizes:	19, 22, 26, 37mm



### **D** Underbody Inspection Mirror Model No. AK5960

Adjustable handle and mirror head provides effortless functionality. Ideal for inspection of vehicle's underside.

Mirror Diameter:	Ø200mm
Minimum/Maximum Length:	660/1090mm

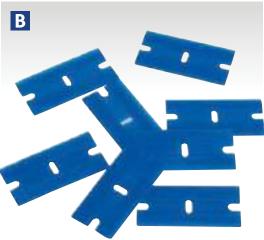

### B Composite Razor Blade - Pack of 100 Model No. AK5228

Pack of 100 composite razor blades. Suitable for use with Blade Holder, Model No. AK5227 .



### Retracting Razor Scraper with Blades Model No. AK867

Chrome plated steel construction with retracting blade carrier for extra safety. Supplied with five spare blades.

Length:	100mm
Replacement Razor Blades:	AK867/1 (Pack of 5)



## G 52 x 83mm Telescopic Inspection Mirror with 2 LED Lights Model No. S0948

5-Section stainless steel inspection tool. 52 x 83mm Mirror with built-in LEDs mounted on twin ball joints for maximum articulation. Ideal for use in low light areas. Contoured and textured comfort grip handle. Supplied with batteries.

Minimum/Maximum Length:	285-876mm
Batterv:	2 x CR2032 (supplied)



### Composite Razor Blade Holder - Pack of 5 Model No. AK5227

Manufactured from composite material. Suitable for holding plastic or metal razor blades. Supplied in pack of five. Ideal for use with Sealey composite razor blades, Model No. AK5228 B.



### **Ø8mm HSS Cobalt Spot Weld Drill Bit** Model No. **AK4734**


Suitable for drilling out spot welds on most common vehicle panels including galvanized and high stress steels. Made from HSS with 5% Cobalt for longer life.


Size:	Ø8mm
Length:	80mm



For the professional bodyshop or valeting bay to accurately verify the thickness of paint and check for accident damage. Uses magnetic induction to provide accurate and consistent readings to  $0.1\mu m$ . Suitable for steel and aluminium panels. Easy to calibrate with test plates and precision standards. USB Interface for downloading data to PC. Powered by  $2 \times 1.5 \text{V}$  batteries (supplied).















Weight of Gun:

## A Stud Welding Kit Model No. SR2000

Professional quality stud welder for fast, efficient body repairs. Removes dents quickly, without holes or the need to remove interior trim. No burn through means that removal of studs and washers is easy and preparation work before repainting is minimized. Suitable for use on steel or aluminium and can weld studs, washers and tabs. Patented quick puller attachment allows removal of smaller dents without the need for studs or washers. Supplied in heavy-duty storage case.

**Contents:** Welding Gun, Power Unit, Quick Puller, Electrodes for Welding, Washers; Round (x10), Triangle (x10), 55 x 22mm Tabs (x10), M4 x 15 Studs (x10), M4 Puller Washer, Earth Bars; 70mm (x2), 155mm

 Supply:
 230V

 Mains Fuse:
 13A

 Maximum Short Circuit Current:
 5000A

 Voltage Range:
 18V AC Output 24V DC, 32V AC Output 44V DC, 18V AC Output 24V DC

A	

## K Stud Welder with Slide Hammer Model No. SR20

A welder of exceptional quality for fast, efficient body repairs. Removes dents quickly, without holes or the need to remove interior trim. Amazing pulling power - even on heavier gauge panels. Welds on washers and nails.

Contents: Welding Gun, Slide Hammer, Electrodes For Welding, Nails; 2mm (x200), 2.5mm (x200), Washers; Ø16mm (x50), Washer Hook & Washer Extension Electrode

Supply:	230V
Mains Fuse:	16A
Power @ 50%:	0.8kW
Maximum Welding Power:	6kW
Maximum Short Circuit Current:	2500A
Weight:	4.9kg









Stud Welding Puller for use with tabs and washers. Adjustable legs have four profiles on the base for different size and shapes of dents. Threaded centre can also be pulled through for use on larger dent removal.

Size/Spread:	190mm
Reach:	80mm
C	
	0
C Tab Shooter for SR2000	

Model No. **SR2000TS**Tab Shooter for use with Model No. SR2000. Holds multiple tabs (Model No. SR2000.T) and loads them semi-automatically for fast and efficient use. Guide on side provides quick and easy alignment for next tab.

## D - J Electrode Kit, Studs, Washers and Tabs for SR2000

## Model No. **NOT ILLUSTRATED**

М	odel No:	Description:	Pack Qty:
D	SR2000.E	Electrode Kit	1
Ε	SR2000.AM	Al-Mg Studs	10
F	SR2000.AMS	Al-Mg-Si Studs	10
G	SR2000.PW	Pull Washers	10
Н	SR2000.SW	Star Washers	10
Ι	SR2000.T	Tabs	10
J	SR2000.TW	Triangle Washers	10



## L-N Stud Welding Nails & Washers Model No. SEE BELOW

Model No:	Description:	Pack Qty:
L PS/0002	Stud Welding Nail 2.5 x 50mm	100
L PS/000250	Stud Welding Nail 2.5 x 50mm	500
M PS/0003	Stud Welding Nail 2 x 50mm	100
M PS/000350	Stud Welding Nail 2 x 50mm	500
N PS/000450	Stud Welding Washer 8 x 15 x	1.5mm 50







## В



## WEB VIDEO

### A Air Suction Dent Puller Model No. RE101

Air activated suction pad keeps firm hold of panel while slide hammer is used to ease out dents and depressions without damage to the paint surface. Ideal for initial panel reshaping. Supplied with Ø75, 100 and 125mm suction pads and hook.

Suction Pads:	Ø75, 100, 125mm
Hook Length:	90mm
Overall Length:	590mm

## B Plunger Type Air Suction Dent Puller Model No. RE012

Versatile suction dent puller fitted with integral vacuum generator/indicator. Retains a firm hold of the panel while the slide hammer is used to ease out dents and depressions without damage to the painted finish. Ideal for initial panel reshaping. Supplied with Ø75, 100 and 125mm suction pads and hook.

Ø75, 100, 125mm
90mm
730mm



Specialist device for pulling dents from panels and bodywork. Contoured aluminium handle and suction release trigger give the technician close control.

_	ט	_
AK100	AK101	AK102
Ø75mm	Ø100mm	Ø125mm
10kg	15kg	20kg
	Ø75mm	<b>AK100 AK101</b> Ø75mm Ø100mm



## © 150mm Suction Dent Puller Model No. AK98

Strong suction will pull-out panel dents, move glass panels and aid handling. Suction releases simply by lifting the edge.

Size:	Ø150mm
Maximum Pull Capacity:	20kg



A great time-saving set. Secures panel trims, decals, badges, window trims, rain and light sensors during preparation stages or while waiting for adhesives to set. Non-marking, composite construction with adjustable reach and clamp.

Clamp Length: 180mm

230V



## H Hot Glue Paintless Dent Repair Kit Model No. RE105


High quality kit for the removal of small dents without the need for respraying/refinishing the painted surface. Pulling tool for use on flat surface includes large rubber feet to avoid damage to the paintwork and rotates 360° to allow use in more restricted areas. Slide hammer is included for use on bigger dents and dents on corners or curves. 12 Plastic tabs of varying sizes and shapes are included to cover a wide range of dents.




**Contents:** 360° Puller Tool, 60W/230V Glue Gun, Slide Hammer, Glue Removal Spray, Plastic Scraper, Dent Repair Glue Sticks (x8), Plastic Tabs (x12)

Consumable Parts:	Model No:	
PDR Dent Repair Tabs - Pack of 12	RE105/1	
PDR Glue Stick - Pack of 25	RF105/2	


















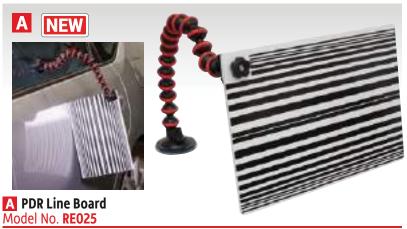

To be used alongside other dent repair tools for added accuracy. Suction cup and flexible neck provides precise positioning. Reflected lines distort when aligned over damaged area, providing visual aid when dressing the panel.

Board Size:	300 x 210mm
Stand Length:	410mm
Type:	Reflective



To be used alongside other dent repair tools for added accuracy. Suction cup and flexible neck provides precise positioning. Light box creates bold lines even in dark areas that distort when aligned over damaged area, providing visual aid when dressing the panel.

Board Size:	270 x 155mm
Stand Length:	260mm
Type:	12V - LED



## PDR Knockdown Tool Model No. RT013

Features four interchangeable heads. The body has an optional extension to take length (including head) from 100mm to 130mm, allowing use in harder to reach areas. Ideal PDR tool for high spots and small dents. Heads include; parallel flat, tapered flat and two sized pointed. Knurled finish on tool for precision handling.

Maximum Length (Including Head):	130mm
Minimum Length (Including Head):	100mm



## D 4pc Panel Bag Set Model No. VS911

Multipurpose durable air cushion devices with rigid edges and fine air control valve. Suitable for positioning panels, bonnets and boots, prior to fitment. 2mm Bag thickness and semi-rigid construction allow bags to be slid between window frame and weather-stripping for improved access for emergency vehicle opening tools. Soft air cushion is gentle on paintwork, frame, beadings and glass. Supplied in a vinyl pouch.

Load Capacity:	100kg
Bag Dimensions (W x H):	40 x 182, 57 x 188, 160 x 160mm



## 3pc Paintless Dent Repair Kit Model No. RE104

Time-saving kit. Heavyweight, heat treated, high quality steel components are carefully shaped and finished to allow the technician (with practice) to coax out all manner of dents and creases from behind the body panel, without the need to respray/refinish the painted surface. Results achieved with this kit will depend on the skill of the operator.

**Contents:** 8", 9", 12" Hooks




## **33pc Paintless Dent Repair Kit** Model No. **RE102**

A comprehensive set of starter tools for the professional bodyshop technician. Heavyweight, heat treated, high quality steel components are carefully shaped and finished to allow the technician (with practice) to coax out all manner of dents and creases from behind the body panel, without the need to respray/refinish the painted surface. Time-saving kit of tools supplied in storage bag.

Results achieved with this kit will depend on the skill of the operator - line board not included.

Contents: Lever Hooks, 45°-90° Flat Nose Bars, Flat Bar, 45° Flat Bar, Panel Bag, Window Wedge, Plastic Punch, Screw-on Plastic Rounded Tips, Door Jam, Curved Rounded Nose Hook Bar

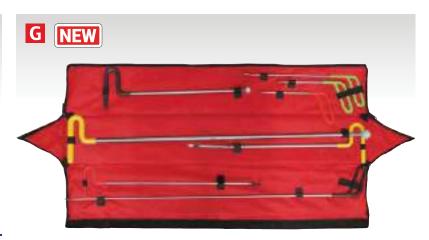

## **G** 8pc Paintless Dent Repair Kit

Model No. RE103

Heavyweight, heat treated, high quality steel components are carefully shaped and finished to allow the technician (with practice) to coax out all manner of dents and creases from behind the body panel, without the need to respray/refinish the painted surface. Time-saving kit supplied in storage bag.

**Contents:** Flare Tip; 6", 7", 12", Serrated Flare Tip; 38", 90° Hook; 22", 45° Hook Tip Extension; 16", Angled Tip Extension; 20", 37"





## A 3pc Panel Seam Splitter Set Model No. AK579

Ideal for separating spot-welded panels during repairs. Chrome Molybdenum hammer-thru shafts. Soft grip handles for comfort and control. Includes straight, 30° offset and 90° angle splitters.

Straight, 30° Offset, 90° Angle Contents:



Chrome Vanadium steel flat splitting tool suitable for the manual cutting of spot welds.

Length: 240mm



C Reciprocating Air Saw Model No. **SA34** 

For full specification see page 753.



Steel shaft hammer with comfortable plastic grip. 2.1kg Sliding weight. Supplied with various attachments.

**Sliding Weight:** 

2.1kg(4.5lb)

Attachments: Small & Large Flat Hooks, Small & Large Round Hooks, Screw Holder, Adaptor, Self Tapping Screw, Taper Screw



### **E** 9pc 1.25kg Slide Hammer Kit Model No. **DP935B**

Slide hammer kit with 1.25kg sliding weight. Comfortable rubber grip handle for added control. Supplied in storage case with attachments.

**Sliding Weight:** 1.25kg(2.75lb) Small & Large Flat Hooks, Small & Large Round Hooks, Screw Holder, Attachments:

Adaptor, Self Tapping Screw, Taper Screw



### 10pc 4.4kg Heavy-Duty Slide Hammer Set Model No. **DP90**

Heavy-duty slide hammer with 4.4kg sliding weight. For use on body panels and vehicle chassis. Supplied with various attachments in tough storage case.

**Sliding Weight:** 4.4kg(10lb)

Attachments: Small & Large Flat Hooks, Small & Large Right Angle Hooks, Straight Bar, Hook with Chain, Self Tapping Screw, Taper Screw, Adaptor



## G 9pc 2kg Slide Hammer Kit Model No. DP9/5B

Slide hammer kit with 2.04kg sliding weight. Comfortable rubber grip handle for added control. Supplied in storage case with attachments.

Sliding Weight: 2kg(4.5lb)

Small & Large Flat Hooks, Small & Large Round Hooks, Screw Holder, Attachments: Adaptor, Self Tapping Screw, Taper Screw



## H 13pc Body Panel Levering/Separating Tool Set Model No. CB50

Assortment of body repair tools, designed for levering, separating and reforming of panels. Supplied in storage case.

**Maximum Bar Length:** 900mm

















Model No. SA121

Mini S.M.A.R.T. repair dent removing air hammer set, with three interchangeable heads. Aluminium and nylon heads prevent scarring and cross contamination when working on aluminium panels. Brass head to be used on components like CV joints and ball joint pins, limiting the risk of damage to sensitive threads.

## A



## **B** 7pc Drop-Forged Panel Beating Set with Fibreglass Shafts Model No. CB707

Polished, drop-forged steel dollies. Hammers with fibreglass handle and rubber grips. Supplied in storage case.

Hammers; Bumping, Pick, Straight, Dollies; Universal, Heel, Curved, Mushroom

## A 7pc Panel Beating Set with Hickory Shafts Model No. CB507

Polished, drop-forged steel dollies. Professional hickory handled hammers. Supplied in storage case.

Contents: Hammers; Shrinking, Pick, Straight, Dollies; Universal, Heel, Curved, Mushroom



## IMPORTANT SAFETY WARNING! Always wear eye protection when using these tools! For our full range of Safety Equipment, see pages 1237 - 1264.





## **D** 9pc Panel Beating Set Model No. CB58

Drop-forged steel dollies and spoons. Professional hickory handled hammers. Supplied in storage case.

Hammers; Bumping, Skinning, Pein/Finish, Pick/Finish, Dollies; Toe, Universal, Heel, Spoons; Dinging, Surfacing



## **E-M** Panel Beating Tools

Model No. <b>SEE BELOW</b>	
E Model No:	CB58.01
Description:	Toe Dolly
F Model No:	CB58.02
Description:	Universal Dolly
G Model No:	CB58.03
Description:	Heel Dolly
H Model No:	CB58.04
Description:	Dinging Spoon
Model No:	CB58.05
Description:	Surfacing Spoon
J Model No:	CB58.06
Description:	Standard Bumping Hammer
K Model No:	CB58.07
Description:	Door Skinning Hammer
L Model No:	CB58.08
Description:	Pein & Finish Hammer
M Model No:	CB58.09
Description:	Pick & Finish Hammer

Model No. AK6915

Model No. GSA53





Offset head for easier cutting. Drop-forged Chrome Molybdenum steel blades for greater strength and durability. Electrodeposition finish to prevent the onset of rust and composite handles for added comfort. Cuts up to 1mm cold rolled steel or 0.6mm stainless steel.

 Capacity:
 1mm

 Length:
 280mm



Generation air shears feature contoured and insulated handle to protect operator from the effects of vibration and chill. Smooth operating mechanism suitable for cutting straight lines in sheet metal up to 1.2mm thickness.

Maximum Cutting Capacity:	1.2mm (Steel)
Air Consumption:	6cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Weight:	1.0kg
Noise Power/Pressure:	106/95dB(A)
Vibration/Uncertainty:	2.71/0.76m/s <sup>2</sup>
Replacement Blade Outer Left:	GSA53.34
Replacement Blade Outer Right:	GSA53.37
Replacement Blade Centre:	GSA53.35



## **B** Aviation Tin Snips - Mini Left Cut Model No. AK6917

Drop-forged, Chrome Molybdenum steel blades with serrated jaws. Induction hardened to 60-62 HRC for high strength. Light and compact for controllable cutting. Cuts up to 1.2mm cold rolled steel or 0.7mm stainless steel.

Capacity:	1.2mm
Length:	190mm



## **E** 3pc Aviation Tin Snip Set Model No. AK6907

Drop-forged, Chrome Vanadium, tempered steel blades with serrated jaws. Self-opening, spring action handles with composite, contoured, colour-coded grips with safety catch.

Contents:	Left, Right, Straight Cut
Length:	250mm



## Aviation Tin Snips - Mini Right Cut Model No. AK6918

Drop-forged, Chrome Molybdenum steel blades with serrated jaws. Induction hardened to 60-62 HRC for high strength. Light and compact for controllable cutting. Cuts up to 1.2mm cold rolled steel or 0.7mm stainless steel.

1.2mm
190mm



## Model No. SEE BELOW

Drop-forged, Chrome Vanadium, tempered steel blades with serrated jaws. Self-opening, spring action handles with composite, contoured, colour-coded grips with safety catch.

	F	G	Н
Model No:	AK6904	AK6905	AK6906
Туре:	Straight Cut	Left Cut	Right Cut
Length:	250mm	250mm	250mm



Drop-forged, Chrome Molybdenum, tempered steel blades with serrated jaws. Self-opening, spring action handles with composite, contoured, colour-coded grips with safety catch.

Length:	275n	
Contents:	Left, Right, Straight Cut	



## 2pc High Leverage Offset Aviation Tin Snip Set Model No. AK69072


Drop-forged, Chrome Molybdenum, tempered steel blades with serrated jaws and offset head for easier cutting. Self-opening, spring action handles with composite, contoured, colour-coded grips with safety catch.

Length:	265mm
Contents:	Left, Right Cut























## A Hand Nibbler Shears Model No. AK327

Suitable for cutting metal and plastics without panel distortion. Interchangeable Chrome Molybdenum steel cutting jaws with safety lock. Contour grip, non-slip handles for extra comfort and safety.

Maximum Thickness:	1.2mm Steel
Maximum Hardness:	85 HRC
Replacement Blade Centre:	AK327/B

## **B** 260mm Tin Snips Model No. AK6911

One-piece, drop-forged handles with induction hardened blades to 55-60 HRC. Cushion grip handle. Cuts up to 0.8mm cold rolled steel or 0.45mm stainless steel.

Maximum Cutting Capacity:	0.8mm
Length:	260mm



## C 250mm Tinman's Shears Spring Loaded Model No. AK6910

One-piece, drop-forged blades with spring loaded handles. Suitable for cutting thin gauge ferrous and non-ferrous metal sheet

Maximum Cutting Capacity:	0.8mm
Length:	250mm



## D 280mm Locking C-Clamp Model No. AK6827

Heat treated Chrome Molybdenum and Chrome Vanadium steel construction with a nickel-plated smooth satin finish. Suitable for clamping material whilst marking, welding, brazing, gluing or soldering. Spring loaded locking mechanism. Heavily knurled adjustment screw for extra grip.

Jaw Capacity:	90mm
Length:	280mm



## E 455mm Locking C-Clamp Model No. AK6841

Heat treated Chrome Molybdenum and Chrome Vanadium steel construction with a nickel-plated smooth satin finish. Suitable for clamping material whilst marking, welding, brazing, gluing or soldering. Spring loaded locking mechanism. Heavily knurled adjustment screw for extra grip.

Jaw Capacity:	160mm
Length:	455mm



## 200mm Locking U-Clamp Model No. AK6828

'U' Style jaw permits the clamping of adjacent joints, allowing good visibility to workpiece. Suitable for assembly and welding work. One-handed operation allows free hand to position material whilst being clamped.

Jaw Capacity:	60mm
Length:	200mm



### G 200mm Sheet Metal Clamp Model No. AK6829

Heat treated Chrome Molybdenum and Chrome Vanadium steel construction with a nickel-plated smooth satin finish. Spring loaded locking mechanism. Heavily knurled adjustment screw for extra grip with greasy fingers.

Jaw Capacity:	30mm
Length:	200mm



## H 165mm Locking C-Clamp Model No. AK6826

One-handed operation allows free hand to position material whilst being clamped. Suitable for clamping material whilst marking, welding, brazing, gluing or soldering.

Jaw Capacity:	45mm
Length:	165mm



Manufactured with rounded contours for smooth, secure handling. Grips feature linear jaw action which applies pressure perpendicular to the workpiece for secure clamping. Compact size with push-button jaw release is ideal for working in confined spaces. Thumb release action allows one-handed operation. Suitable for a wide variety of applications including welding, gluing and riveting.

Jaw Capacity:	18mm
Jaw Width:	25mm
Length:	195mm





### A 6pc Axial Locking Grip Set Model No. AK68403

Grips feature linear jaw action which applies pressure perpendicular to the workpiece for secure clamping. Compact size with push-button jaw release is ideal for working in confined spaces. Thumb release action allows one-handed operation. Suitable for applications including welding, gluing and riveting. See page 217 for full details.



## D Joggler/Flanging Tool Model No. RE92/30


All steel construction with spring loaded handles. Precision jaws make 10mm flange on 18-20 gauge mild steel or



#### G Door Skin Folding Tool Model No. RE92/33

Suitable for preforming and finishing door skins onto door frames. Also suitable for joining sheet material. Fitted with nylon pad to prevent panel deformation.

Length: 320mm

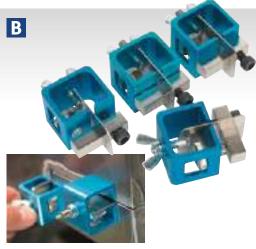

## **B** 4pc Butt Welding Clamp Set Model No. AK6805

An effective method for creating an evenly spaced butt weld joint. Built-in level adjustment of 0-3mm either side allows different thickness materials to be accurately aligned.



## Joggler/Flanging & Punch Tool Model No. RE92/31

All steel construction with swivel head. Joggler tool produces a 10mm flange on 18-20 gauge mild steel or aluminium sheet. Push and turn head to produce Ø6mm holes. Ideal for spot/MIG welding car panels. Fitted with non-slip PVC grips.

Length: 290mm



## C 4pc Micro Welding Clamp Set Model No. AK6804

Small and compact with exceptional clamping force. Ideal for automotive applications when positioning body panels prior to welding. Micro clamp enables areas to be secured where other tools struggle to fit, such as door columns and window edges.

Jaw Capacity: 0-7mm



## Ø5mm Punch Tool Model No. RE92/35

All steel construction with spring loaded handles. Ø5mm Holes are suitable for preparing panels for MIG/spot welding. Fitted with non-slip PVC grips.

Throat Depth:	15mm
Maximum Material Thickness:	1mm
Length:	290mm



## **H** 14pc Metal Punch Set Model No. AK9821




Heavy-duty drop-forged and heat treated steel punch body with compound lever action. Suitable for precision punching of holes in steel, aluminium, brass, copper and plastic. Fitted with gauge for depth adjustment up to 50mm. Suitable for materials up to 14 gauge. Punches and dies hardened to 55-60 HRC. Supplied in storage case.


**Punch & Die Sizes:** 3/32", 1/8", 5/32", 3/16", 7/32", 1/4", 9/32"


















Fitted with pocket clip. Suitable for use on glass, metals and ceramics. Ideal for machinists, welders, tinsmiths and hobbyists.

Length: 150mm

## B 200mm Double End Engineer's Scriber Model No. AK9751

Precision manufactured tool with hardened steel tips. Features straight and 90° tips with knurled body.

Length: 200mm



# **E** 600mm Vice Mounting Sheet Metal Folder Model No. **DF600**

Suitable for use in a sturdy bench mounted vice and capable of bending up to 22 gauge steel sheet. Ideal for small garage or restoration operation.

Capacity: 600mm x 22 Gauge Sheet, Ø2mm Rod

## G 700mm Vice/Bench Mounting Metal Folder

Model No. TS01

Bench and vice mounting sheet metal folder, fitted with mounting plates. Capable of bending a 2mm steel sheet, of limited length, up to and beyond a 90° angle. The unique patented endless design and removable folding plate allows the user to fold, channel and offset any length of sheet metal up to 1mm thick, by simply moving the sheet as required after each fold. With adjustable fold plate to help achieve the cleanest fold possible. Ideal for the small garage or restoration operation.

Width:	700mm
Capacity:	20 Gauge Sheet, Ø1mm Rod



### C Steel Rules Model No. SEE BELOW

High quality steel rules permanently marked in Metric and Imperial graduations. All rules include hanging hole.

Model No:	Length:
AK9640	150mm/6"
AK9641	300mm/12"
AK9642	600mm/24"
AK9643	1000mm/40"



## **T60mm Bench Mounting Sheet Metal Folder** Model No. **DF760**

Bench mounting sheet metal folder, fitted with mounting plates. Capable of bending up to 17 gauge steel sheet. Ideal for the small garage or restoration operation. Suitable clamps (not included) are required to secure the pressing plate for operation.

Capacity: 760mm x 17 Gauge Sheet, Ø2mm Rod









## **D** 910mm Floor Standing Sheet Metal Folder Model No. **DF910**

Floor standing metal folder with 910mm capacity. Manually operated and suitable for folding up to 22 gauge sheet.

Capacity: 910mm x 22 Gauge Sheet, Ø2mm Rod







Drop-forged aluminium body with heavy-duty SCM4 grade jaws, carbon steel jaw case and pin. PVC Handle grips. Four nozzles to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Supplied with nozzle spanner.

Length:	255mm
Rivet Types:	
Aluminium:	
Steel:	X
Stainless Steel:	X
Structural:	X



Easy, quick select nozzle, without the need for other tools. High grade aluminium die-cast body with PVC covered steel handle for added grip. Heat treated carbon steel jaw case. 4-in-1 Nozzle to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Includes a selection of aluminium rivets.

Length:	250mm
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	X
Stainless Steel:	X
Structural:	X
G	WEB
G Threaded Nut Riveting Kit Model No. AK393	

Strong body design and rubber handle grips provide effortless functionality suitable for aluminium nut rivets. Includes 40 assorted nut rivets.

Length:	255mm
Nut Rivet Sizes:	M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1mm
Rivet Nut Type:	
Aluminium:	<b>✓</b>
Steel:	X
Stainless Steel:	X
Structural:	X



High grade aluminium die-cast body with composite covered handles for added grip. Heat treated chrome steel jaws and jaw case. Four nozzles to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Supplied with nozzle spanner. Includes a selection of aluminium rivets.

Length:	250mm
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	X
Stainless Steel:	X
Structural:	X



2-Position head allows jaws to work either at 90° or 180° to the workpiece. Chrome Molybdenum jaws in steel jaw case. Supplied with four nozzles to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Suitable for aluminium and steel rivets. Supplied in storage case with nozzle spanner and a selection of approximately 60 assorted rivets.

Length:	280mm
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	<u> </u>
Stainless Steel:	×
Structural:	×
<u> </u>	)



## H Plastic Riveting Kit Model No. RT001

Suitable for applying plastic rivets found mainly in automotive applications. Designed for one-handed operation and one-stroke setting. Allows access in hard-to-reach areas not accessible by conventional lever type tools. Universal nose piece suitable for all sizes of plastic rivets. Supplied with four packs of plastic rivets.

**Rivets:** Ø5 x 15.8, Ø5 x 17.2, Ø6.3 x 25.2, Ø6.6 x 17.2mm (10 of each)



High grade aluminium die-cast body with heat treated carbon steel handle. Heat treated chrome steel 3-piece jaws and jaw case. Composite handgrips with spanner storage. Four nozzles to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Supplied with nozzle spanner.

250mm
<b>✓</b>
<b>✓</b>
<b>✓</b>
X



Pressed steel body with cast swivel head and Chrome Molybdenum steel jaws. Supplied with four rivet nozzles to accept 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32") and 4.8mm(3/16") rivets. Suitable for aluminium rivets. Fitted with non-slip rubber grip handles and supplied with nozzle spanner and selection of approximately 80 rivets.

280mm
<b>✓</b>
X
X
X



Designed for the installation of plastic rivets where accessibility is restricted due to angle or reach. Universal nose piece suitable for all sizes of plastic rivets. Supplied with four packs of plastic rivets.


**Length:** 220mm **Rivets:** Ø5 x 15.8, Ø5 x 17.2, Ø6.3 x 25.2, Ø6.6 x 17.2mm (10 of each)
















## A Heavy-Duty Compact Riveter with Collection Bowl Model No. AK3982

Industrial grade tool for use in garages, agriculture and general workshops. Short arm design providing effortless functionality and access to restricted space to set rivets up to 6.4mm. Supplied with five interchangeable colour-coded nozzles for all popular rivet sizes. Accepts aluminium, steel and stainless steel rivets. Features special profile nozzle for structural rivets and a built-in mandrel collector.

Length:	325mm
Includes:	Nozzles; 2.4mm (3/32"), 3.2mm (1/8"),
4mm (5/32"), 4.	.8mm (3/16"), 6.4mm (1/4")
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	<b>✓</b>
Stainless Stee	ol:
Structural:	<b>✓</b>



### E Heavy-Duty Long-Arm Riveter with Collection Bowl Model No. AK3981

Precision made, high grade alloy steel jaws with strong aluminium body. Forged alloy steel pins and bolts with double handle bearings for long life and durability. Suitable for blind rivets. Includes Chrome Molybdenum special profile nozzles for structural rivets up to 6.4mm(1/4").

Length:	540mm
Includes: Nozzl	
4.8mm(3/16"), 6.4mm(1/4"), Structural Ste	
Nozzles; 4.8mm(3/16"), 6	mm, 6.4mm(1/4"),
Spanner	
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	<b>✓</b>
Stainless Steel:	<b>✓</b>
Structural:	<u> </u>





## **B** Medium-Arm Riveter with Collection Bowl Model No. AK3983

Chrome Molybdenum jaws and steel handles for extra leverage, provide effortless functionality. Suitable for blind aluminium, steel, stainless steel and structural rivets up to 6.4mm(1/4").

Length:	390mm
Includes:	Nozzles; 2.4(3/32"), 3.2(1/8"), 4(5/32"),
4.8(3/16"), 6.4m	m(1/4")
Rivet Types:	
Aluminium:	<b>✓</b>
Steel:	<b>✓</b>
Stainless Steel	:
Structural:	<b>✓</b>

G



handle gives added comfort. Suitable for aluminium, steel and stainless steel rivets.

Length:		210mm
Nozzles:	2.4(3/32"), 3.2(1/8"), 4(5/32"),	, 4.8mm(3/16")
<b>Rivet Types</b>	:	
Aluminium:		<u> </u>
Steel:		<u> </u>
Stainless St	teel:	
Structural:		X



Curved design provides integral strength. Rubber grip handle for added comfort. Suitable for aluminium, steel and stainless steel nuts.

Length:	210mm
Rivet Nut Sizes:	M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1mm
Rivet Nut Type:	
Aluminium:	<u> </u>
Steel:	
Stainless Steel:	
Structural:	X



### Short-Arm Threaded **Nut Riveter**

## Model No. AK3984

Suitable for rivet nuts in aluminium, steel and stainless steel. Short arms provide effortless functionality and access to restricted spaces.

Length:	285mm
Rivet Nut Sizes:	M3 x 0.5, M4 x 0.7,
M5 x 0.8, M6 x 1, M8	x 1.25mm
Rivet Nut Type:	
Aluminium:	<b>✓</b>
Steel:	<b>✓</b>
Stainless Steel:	<b>✓</b>
Structural:	X

## **G** Long-Arm Threaded **Nut Riveter**

## Model No. AK3985

Suitable for rivet nuts in aluminium, steel and stainless steel. Long arms provide effortless functionality with adjustable stroke scale for improved accuracy.

Length:	410mm
Rivet Nut Sizes:M3 x 0.5, M4 x 0.7, M5 x 0.8	
M6 x 1, M8 x 1.25, M10 x 1.5, M12 x 1.75mm	
Rivet Nut Type:	
Aluminium:	<u> </u>
Steel:	<u> </u>
Stainless Steel:	

## Medium-Arm Ouick Release Threaded Nut Riveter Model No. AK3988

Suitable for rivet nuts in aluminium, steel and stainless steel. Medium arms provide effortless functionality and pull through

quick release mechanism.

Structural:

Length: 34	45mm
Rivet Nut Sizes: M3 x 0.5, M4 x 0.7, M5	5 x 0.8,
M6 x 1, M8 x 1.25, M10 x 1.5, M12 x 1.	75mm
Rivet Nut Type:	
Aluminium:	~
Steel:	~
Stainless Steel:	~

Structural:





## A Lazy Tongs Riveter Model No. S0492

Die-cast head with steel jaw case and Chrome Molybdenum jaws for aluminium, steel and stainless steel rivets. Suitable for repetitive riveting tasks. Supplied with three nozzles,

Length:	880mm
Nozzle Sizes: 4mm(5/32"), 4.8mm(3/16"), 6.4	
Rivet Types:	
Aluminium:	<b>~</b>
Steel:	<b>V</b>
Stainless Stee	· ·
Structural Rive	ts: X

## **B** Lazy Tongs Riveter Model No. AK39902

Aluminium head with steel jaw case and Chrome Molybdenum jaws for aluminium, steel and stainless steel rivets. Suitable for repetitive riveting tasks. Supplied with three nozzies.

Extended Leng	the 880mm
Nozzle Sizes:	4mm(5/32"), 4.8mm(3/16"), 6.4mm(1/4")
Rivet Types:	
Aluminium:	~
Steek	~
Stainless Steet	· ·
Structural:	X

# C Lazy Tongs Riveter Model No. AK399

Aluminium head with steel jaw case and 3-piece jaws for

Extended Length:	790mm
Nozzle Sizes: 2.4	n(3/321), 3.2mm(1/81), 4mm(5/321),
4,8mm(3/16°), 6.4mi	/4"]
Rivet Types:	
Aluminium:	V
Steel:	~
Stainless Steel:	~
Structural:	×



## Quick Action Hand Riveter Model No. AK3990

Aluminium head with steel 3-piece jaws for aluminium, steel and stainless steel rivets. Patented design allows one-handed fast operation. Suitable for repetitive riveting tasks. Supplied with four nozzles.

Length:	270mm
Nozzle Sizes:	2.4mm(3/32°1, 3.2mm(1/8°), 4mm(5/32°),
4.8mm(3/16")	
Rivet Types:	
Aluminium:	<b>~</b>
Steel:	~
Stainless Stee	t: 🗸
Structural	¥

## Riveter

Model No. AK395

Precision made, high grade alloy steel jaws with strong aluminium body. Forged alloy steel pins and bolts with double handle bearings for long-life and durability. Suitable for blind aluminium, steel and stainless steel rivets. Includes Chrome Molybdenum special profile nozzles for structural rivets up to 6.4mm(1/4").


Length:	835mm	
Nozzle Sizes:	4.B(3/16"), 6, 6.4mm(1/4")	
Structural Steel Nozzle	es; 4.8(3/16"), 6.4mm(1/4")	
Rivet Types:		
Aluminium:	V	
Steek	~	
Stainless Steel:	~	
Stemeturals		


blind aluminium, steel and stainless steel rivets. Suitable for repetitive riveting tasks. Knurled nazzles for quick changing. Supplied with five nozzles.

Extended Length:		790mm
Nozzle Sizes:	2.4mm(3/321), 3.2	mm(1/8"), 4mm(5/32"),
4,8mm(3/16°), 6	i.4mm[1/4"]	
Rivet Types:		
Aluminium:		~
Steel:		V
Stainless Stee	1	V
Structural:		X

Suitable for aluminium, steel and stainless steel rivets from 2.4 to 4.8mm. Powered by a 20V 2Ah Lithium-ion battery with a pulling force of up to 9000N. Four selectable power settings help preserve battery by only supplying the force required. LED battery level indicator. Four riveting nozzles, 2.4mm, 3.2mm, 4mm, 4.8mm. Supplied in durable plastic storage case with mains charger and 2Ah battery.

Nozzle Sizes:	2.4, 3.2, 4, 4.8mm
Maximum Pulling Force:	9000N
Battery Type:	20V 2Ah Li-ipn
Replacement Battery:	CP314BP
Weight:	
Rivet Nut Types:	
Aluminium:	~
Steek	~
Stainless Steel:	9
























## C 3pc Spiral Flute HSS M2 Step Drill Bit Set

#### Model No. AK4743

Double spiral flutes for efficient swarf clearance. Eighteen different size holes with just three bits.

Size Coverage #1: 4, 5, 6, 7, 8, 9, 10, 11, 12mm Size Coverage #2: 4, 6, 8, 10, 12, 14, 16, 18, 20, 22mm

Size Coverage #3: 4, 6, 8, 10, 12, 14, 16, 18, 20,

22, 24, 26, 28, 30mm



Model No. AK396

**Blind Rivet Nozzle Sizes:** 

4.8mm(3/16")

**Rivet Nut Sizes:** 

**Rivet Stud Sizes: Rivet Materials:** 

A Blind Nut & Stud Riveting Kit

spanners and a selection of steel rivet nuts.

Suitable for blind rivets, rivet nuts and rivet studs in aluminium,

steel and stainless steel. 360° Swivel head gives greatly improved

accessibility. Four nozzles for standard rivets, four mandrels

for rivet nuts and three mandrels for rivet studs. Supplied with

Rivets Nuts Supplied: M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1mm



2.4(3/32"), 3.2(1/8"), 4(5/32"),

M4 x 0.7, M5 x 0.8, M6 x 1mm

Aluminium, Steel, Stainless Steel

M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1mm





### **B** Rivet & Threaded Nut Rivet Kit Model No. AK39602

Drop-forged frame with patented folding mechanism for compact storage. Comfortable cushion grips. Heavy-duty head suitable for fixing blind rivets and threaded nut rivets to thin sheet material. Suitable for aluminium, steel and stainless

Blind Rivet Sizes:	3.2(1/8"), 4(5/32"), 4.8(3/16"), 6,
6.4mm(1/4")	
Rivet Nut Sizes: M4 x 0.	7, M5 x 0.8, M6 x 1, M8 x 1.25, M10 x

Folded Length:	300mm
Unfolded Length:	520mm
Rivet Materials: Aluminium, Steel, Stainles	

G



1-13mm





# **D-E** HSS Cobalt Fully Ground Drill Bit Sets

Model No. SEE BELOW

Model No:	Description:
D AK4701	19pc, 1-10mm in 0.5mm increments
E AK4702	25pc, 1-13mm in 0.5mm increments



(10pc each)



Size (Metric):

3.2 x 10mm

3.2 x 13mm



Grip Range: Pack Qty:

200

2.5-7mm

9-11mm



Model No:	Flange Type:	Size (Metric):	Size (Imperial):	Grip Range:	Pack Qty:
<b>RAB3280S</b>	Standard	3.2 x 8mm	1/8" x 5/16"	3.5-5mm	200
<b>RAB4010S</b>	Standard	4 x 10mm	5/32" x 3/8"	5-6.5mm	200
RAB4814S	Standard	4.8 x 14mm	3/16" x 1/2"	8-10mm	200
RAB3210L	Large	3.2 x 10mm	1/8" x 3/8"	5-7mm	200



Model No:

RM3210S

RM3213S



Size (Imperial):

1/8" x 3/8"

1/8" x 1/2'



F Multi-Grip Aluminium Rivets

Flange Type:

Standard

Standard

Model No. SEE BELOW

1100011101911					
Model No:	Flange Type:	Size (Metric):	Size (Imperial):	Grip Range:	Pack Qty:
RP4812	Standard	4.8 x 12mm	3/16" x 7/16"	2-6mm	200
RP4819	Standard	4.8 x 19mm	3/16" x 3/4"	8-12mm	200







## Blind Aluminium Rivets Model No. **SEE BELOW**

Model No:	Flange Type:	Size (Metric):	Size (Imperial):	Grip Range:	Pack Qty:
RB6412S	Standard	6.4 x 12mm	1/4" x 7/16"	3-6mm	200
RB6418S	Standard	6.4 x 18mm	1/4" x 23/32"	10-12mm	200





Air/Hydraulic Riveter Model No. SA31

Powerful tool suitable for both aluminium and blind steel rivets up to 3/16". Supplied with four riveting nozzles and two spanners. Trigger operated riveter with hardened steel jaw assembly and rivet shaft safety cap.



## B Air/Hydraulic Riveter Model No. SA312

Suitable for aluminium, steel and stainless steel rivets up to 3/16". Supplied with four riveting nozzles and two spanners. Trigger operated riveter with hardened steel jaw assembly and rivet shaft safety cap. Will handle heavy assembly work.



## Air/Hydraulic Riveter Model No. GSA312

Suitable for aluminium, steel and stainless steel rivets up to 3/16". Supplied with four riveting nozzles and two spanners. Trigger operated riveter with hardened steel jaw assembly and rivet shaft safety cap. Will handle heavy assembly work. Composite handle insulates user from chill and vibration.



## D Heavy-Duty Air/Hydraulic Riveter Model No. SA314

Heavy-duty model suitable for aluminium. steel and stainless steel rivets up to 1/4". Supplied with five riveting nozzles and two spanners. Trigger operated riveter with hardened steel jaw assembly and rivet shaft safety cap. Ideal for heavy assembly work.



## Heavy-Duty Air/Hydraulic Riveter Model No. GSA314

Heavy-duty model suitable for aluminium, steel and stainless steel rivets up to 1/4". Supplied with five riveting nozzles and two spanners. Trigger operated riveter with hardened steel jaw assembly and rivet shaft safety cap. Ideal for heavy assembly work. Composite handle insulates user from chill and vibration.



## Air/Hydraulic Riveter Vacuum System Model No. SA316

Powerful tool suitable for aluminium, steel, stainless steel and structural blind rivets up to 1/4". Trigger operated riveter with hardened steel jaw assembly and air-actuated vacuum rivet shaft collector. Grip for added comfort and hanging loop for use with balancer. Supplied with three riveting nozzles, two spanners and oil can.

	A	В	C	D	E	E
Model No:	SA31	SA312	GSA312	SA314	GSA314	SA316
Nozzle Sizes:	3/32*(2.4mm),	3/32*(2.4mm),	3/32*(2.4mm),	3/32*(2.4mm),	3/32*(2.4mm).	3/16"(4.8mm),
	1/8*(3.2mm),	1/8*(3.2mm),	1/8'(3.2mm),	1/8*(3.2mm),	1/8*(3.2mm),	7/32°[5.6mm],
	5/32*(4mm),	5/32*(4mm).	5/32"(4mm),	5/32*(4mm),	5/32°(4mm).	1/4*(6.4mm)
	3/16 (4.8mm)	3/16'(4.8mm)	3/16"(4.8mm),	3/16%4.8mm),	3/16"(4.8mm).	
				1/4"(6.4mm)	1/4*(6.4mm)	
Air Consumption:	4cfm	4afm	4cfm	4cfm	4cfm	4cfm
Operating Pressure	90psi	90psi	90psi	90psi	90psi	90psi
Inlet Size:	1/4*BSP	1/4"BSP	1/4"BSP	1/4*BSP	1/4"BSP	1/4"BSP
Weight:	1.3kg	1.3kg	1.3kg	1.6kg	1.6kg	1.9kg
Blind Rivet Type:	10.000	notal:	: 9/RIS	70,000	N. W. W. St.	1000
Aluminium:	~	~	~	~	~	~
Steel:	~	~	~	~	~	~
Stainless Steel:	~	~	~	~	~	~
Structural:	×	×	X	×	X	~
Noise Power/ Pressure:	81/71dB(A)	81/71dB(A)	80/71dB(A)	81/71dB(A)	80/71dB(A)	82/71dB(A)





## G Air/Hydraulic Nut Riveter Vacuum System Model No. SA317

Suitable for all types of nut rivets. Supplied with seven mandrels, two spanners and oil syringe. Trigger operated with automatic wind release for fast application. Will handle heavy assembly work.

Mandrel Sizes:	M3, M4, M5, M6, M8, M10, M12
Air Consumption:	4.5cfm
Operating Pressure:	100ps
Inlet Size:	1/4°BSP
Weight:	2.6kg
Stroke Range:	1-8mm
Noise Power/Pressure:	89/78dB(A)






@sealeutools

















## Recirculating

## A Air Recirculating Economy Sandblasting Kit Model No. SG10E

Suitable for use in the bodyshop. The feathering action makes this blaster ideal for treating stone chips. Supplied with a set of four rubber nozzles for sealing the gun head to the panel and a 700g bottle of blasting grit. Replacement nozzles are available.

Operating Pressure:	60-120psi
Air Consumption:	5-10cfm
Replacement Nozzles:	SG10/ACC



## D Sandblasting Gun with 6mm Nozzle Model No. SSG8

Suitable for cleaning small areas such as wheels or chassis members. This gun will accept a variety of abrasives including sand, chilled iron grit and other proprietary types of beading.

Nozzle Diameter:	Ø6mm
Operating Pressure:	90-120psi
Air Consumption:	14-18cfm

## **B** 25kg Shot Blasting Grit Model No. SEE BELOW

Suitable for workshop, handheld and recirculating shot blasters and complies with COSHH SI-1657-1988. Not suitable for use in shot blasting cabinets.

Model No:	Weight:	Size:	Container:
B/25KG	25kg	200-700microns	Bag
BGT25KG	25kg	200-700microns	Tub



## **E** Bulk Feed Sandblasting Gun with 6mm Nozzle Model No. SSG9

Suitable for cleaning large areas, this gun will accept a variety of abrasives including sand, chilled iron grit and other proprietary types of beading.

Ø6mm
30-70psi
6cfm
1m

## G Shot Blasting Grit - Pack of 6 Model No. SG10/SAND6

Suitable for Sealey and other recirculating shot blasters. Complies with COSHH SI-1657-1988. Not suitable for use in shot blasting cabinets.

Weight:	6 x 700g
Container:	Bottle



## 25kg Blasting Soda Model No. SEE BELOW

Soda will not etch glass and will not warp or remove metalwork. Leaves a rust inhibitor behind for up to six weeks.

Model No:	Weight:	Size:	Container:
SBG25KG	25kg	285microns	Bag
BSBG25KG	25kg	285microns	Tub



## F Portable Shot Blasting Kit Model No. SB993

Compact and portable shot blasting kit. Large capacity hopper with convenient carry handle and wraparound hose storage. Supplied with 4.5m grit hose and fitted with a heavy-duty shot blasting gun.

Maximum Fill Weight:	22kg
Operating Pressure:	50-120psi
Air Consumption:	3.5cfm @ 50psi
Inlet Size:	1/4"BSP
Weight:	2.4kg







Compact and portable shot blasting kits. Large capacity hopper with handle and heavy-duty rubber wheels for easy manoeuvrability. Supplied with 3m grit hose, fitted with a heavy-duty shot blasting gun and four ceramic nozzles.

	A	В
Model No:	SB994	SB995
Maximum Fill Weight:	22.6kg	40kg
Operating Pressure:	60-125psi	60-125psi
Air Consumption:	10-16cfm	10-16cfm
Inlet Size:	1/4"BSP	1/4"BSP
Ceramic Nozzle Sizes:	4, 5, 6, 7mm	4, 5, 6, 7mm
Overall Size (W x D x H):	330 x 370 x 685mm	432 x 458 x 940mm
Nett Weight:	4.8kg	7.7kg



Pressurised tank for maximum power. Supplied with 2.4m rubber hose, five ceramic nozzles and in-line water trap for moisture-free grit blasting. Also includes bayonet air line coupling and airflow regulator. Both accept a variety of grits up to 700microns and are suitable for stripping rust and paint from wheels, chassis, panels and other corroded/painted surfaces.

	_	U
Model No:	SB997	SB998
Maximum Fill Weight:	46kg	92kg
Operating Pressure:	60-125psi	60-125psi
Air Consumption:	6-25cfm	6-25cfm
Inlet Size:	1/4"BSP	1/4"BSP
Ceramic Nozzle Sizes:	2, 2.5, 3, 3.5, 5mm	2, 2.5, 3, 3.5, 5mm
Grit Size:	700microns	700microns
Maximum Grit Consumption:	180kg/hr	180kg/hr
Nett Weight:	17.7kg	23.6kg



### E Shot & Soda Blasting Kit Model No. SBKITA

You may also refer to the individual Model No. for full specification.

Contents: SB997, SB99.KIT, SSP141, SBG25KG, B/25KG



Suitable for controlled removal of paint, mould, carbon, grease and rust. When adjusted correctly, is particularly useful in areas where less aggressive cleaning is required, such as around windows (without etching the glass) and even for stripping paint from wooden furniture. Suitable for use on food industry machinery, as soda-blasting is an A1 rated cleaning agent. Also inhibits rust on untreated surfaces for up to six weeks. Made of strong composite resin. Just add dry blasting soda into the container and connect to source of compressed air to use. Adjustable nozzle allows control from narrow to wider

Nozzle Diameter:	Ø5mm
Operating Pressure:	75-115psi
Air Consumption:	8 5cfm @ 90nsi





## **G** Soda Blasting **Conversion Kit for** SB997 & SB998

Model No. SB99.KIT

Soda blasting accessory for use in conjunction with Model No's SB997 and SB998 shot blasters. Quick and simple to fit and use. Soda blasting is especially suitable in the classic car market as soda will not etch glass and will not warp or remove metalwork. Surface will be left smooth. Soda also leaves a rust inhibitor behind for up to six weeks.




















## A Shot Blasting Cabinet with Gun Model No. SB951

Steel cabinet with replaceable viewing screen and internal illumination. Fitted with shot blasting gun and suitable for proprietary brands of glass beads, silicon carbide, aluminium oxide and silica sand only. Excellent for a wide variety of workshop and bodyshop cleaning applications. Requires a standard, dry workshop air supply. Supplied assembled and ready for use.

Air Consumption:	12cfm
Operating Pressure:	90psi
Inlet Size:	1/4"BSP
Dimensions (W x D x H):	640 x 490 x 490mm
Doors:	1
Door Size:	530 x 440mm
Viewing Area:	490 x 395mm



Heavy-duty steel cabinet with toughened glass viewing screen and integral low voltage illumination. Two large side doors provide easy-access for bulkier items. Includes Ø34mm dust extraction port for a clear view. Heavy gauntlets provide hand protection and cabinet is supplied with sand blasting gun with three spare ceramic nozzles. Suitable for glass beads, silica sand, aluminium oxide and other proprietary brands of blasting media. Includes pack of 10 screen covers.

Air Consumption:	5cfm
Operating Pressure:	60-85psi
Inlet Size:	1/4"BSP
Dimensions (W x D x H):	695 x 580 x 625mm
Doors:	2
Viewing Area:	485 x 275mm



Steel cabinet with replaceable viewing screen and internal illumination. Fitted with shot blasting gun and suitable for proprietary brands of glass beads, silicon carbide, aluminium oxide and silica sand only. Excellent for a wide variety of workshop and bodyshop cleaning applications. May either be bench mounted or floor mounted on the optional stand Model No. SB972/ST. Requires a standard, dry workshop air supply. Supplied assembled and ready for use.

Air Consumption:	13cfm
Operating Pressure:	80psi
Inlet Size:	1/4"BSP
Dimensions (W x D x H):	760 x 510 x 715mm
Doors:	1
Door Size:	710 x 350mm
Viewing Area:	570 x 270mm
Floor Stand (Optional):	SB972/ST





Heavy-duty steel cabinets with toughened glass viewing screen and integral low voltage illumination. Double side doors on Model No. SB974 provide easy-access for bulkier items. Includes dust extraction port. Heavy gauntlets provide hand protection and each cabinet is supplied with sand blasting gun, four ceramic nozzles and a pack of screen covers. Suitable for glass beads, silicon carbide, aluminium oxide and shot blasting grit only.

D	E
SB973	SB974
15cfm	15cfm
90psi	60-120psi
1/4"BSP	1/4"BSP
890 x 570 x 1380mm	960 x 720 x 1500mm
1	2
Ø60mm	Ø64mm
570 x 270mm	580 x 270mm
	\$B973 15cfm 90psi 1/4"BSP 890 x 570 x 1380mm 1 Ø60mm



F Stand for SB972 Model No. SB972/ST

Floor stand for use with Model No. SB972 shot blasting

**Nett Weight:** 10.75Kg



All models feature integral low voltage lighting and are supplied with either a shot or sand blasting gun. Model No's SB970 and SB974 are equipped with two doors to give easier access for bulkier items.