

# HOW TO ORDER



Our aim is to make ordering as quick, easy and convenient as possible. Our products are available via a comprehensive network of stockists throughout the UK, Ireland and the rest of the world.

Our Distributors hold stock of fast-moving items. If they do not have the specific item that you require, they can order it from us and we will deliver it promptly.

**Finding your local Stockist is quick and easy, either visit [www.sealey.co.uk](http://www.sealey.co.uk) or call us on the number shown below.**



**+91 9380647428**

**+91 8073843541**



**[info@vandita-technovations.in](mailto:info@vandita-technovations.in)**



**[www.vandita-technovations.in](http://www.vandita-technovations.in)**

**Our call centre is open between 8.30am to 5.30pm Monday to Friday.** Calls are immediately passed to the first available operator without any complicated routing process. Our experienced, professional and friendly advisors can provide instant stock availability, pricing and technical information.

Our authorised stockists can order direct from us via telephone, email, fax or online using our B2B (Business to Business) website. Here, you can place your order at a time that suits you and view instant stock availability and pricing.

## HUGE STOCKS & FAST DESPATCH

We hold over £30million worth of stock. Modern, computer controlled warehousing enables, on average, 99.8% of our entire product range to be despatched straightaway.

Some items in our Catalogue are very heavy and extra assistance is recommended at the delivery point to help unload. Look out for this logo on products affected.



<b>1</b>	<b>HAND TOOLS</b>	<b>14-264</b>
<b>2</b>	<b>JACKING &amp; LIFTING</b>	<b>265-324</b>
<b>3</b>	<b>MOTORCYCLE TOOLS</b>	<b>325-353</b>
<b>4</b>	<b>BATTERY CHARGERS</b>	<b>354-377</b>
<b>5</b>	<b>VEHICLE SERVICE TOOLS</b>	<b>378-629</b>
<b>6</b>	<b>LUBRICATION</b>	<b>630-677</b>
<b>7</b>	<b>BODYSHOP</b>	<b>678-729</b>
<b>8</b>	<b>AIR POWER TOOLS</b>	<b>730-764</b>
<b>9</b>	<b>COMPRESSORS</b>	<b>765-796</b>
<b>10</b>	<b>WELDING &amp; CUTTING</b>	<b>797-819</b>
<b>11</b>	<b>ELECTRIC POWER TOOLS</b>	<b>820-857</b>
<b>12</b>	<b>POWER TOOL ACCESSORIES</b>	<b>858-912</b>
<b>13</b>	<b>LIGHTING &amp; POWER</b>	<b>913-953</b>
<b>14</b>	<b>STORAGE &amp; WORKSTATIONS</b>	<b>954-1073</b>
<b>15</b>	<b>HEATING &amp; COOLING</b>	<b>1074-1095</b>
<b>16</b>	<b>JANITORIAL, MATERIAL HANDLING &amp; LEISURE</b>	<b>1096-1176</b>
<b>17</b>	<b>MACHINE SHOP</b>	<b>1177-1236</b>
<b>18</b>	<b>SAFETY PRODUCTS</b>	<b>1237-1264</b>
<b>19</b>	<b>CONSUMABLES</b>	<b>1265-1331</b>
<b>INDEX - MODEL NO.</b>		<b>1332-1362</b>
<b>INDEX - DESCRIPTIVE</b>		<b>1363-1370</b>

# JANITORIAL, MATERIAL HANDLING & LEISURE

## SECTION 16

*back to*  
**SECTION LIST**



**Bicycle Racks & Stands**  
*1170 - 1171*

**Brooms & Brushes**  
*1116 - 1117*

**Buckets & Bins**  
*1120 - 1112*

**Bungee Cords**  
*1163*

**Car Cleaning Accessories**  
*1104 - 1105*

**Clamps & Vehicle Locks**  
*1168*

**Grit/Salt Boxes**  
*1132*

**Heated Jackets**  
*1171*

**Hydraulic Platform Trucks**  
*1155*

**Ladders & Steps**  
*1136 - 1143*

**Log Splitters**  
*1134 - 1135*

**Mops & Squeegees**  
*1118 - 1119*

**Pallet Trucks**  
*1156*

**Platform Trucks**  
*1161*

**Pressure Washers**  
*1098 - 1103*

**Ratchet Tie Downs**  
*1162 - 1166*

# SECTION 16

*back to*  
**SECTION LIST**

**Sack Trucks**  
*1157 - 1160*

**Safety Barriers**  
*1169*

**Scaffold Towers**  
*1143*

**Shovels**  
*1133*

**Spreaders**  
*1130 - 1131*

**Tarpaulins**  
*1162*

**Tow Ropes & Poles**  
*1154*

**Towing Accessories**  
*1144 - 1149*

**Vacuum Cleaners**  
*1108 - 1115*

**Valeting Machines**  
*1115*

**Vehicle Covers & Shelters**  
*1172 - 1176*

**Water Hoses & Reels**  
*1106 - 1107*

**Water Pumps**  
*1124 - 1128*

**Wheelbarrows**  
*1129*

**Winches & Power Pullers**  
*1150 - 1153*

**Workshop Matting**  
*1123*



*Check out our Consumables section for cleaning detergents, car shampoos, paper rolls, wipes and much more!*



## A 110bar Pressure Washer with TSS & Accessory Kit

Model No. PW1601

Lightweight, powerful entry level unit designed for domestic and light trade use. Ideal for a range of applications including cleaning vehicles, patios, decking, motorbikes and barbecues. Fitted with a powerful 1700W motor with 330 litre water flow per hour and a maximum pressure output of 110bar. Features Automatic Total Stop System (TSS), which switches the motor on and off when the trigger is operated, prolonging motor life. Fitted with accessory storage and hose/cable hook to ensure unit stays clutter-free and mobile. Supplied with 3m hose and full accessory kit including lance extension, patio brush, rotary brush, fixed brush and detergent bottle.

Electrical Plug Type:	3-Pin BS
Hose Length:	3m
Maximum Pressure:	110bar(1600psi)
Motor Power:	1700W
Rated Pressure:	80bar(1160psi)
Rotablast Nozzle®:	✗
Supply:	230V - 13A
Total Stop System:	✓
Water Flow:	330L/hr



## B 130bar Pressure Washer with TSS & Rotablast® Nozzle

Model No. PW1850

Powerful unit designed for frequent domestic and light trade use. Fitted with a powerful 1900W carbon brush motor with 420 litre water flow per hour and a maximum pressure output of 130bar. Features Automatic Total Stop System (TSS) which switches the motor on and off when the trigger is operated, prolonging motor life. Includes accessory storage to ensure unit stays clutter-free and fully mobile. Supplied with 4m hose, foam lance and bottle, variable spray nozzle and Rotablast® Turbo nozzle which helps develop the same effective cleaning power (ECP) as a 180bar/2600psi pressure washer.

Electrical Plug Type:	3-Pin BS
Hose Length:	4m
Maximum Pressure:	130bar(1885psi)
Motor Power:	1900W
Rated Pressure:	100bar(1450psi)
Rotablast Nozzle®:	✓
Supply:	230V - 13A
Total Stop System:	✓
Water Flow:	420L/hr



## C 140bar Pull Along Pressure Washer with TSS

Model No. PW2000PA

Lightweight and powerful entry level unit, designed for domestic and light trade use. Ideal for a range of applications including cleaning vehicles, patios, decking, motorbikes and barbecues. Fitted with a powerful 1800W carbon brush motor with 400 litre water flow per hour and a maximum pressure output of 140bar. Includes Total Stop System. Fitted with accessory storage to ensure unit stays clutter-free and mobile. Supplied with 5m hose, spray nozzle, lance and detergent bottle. Sits on two castor wheels and two fixed wheels for easy manoeuvrability.

Electrical Plug Type:	3-Pin BS
Hose Length:	5m
Maximum Pressure:	140bar(2030psi)
Motor Power:	1800W
Rated Pressure:	100bar(1450psi)
Rotablast Nozzle®:	✗
Supply:	230V - 13A
Total Stop System:	✓
Water Flow:	400L/hr





**A**  
400L/hr

**B**  
438L/hr

**ROTABLAST® NOZZLE**
**AUTOMATIC TOTAL STOP SYSTEM**
**A - B Pressure Washers with TSS & Rotablast® Nozzle**  
Model No. SEE BELOW

Fitted with heavy-duty induction motors and improved pumps, these units are designed for regular domestic and light trade use. Both units are supplied with variable spray lance and Rotablast® Nozzle. Model No. PW2200 is fitted with innovative selectable dual detergent tank, ideal for applying multiple cleaning agents. Model No. PW2500 is fitted with a built-in detergent tank and a 5m hose reel. Both models are fitted with cable and lance storage.

	<b>A</b>	<b>B</b>
Model No:	PW2200	PW2500
Maximum	140bar(2030psi)	170bar(2350psi)
Pressure:		
Effective	257bar(3727psi)	275bar(3995psi)
Cleaning Power:		
Water Flow:	400L/hr	438L/hr
Motor Power:	1800W	2500W
Supply:	230V - 13A	230V - 13A
Total Stop System:	✓	✓
Rotablast® Nozzle:	✓	✓
Hose Length:	5m	5m
Weight:	17.2kg	19.7kg

**C**

**C** Variable Lance for PW2200 & PW2500  
Model No. PWA01

**D**

**D** Rotablast® Lance for PW2200 & PW2500  
Model No. PWA02

**E**

**E** Fixed Brush for PW2200 & PW2500  
Model No. PWA03

**F**

**F** Rotary Brush for PW2200 & PW2500  
Model No. PWA04

**G**

**G** Floor Brush with Detergent Tank for PW2200 & PW2500  
Model No. PWA05

**H**


420L/hr

**ROTABLAST® NOZZLE**

498L/hr

**AUTOMATIC TOTAL STOP SYSTEM**
**MADE IN ITALY**
**I**

**H - I Professional Pressure Washers**  
Model No. SEE BELOW

Professional units designed in Italy. Perfect for rigorous daily use in domestic, trade and commercial environments. These units are manufactured using top quality components. Model No. PW3500 is fitted with innovative accessory storage on the rear of the unit. Model No. PW5000 is supplied with five interchangeable nozzles. Both models are fitted with hose reels, built-in detergent tanks and heavy-duty wheels.

	<b>H</b>	<b>I</b>
Model No:	PW3500	PW5000
Maximum	140bar(2050psi)	160bar(2200psi)
Pressure:		
Effective	240bar(3485psi)	n/a
Cleaning Power:		
Water Flow:	420L/hr	498L/hr
Motor Power:	2100W	2500W
Supply:	230V - 13A	230V - 13A
Total Stop System:	✓	✓
Rotablast® Nozzle:	✓	✗
Hose Length:	8m	10m
Nozzles:	Pencil, Fan	Pencil, Fan; 15°, 25°, 40°, Low Pressure
Weight:	18.8kg	33.2kg

**J**

**J** Floor Brush for PW3500 & PW5000  
Model No. PWA07

**K**

**K** Floor Brush for PW3500 & PW5000  
Model No. PWA09

**L**

**L** Rotary Brush for PW3500 & PW5000  
Model No. PWA06

**M**

**M** Water Suction Kit for PW3500 & PW5000  
Model No. PWA10



See our full range of cleaning products on page 1324.



## A 150bar Pressure Washer - Twin Pump with TSS & Rotablast® Nozzle Model No. PWTF2200

Features two pumps and twin nozzle for up to 70% faster cleaning. Eco Soft cleaning mode only activates one pump for light use. Fast cleaning mode activates both pumps together and, with the twin flow nozzle, gets rid of the toughest dirt and stains. Quick release nozzle system allows fast selection between single or twin nozzle. Fitted with two 1250W motors with total 810 litre water flow per hour and a maximum pressure output of 150bar. Features Automatic Total Stop System (TSS) which switches the motor on and off when the trigger is operated, prolonging motor life. Supplied with 8m high pressure hose and reel, detergent bottle, 5m power cable and heavy-duty wheels.

<b>Maximum Pressure:</b>	150bar(2200psi)
<b>Water Flow:</b>	810L/hr(Max.)
<b>Motor Power:</b>	2500W
<b>Supply:</b>	230V - 13A
<b>Total Stop System:</b>	✓
<b>Hose Length:</b>	8m
<b>Weight:</b>	13.95kg
<b>Rotablast® Nozzle:</b>	✓

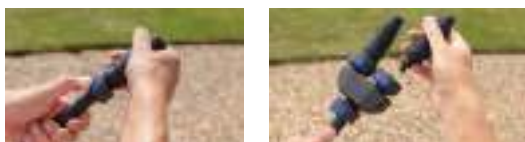

Quick release for switching between single or twin nozzle.

### TWIN NOZZLE +70% FASTER



A

**ROTABLAST®  
NOZZLE**



**AUTOMATIC  
TOTAL STOP  
SYSTEM**

810L/hr

**HIGH  
FLOW**



### Dual Pump Power Cleaning System



Oversized power control dial allows easy selection between Eco Soft and Fast Cleaning.

**1**

**Pump**

Eco Soft  
Cleaning



**2**

**Pumps**

Fast  
Cleaning



## B 290bar Pressure Washer 10hp Diesel Model No. PWDM3600

Diesel powered with electric and recoil starting. Offers high pressure and high flow with diesel economy. Ideal for commercial applications with 5m pressure hose, 1m gun and lance and five interchangeable nozzles. Low pressure liquid detergent injection system. Safety latch on trigger, automatic low oil engine shutdown and thermal pump relief valve reduce risk of misuse and equipment damage. Pneumatic tyres.

<b>Manifold Pressure:</b>	250bar(3625psi)
<b>Maximum Pressure:</b>	290bar(4205psi)
<b>Flow Rate:</b>	900L/hr
<b>Hose Length:</b>	5m
<b>Nozzle:</b>	0°, 15°, 25°, 40° Fan & Detergent
<b>Maximum Inlet Temperature:</b>	50°C
<b>Engine Type:</b>	4-Stroke, Single Cylinder, Diesel
<b>Engine Capacity:</b>	418cc
<b>Engine Power:</b>	10hp
<b>Starting:</b>	Recoil/Electric
<b>Fuel Tank:</b>	7L
<b>Fuel Consumption:</b>	1.7-2.3L/hr
<b>Noise Level:</b>	116dB(A)
<b>Weight:</b>	100kg



Diesel tank.



Detergent suction hose.



Exhaust.



PWDM3600 is supplied with five interchangeable nozzles.

900L/hr

10hp

B





360L/hr

4hp



**A** 150bar Pressure Washer  
360L/hr 4hp Petrol  
Model No. **PWM1300**

Petrol powered pressure washer with recoil starting. Suitable for commercial and domestic applications with 5m pressure hose, gun, lance and adjustable nozzle. Low pressure liquid detergent injection system. Safety latch on trigger and automatic low oil engine shut down reduce risk of misuse and equipment damage. Unit stands on two sucker feet to prevent movement and two wheels for easier mobility with an integral handle.

<b>Manifold Pressure:</b>	110bar(1595psi)
<b>Maximum Pressure:</b>	150bar(2175psi)
<b>Flow Rate:</b>	360L/hr
<b>Hose Length:</b>	5m
<b>Nozzle:</b>	Adjustable
<b>Maximum Inlet Temperature:</b>	40°C
<b>Engine Type:</b>	4-Stroke, Single Cylinder, Petrol
<b>Engine Capacity:</b>	141cc
<b>Engine Power:</b>	4hp
<b>Starting:</b>	Recoil
<b>Fuel Tank:</b>	1L
<b>Fuel Consumption:</b>	0.8-1L/hr
<b>Weight:</b>	20kg



540L/hr

6.5hp



**B** 220bar Pressure Washer  
540L/hr 6.5hp Petrol  
Model No. **PWM2500**

Petrol powered pressure washer with recoil starting. Ideal for commercial applications with 5m pressure hose, 1m gun and lance and interchangeable nozzles. Low pressure liquid detergent injection system. Safety latch on trigger and automatic low oil engine shutdown reduce risk of misuse and equipment damage. Mounted in robust frame fitted with two sucker feet and two wheels for stability and easy mobility.

<b>Manifold Pressure:</b>	175bar(2538psi)
<b>Maximum Pressure:</b>	220bar(3190psi)
<b>Flow Rate:</b>	540L/hr
<b>Hose Length:</b>	5m
<b>Nozzle:</b>	0°, 15°, 25°, 40° Fan & Detergent
<b>Maximum Inlet Temperature:</b>	50°C
<b>Engine Type:</b>	4-Stroke, Single Cylinder, Petrol
<b>Engine Capacity:</b>	196cc
<b>Engine Power:</b>	6.5hp
<b>Starting:</b>	Recoil
<b>Fuel Tank:</b>	4L
<b>Fuel Consumption:</b>	2.1-2.6L/hr
<b>Weight:</b>	35kg



540L/hr

6.5hp



**C** 220bar Pressure Washer  
540L/hr Self-Priming 6.5hp Petrol  
Model No. **PWM2500SP**

Petrol powered pressure washer with recoil starting. Ideal for commercial applications with 5m pressure hose, pick-up hose, 1m gun and lance and five interchangeable nozzles. Features a professional level triplex plunger pump with brass head boasting high efficiency, high pressure output and longevity. Self-priming pump and pick-up hose with filter allows for any reservoir pick-up, to allow use where no mains pressure is available. Low pressure liquid detergent injection system fed from two easily switchable 2.25L tanks allowing for continuous alternate applications without the need to empty/refill. Safety latch on trigger and automatic low oil engine shutdown reduce risk of misuse and equipment damage. Mounted in robust frame fitted with two sucker feet and two wheels for stability and easy mobility.

<b>Manifold Pressure:</b>	175bar(2538psi)
<b>Maximum Pressure:</b>	220bar(3190psi)
<b>Flow Rate:</b>	540L/hr
<b>Hose Length:</b>	5m
<b>Nozzle:</b>	0°, 15°, 25°, 40° Fan & Detergent
<b>Maximum Inlet Temperature:</b>	50°C
<b>Engine Type:</b>	4-Stroke, Single Cylinder, Petrol
<b>Engine Capacity:</b>	196cc
<b>Engine Power:</b>	6.5hp
<b>Starting:</b>	Recoil
<b>Fuel Tank:</b>	4L
<b>Fuel Consumption:</b>	2.1-2.6L/hr
<b>Weight:</b>	40kg



5L



**D** 5L Concentrated General Purpose  
Traffic Film Remover with Wax  
Model No. **SCS003**

General purpose concentrated TFR. Formulated with a specific blend of detergents and additives to remove traffic film, oil, grease and all general soiling found on vehicles. Includes rinse aid and wax to assist with the final stage of cleaning. Biodegradable and additional inhibitor prevents scale build up and corrosion in pressure washer.



**B & C**



PWM2500 & PWM2500SP are supplied with five interchangeable nozzles.





A

AUTOMATIC  
TOTAL STOP  
SYSTEMInduction  
MotorHOT &  
COLD

230V



Control panel.



Diesel tank.



Heat exhaust.



A

### A 135bar Hot/Cold Water Pressure Washer 230V Model No. PW2000HW

420L/hr

Professional, heavy-duty hot/cold water pressure washer. Ideal for a range of applications including cleaning vehicles, commercial equipment, motorbikes, patios and decking. Fitted with a heavy-duty, upgraded induction electric motor with a diesel water heater. Double motor (pump and burner) with three high durability steel pistons and aluminium axial pump. Vertical boiler with high efficiency steel coil and safety valve. Automatic temperature regulation. Detergent tank is built-in for direct suction. Features an automatic Total Stop System (TSS) which switches the motor and heater on and off when the lance trigger is operated, prolonging the motor life. Manufactured with heavy-duty plastic wheels for transportation over rough terrain.

Effective Cleaning Power:	135bar(1958psi)
Flow Rate:	420L/hr
Motor Power:	2100W
Supply:	230V
Heating Fuel:	Diesel
Hose Length:	8m
Peak Water Temperature:	80°C
Weight:	39kg

B

NEW

AUTOMATIC  
TOTAL STOP  
SYSTEM

540L/hr

Induction  
MotorHOT &  
COLD

230V



### B 170bar Hot Water Pressure Washer 230V Model No. PW2500HW

Professional, heavy-duty hot/cold water pressure washer. Ideal for a range of applications including cleaning vehicles, commercial equipment, motorbikes, patios and decking. Fitted with a heavy-duty, upgraded induction electric motor with a diesel water heater. Double motor (pump and burner) with three high durability ceramic coated pistons and aluminium axial pump. Automatic temperature regulation. Detergent tank is built-in for direct suction. Features an automatic Total Stop System (TSS) which switches the motor and heater on and off when the lance trigger is operated, prolonging the motor life. Manufactured with heavy-duty plastic wheels for transportation over rough terrain.

Effective Cleaning Power:	170bar(2465psi)
Flow Rate:	540L/hr
Motor Power:	3000W
Motor:	Induction
Supply:	230V
Heating Fuel:	Diesel
Hose Length:	8m
Pump Head:	Ceramic Coated
Peak Water Temperature:	80°C
Weight:	76.74kg



B




**AUTOMATIC  
TOTAL STOP  
SYSTEM**
**12V**
**36W**
**180L/hr**

#### **A** 12V Portable Pressure Washer Self-Priming Cleaning Kit in Storage Case Model No. PW12CC

Lightweight, portable pressure washer with self-priming submersible pump, supplied in a storage case. Ideal for many washing applications, especially where mains power or water supply is not available, such as car shows, track days, window cleaning or even garden use. Features Automatic Total Stop System (TSS) which switches the motor on and off when the trigger is operated, prolonging motor life. Unit is powered using a 4.8m cable fitted with a 12V vehicle accessory socket plug. Supplied with 8m hose, variable nozzle lance, detergent bottle and a long fixed brush.

Maximum Pressure:	9bar(131psi)
Water Flow Rate:	180L/hr
Motor Power:	36W
Supply:	12V
Hose Length:	8m
Weight:	3.1kg


**AUTOMATIC  
TOTAL STOP  
SYSTEM**
**180L/hr**

#### **B** 25L 12V Rechargeable Pressure Washer Model No. PW2012R

Rechargeable, lightweight, portable pressure washer which can hold up to 25L of water. Ideal for use where a mains power or water supply is not available, such as car shows, track days, window cleaning or even garden use. Inside is a removable storage tray to accommodate all the accessories. Supplied with 8m hose, variable nozzle lance, detergent bottle and a long fixed brush. Detergent can also be added to the main tank. Fitted with four wheels, which makes the unit easy to transport. Fitted with a strong carry handle. Supplied with mains charger and 12V in-car charger.

Capacity:	25L
Battery Type:	12V - 4Ah Li-Ion
Maximum Pressure:	9bar(131psi)
Water Flow Rate:	180L/hr
Motor Power:	36W
Supply:	12V
Hose Length:	8m
Charging Time:	3hr
Operating Time:	2.5hr
Weight:	4.5kg


**AUTOMATIC  
TOTAL STOP  
SYSTEM**
**12V**
**36W**
**180L/hr**

#### **C** 25L 12V Pressure Washer Model No. PW2512

Lightweight, portable pressure washer which can hold up to 25L of water. Ideal for use where a mains power or water supply is not available, such as car shows, track days, window cleaning or even garden use. Unit is powered using a 3m cable fitted with a 12V vehicle accessory socket plug. Supplied with 8m hose, variable nozzle lance, detergent bottle and a long fixed brush. Detergent can also be added to the main tank. Fitted with a strong carry handle.

Capacity:	25L
Maximum Pressure:	9bar(131psi)
Water Flow Rate:	180L/hr
Motor Power:	36W
Supply:	12V
Hose Length:	8m
Weight:	3.1kg


**150L/hr** **12V**  
**Rechargeable** **60W**


#### **D** 17L 12V Rechargeable Pressure Washer Model No. PW1712

Lightweight, cordless pressure washer. Ideal for a range of domestic applications including cleaning vehicles, motorcycles and bicycles. Features 17L water tank which can be detached from base for easy refilling. Unit can be powered using vehicle's 12V socket, but is also fitted with a rechargeable lead acid battery which provides up to 40 minutes of continuous use. Ideal pressure washer where no mains electric supply is available, such as classic car shows and track days. Supplied with 6m hose, variable nozzle and fixed brush, both of which include built-in detergent bottles. Fitted with accessory storage pouch, durable wheels and shoulder strap for easy transportation.

Capacity:	17L
Battery Type:	Lead Acid
Maximum Pressure:	8.5bar(123psi)
Water Flow Rate:	150L/hr
Motor Power:	60W
Supply:	12V
Hose Length:	6m
Charging Time:	6hr
Operating Time:	20-40min
Weight:	6.8kg



**A** 10L Plastic Watering Can  
Model No. WCP10  
Strong and durable 10L plastic watering can with easy carry handle for greater flow control. Includes detachable rose.  
Capacity: 10L



**B** Large Sponge  
Model No. CC64  
General purpose bone-shaped sponge.



**C** Long Handle Dip & Wash Brush  
Model No. CC52  
Fine, split-top bristles gently loosen and brush away dirt. Does not mark expensive clear coats or painted finishes. Long handle for access to hard-to-reach areas.



**D** 2-in-1 Shaggy Microfibre Sponge  
Model No. CC76  
Double-sided sponge with shaggy microfibre strands on one side, which are superb for removing dirt or general cleaning. Non-abrasive mesh cloth on the other side, ideal for removing bugs and obstinate grime.




**E** 2-in-1 Shaggy Microfibre Mitt  
Model No. CC77  
Double-sided mitt with shaggy microfibre strands on one side, which are superb for removing dirt or general cleaning. Non-abrasive mesh cloth on the other side, ideal for removing bugs and obstinate grime.




**F** 2pc Microfibre Brush Set  
Model No. CC84  
Set of shaggy microfibre brushes with contoured handles for added comfort and control. Features long handled brush with removable handle, ideal for accessing hard-to-reach areas, and short handled brush fitted with hanging hook for easy storage. Superb for removing dirt or general cleaning.



**G** Large Interior Brush  
Model No. CC61  
Sturdy bristles scrub away stains from upholstery, floor mats and vinyl tops. Angled design to reach corners easily. Contoured rubber grip for added comfort and control.

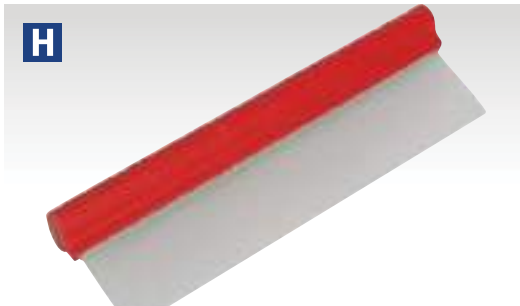

**H** Aqua Flexi-Blade  
Model No. CC65  
Cuts drying time in half by removing excess water.  
Blade Length: 300mm

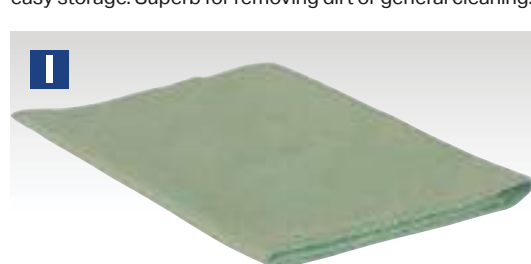

**I** Sheen Microfibre Cloth  
Model No. CC71  
Sheen Microfibre cloth attracts, holds and lifts dust from any surface. Double-sided cloth, particularly suitable for car interiors.  
Size: 400 x 400mm



**J** Forta Microfibre Cloth  
Model No. CC68  
Developed by professional detailers for fast removal of dust and wax from the car surface. Ultra-fine fibres attract, lift and hold dirt, dust and grease with just a little water.  
Size: 400 x 400mm



**K-L** Genuine Chamois  
Model No. SEE BELOW  
Genuine chamois leathers are a superior professional product, cut, conditioned, sized and 100% cod oil tanned. Genuine chamois is soft, supple and will leave surfaces lint and scratch free.  
Model No: Size:  
K CC72 2.5ft²  
L CC73 3.5ft²



**M** Microfibre Clay Bar Cloth  
Model No. CBC01  
Clay backed microfibre cloth designed as an alternative to clay bar detailing. Perfect for removing surface contaminants such as tree sap, rain stains, light rust, pollen, and bugs leaving a smooth finish to your paint. High quality materials allow for extended use compared to using a regular clay bar. Designed for use with clay bar lubricants.  
Size: 300 x 300mm



### A 2000W Steam Cleaner 2L Tank Model No. VMSC01

2000W Steam cleaner with a 2L tank, ideal for small but stubborn stains. Using only tap water, this unit produces pressurized steam up to a maximum of 160°C which cleans, sanitizes and sterilizes. Heats up to full temperature in only 7 minutes. Steam leaves no toxic residues as opposed to chemical cleaning. Includes a variety of accessories for multiple cleaning tasks. This machine is excellent for cleaning carpets and upholstery, alloy wheels, car interiors, floors, mirrors, glazed areas, service and toilet areas.

<b>Power:</b>	2000W
<b>Tank Capacity:</b>	2L
<b>Maximum Operating Temperature:</b>	160°C
<b>Warm Up Time:</b>	7min
<b>Maximum Working Pressure:</b>	5bar(72.5psi)
<b>Supply:</b>	230V
<b>Accessories:</b>	2pc Extension Tube (1 Small + 1 Long), Floor Scrub Brush, Floor Scrub Brush Cleaning Cloth, Floor Scrub Brush Adaptor, Small Tip Adaptor, Medium Brush, Small Brush, Small Power Jet Tip – Angled, Rotating Brush, Window Squeegee, Cloth for Window Squeegee, Extension Tube Holder, Funnel and Measuring Jug.

**A NEW**

**2L Capacity**

**2000W**



**B**



### B Pressure Washer Accessory Kit Model No. PCKIT

**Contents:** Extension Lance (x2), Safety Goggles, Rotary Brush, Fixed Brush, Surface Brush, Drain Cleaner Kit, Fan Spray Nozzle, Angle Connector (x2), Hex Key

**C**



### C Water Broom Model No. PCAK09

**D**



### D 4.5m Sand Blasting Kit Model No. PCAK13

**E**



### E Upholstery/Body Cleaning Gun Model No. BS101

Designed for the car dealer and professional valeting, this essential tool cleans hard-to-reach areas such as seat runners, door trims, dashboards, upholstery and bodywork. Tornado action lifts dirt out of upholstery.

<b>Air Pressure:</b>	101-116psi(7-8bar)
<b>Air Consumption:</b>	6.35cfm
<b>Air Inlet Size:</b>	1/4" BSP

**F**



**Telescopic 0.9-1.7m**

Replacement Brush Head available, Model No. CC50BH

### F 1.7m Large Angled Flo-Thru Brush with Telescopic Handle Model No. CC50

Manufactured from tough, lightweight structural plastic that will not crack, bend or break. Super-soft synthetic bristles are safe to use on any surface. Leak resistant aluminium handle with flo-thru feature gives fast and thorough cleaning.

<b>Handle Extension:</b>	900-1700mm
<b>Replacement Flo-Thru Brush Head:</b>	CC50BH

**G**



**Telescopic 1.3-3m**

Replacement Brush Head available, Model No. CC953BH

### G 3m 5-Sided Flo-Thru Brush with Telescopic Handle Model No. CC953

Manufactured from tough, lightweight structural plastic that will not crack, bend or break. Telescopic handle extends up to 3m. 5-Sided brush head for all-over coverage, prevents potential damage from objects butting up against the plastic brush head. Super-soft synthetic bristles are safe to use on any surface. Leak resistant aluminium handle with flo-thru feature gives fast and thorough cleaning.


<b>Handle Extension:</b>	1300-3000mm
<b>Replacement Flo-Thru Brush Head:</b>	CC953BH



**A Water Spray Gun - 9 Pattern**  
**Model No. CC79**  
Soft rubber grip handle with locking trigger on/off switch. Rotating spray head gives nine different options - straight, jet, mist, shower, angle, flat horizontal, flat vertical, fan and tap.



**B Water Spray Gun**  
**Model No. CC86**  
Manufactured from lightweight plastic with soft rubber grip handle. Features two adjustable pressure settings and flow rate control nozzle. Fitted with male inlet coupling.

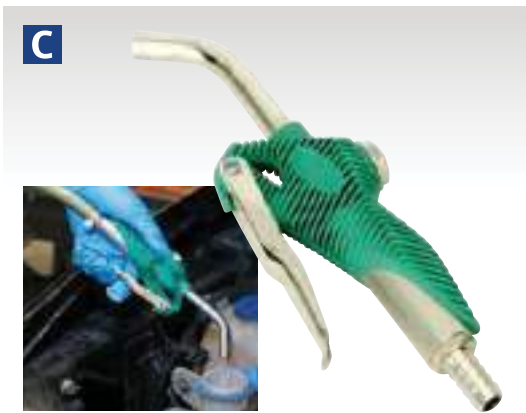

**C Water Dispensing Gun**  
**Model No. SA928**  
Connects to water hose for dispensing mains pressure water.  
**Water Inlet Size:** Ø1/2"



**D NEW HEAVY DUTY**  
**Hex Heavy-Duty Hot & Cold Rubber Water Hoses**  
**Model No. SEE BELOW**  
Lightweight and extremely durable. Designed for all agricultural and workshop applications. Will withstand and remain flexible in extreme conditions from -40°C to 90°C. Constructed with high strength polyester braided reinforcement. High flow Ø19mm hexagonal hose can handle hot water up to 90°C, making it ideal for livestock and farming applications. Fitted with 3/4.BSP brass fittings to fit conventional water outlets. High pressure rating of 500psi.

Model No:	Length:	Hose Diameter:
HWH5M	5m	Ø19mm
HWH15M	15m	Ø19mm
HWH30M	30m	Ø19mm
HWH50M	50m	Ø19mm



**E NEW HEAVY DUTY**  
**Heavy-Duty Hose Reel Cart**  
**Model No. HRCHD**  
Lightweight and durable tubular steel design. Perfect for keeping longer water hoses neat and tidy. Includes a 1.8m leader hose with 3/4"BSP brass fittings. Can hold up to 120m of Ø13mm standard water hose or 50m of Ø19mm H/D hose (hose not included). Features a non-slip handle and a storage basket for frequently used tools. Fitted with easy rolling 10" puncture proof PU wheels and solid axle for rough terrain.  
**Weight:** 18.5kg



**F NEW** 15m Ø13 mm ID  
**HEAVY DUTY Steel Case**  
**15m Heavy-Duty Retractable Water Hose Reel Ø13mm ID Rubber Hose**  
**Model No. WHR1512**  
Heavy-duty durable steel case. Fitted with heavy-duty 15m Ø13mm ultra-light, super-strong rubber hose with 2m leader hose. Features metal spray gun with nine pattern spray/jet nozzle. Finger grip bend restrictors for ease of use. Handles hot water up to 90°C and remains flexible in cold temperature as low as -40°C. Heavy-duty ratchet mechanism enables safe storage and use. Swivel wall mounting bracket included.  
**Hose Size (ID):** Ø13mm  
**Length:** 15m





**A** 60m Capacity

Hose not included.

**A Garden Hose Trolley 60m Capacity**  
Model No. GH60

Lightweight tubular steel frame with tough plastic snap-together parts - no tools required. Fitted with two composite wheels for easy manoeuvrability and two angled 1/2" hose connectors.

<b>Hose Capacity:</b>	60m x Ø13mm
<b>Inlet/Outlet Diameter:</b>	Ø13mm
<b>Weight:</b>	2kg



**D** 18m

**HEAVY DUTY**

**D 18m Retractable Water Hose Reel**  
Model No. RGH18

Heavy-duty durable composite case with carry handle. Fitted with 18m Ø12mm PVC hose with spray/jet nozzle. Heavy-duty ratchet mechanism enables safe storage and use. Supplied with wall mounting brackets.

<b>Length:</b>	18m
<b>Hose Diameter:</b>	Ø12mm



**B** Available Sizes  
15m  
30m  
80m

**B Water Hoses with Fittings**  
Model No. SEE BELOW

Three ply construction for extra strength. Includes spray/jet nozzle, female connector, waterstop connector and threaded tap connector.

<b>Model No:</b>	<b>Length:</b>	<b>Hose Diameter:</b>
GH15R/12	15m	Ø12mm
GH30R	30m	Ø13mm
GH80R	80m	Ø13mm



**E** 20m

Auto Layering



**E 20m Water Hose Reel**  
Model No. WR92

Manufactured from durable lightweight material. Reinforced PVC hose with Ø13mm bore. Incorporates a soft grip handle for easy manoeuvrability or use preset holes for wall mounting. Suitable for use with pressure washers. Supplied with variable nozzle and tap connection.

<b>Length:</b>	20m
<b>Hose Diameter:</b>	Ø13mm



**C** 80m Capacity

**HEAVY DUTY**

**C Hand Cranked Hose Reel 80m Capacity**  
Model No. GH80

Heavy-duty steel open style construction with mounting bracket for fixing to wall or floor. Suitable for industrial applications or areas where longer length of hose is required. Will hold up to 80m(260ft) of Ø13mm hose. Supplied with PTFE tape for fitting the valve.

<b>Hose Capacity:</b>	80m x Ø13mm
<b>Inlet/Outlet Diameter:</b>	Ø13mm
<b>Maximum Pressure:</b>	300psi(20bar)
<b>Weight:</b>	9kg



**F** 20m  
30m

Controlled Rewind

Length Control Auto Layering

**F Auto-Rewind Control Garden Hose Reels**  
Model No. SEE BELOW

Composite housing with heavy-duty wall mounting swivel bracket. Fitted with high quality Ø13mm PVC garden hose with spray/jet nozzle. Innovative design features three key points. Hose can be extended and stopped at any length. Controlled, slow rewind which, unlike traditional retractable reels, returns the water hose at a safe speed. Auto-layering mechanism distributes water hose evenly back into reel housing preventing it from jamming. Supplied with 2m leader hose with quick coupler and tap connector. Available in 20m and 30m versions.

<b>Model No:</b>	<b>RWH20</b>	<b>RWH30</b>
<b>Length:</b>	20m	30m
<b>Hose Diameter:</b>	Ø13mm	Ø13mm



## A 10L 1000W Wet & Dry Vacuum Cleaner Model No. PC102HV

High powered, lightweight, wet and dry unit with blower facility. Constructed from high impact composite material with tool and hose storage points on head, and four castors to aid manoeuvrability. Ideal for vehicle cleaning, home cleaning and general workshop use. Supplied with crevice and floor tools, washable cloth filter, 3m cable and 3-pin plug.

Motor Power:	1000W
Supply:	230V
Airflow:	78m³/hr
Drum Size:	10L
Weight:	4.1kg
Vacuum Accessories Diameter:	Ø32mm

Filter Type:	Cloth
Washable Cloth Filter:	PC102CF



## C 10L 1000W Wet & Dry Vacuum Cleaner Model No. PC100

High powered, lightweight, wet and dry unit with blower facility. Constructed from high impact composite material with tool and hose storage points on head. Ideal for vehicle cleaning and general workshop use. Supplied with crevice and floor tools, cloth and foam filters, 2m cable and 3-pin plug.

Motor Power:	1000W
Supply:	230V
Airflow:	90m³/hr
Drum Size:	10L
Weight:	3.3kg
Vacuum Accessories Diameter:	Ø35mm

Filter Type:	Cloth & Foam
Replacement Filter Bag:	PC100.ACC4
Replacement Foam Filter:	PC100.ACC2



## F 15L 1000W/230V Ash Vacuum Cleaner Model No. PC150A

Ideal for the collection of ash or fire debris from fireplaces, stoves, wood burners, BBQs, grills and more. A powerful 1000W motor provides great suction performance. With a 15L capacity, the lightweight tank features quick release clips for ease of emptying. A 1m flexible metal lined suction hose allows the suction of ash up to a temperature of 40°C (100°F). Supplied with Model No. PC150ACF HEPA Cartridge Filter, Model No. PC150ACLF Cloth Filter, crevice tool and extension tube.



Motor Power:	1000W
Supply:	230V
Maximum Vacuum Pressure:	185mbar
Airflow:	102m³/hr
Drum Size:	15L
Weight:	3.5kg
Vacuum Accessories Diameter:	Ø38mm
Filter Type:	Cartridge, Cloth
Replacement Cartridge Filter:	PC150ACF
Replacement Cloth Filter:	PC150ACLF

## G HEPA Cartridge Filter for PC150A Model No. PC150ACF

Two layer HEPA cartridge filter for fine ash particles. For use with Model No. PC150A.



## H Cloth Filter for PC150A Model No. PC150ACLF

Cloth filter for fine ash particles. For use with Model No. PC150A.



**A** 20L Wet & Dry Vacuum Cleaner 1250W  
Model No. PC200

High powered, lightweight unit with blower facility. Constructed from high impact plastic, the drum unit is mounted on two castor and two fixed wheels. Tool storage points on head and base. Supplied with 4m cable with 3-pin plug, tool kit, cartridge filter and wet-use foam filter.

Motor Power:	1250W
Supply:	230V
Maximum Vacuum Pressure:	140mbar
Airflow:	120m³/hr
Drum Size:	20L
Weight:	5kg
Vacuum Accessories Diameter:	Ø35mm

Filter Type: Cartridge

<b>C</b> Replacement Cartridge Filter:	PC200CFL
Replacement Foam Filters (Pack of 10):	PC200FF10
Optional Dust Bags (Pack of 5):	PC200PB5



**B** 30L Wet & Dry Vacuum Cleaner 1100W  
Model No. PC300

High powered, lightweight unit with blower facility. Constructed from high impact plastic, the drum unit is mounted on four castor wheels. Tool storage points on the base. Supplied with 4m cable with 3-pin plug, tool kit, wet and dry cartridge filter.

Motor Power:	1100W
Supply:	230V
Maximum Vacuum Pressure:	165mbar
Airflow:	128m³/hr
Drum Size:	30L
Weight:	6.66kg
Vacuum Accessories Diameter:	Ø48mm

Filter Type: Cartridge

<b>D</b> Replacement Cartridge Filter:	PC300V2CF
<b>E</b> Optional Dust Bags (Pack of 3):	PC300V2DB




**C** Fine Dust Cartridge Filter  
Model No. PC200CFL

Cartridge filter for fine particles down to 1micron. Suitable for use with PC200 Series.



**D** Plastic Filter Cartridge for PC300  
Model No. PC300V2CF

Plastic filter cartridge for Model No. PC300 Vacuum Cleaner.

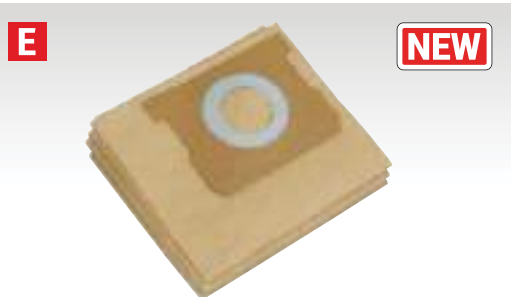

**E** Dust Bag for PC300 - Pack of 3  
Model No. PC300V2DB

Dust bag for Model No. PC300 Vacuum Cleaner.



**F** 1500W Wall Mounting Garage Vacuum with Remote Control  
Model No. GV180WM

Robust, wall mounting, remote control, wet and dry vacuum cleaner. Fitted with a powerful 1500W motor and noise diffuser, this unit is ideal for use in garage and workshop environments. Features an 8m spring hose, ideal for double garages. Also features remote control buttons on nozzle to allow the user to turn the unit on/off without leaving the cleaning area. Includes 5m power cable, extension lances (x2), combo brush, round brush, deluxe car nozzle, crevice tool, washable cartridge filter, foam filter and dust bag. Innovative design allows these accessories to be stored away, keeping your work area clean and tidy.

Motor Power:	1500W
Supply:	230V
Maximum Vacuum Pressure:	165mbar
Airflow:	71.28m³/hr
Drum Size:	18L
Weight:	10.7kg
Vacuum Accessories Diameter:	Ø35mm
Filter Type:	Cartridge
Replacement Cartridge Filter:	GV180WM.27
Replacement Foam Filter:	GV180WM.26
Replacement Dust Bag:	GV180WM.18





**A** 20L Wet & Dry Industrial Vacuum Cleaner  
1250W/110V Stainless Drum  
Model No. PC200SD110V

High powered, lightweight industrial unit with blower facility. Constructed from stainless steel, the drum unit is mounted on two castor and two fixed wheels. Tool storage points on head and base. Supplied with 4m cable and 110V plug, deluxe tool kit, including stainless steel telescopic rigid extension tubes, cartridge filter and wet-use foam filter.

Motor Power:	1250W
Supply:	110V
Maximum Vacuum Pressure:	125mbar
Airflow:	173m³/hr
Drum Size:	20L
Weight:	5kg
Vacuum Accessories Diameter:	Ø35mm
Filter Type:	Cartridge
Replacement Cartridge Filter:	PC200CFL
Replacement Foam Filters (Pack of 10):	PC200FF10
Optional Dust Bags (Pack of 5):	PC200PB5



**D** 60L Wet & Dry Vacuum Cleaner  
1600W Stainless Drum  
Model No. PC460

Industrial stainless steel drum with tough composite base and head. Supplied with 3.5m EVA crush resistant hose, combo nozzle, crevice tool, 380mm squeegee, vac brush, accessory tool tidy, stainless steel rigid tubes, cartridge filter and foam filter. Tank has easy empty drain cap with screw-on hose. Fitted with two castor and two fixed wheels. Cable storage hooks mounted on frame, accessories and extension tube holders on base.

Motor Power:	1600W
Supply:	230V
Drum Size:	60L
Weight:	16kg
Vacuum Accessories Diameter:	Ø38mm
Filter Type:	Cartridge
Replacement Cartridge Filter:	PC200CFL
Replacement Foam Filter:	PC460.ACC7



**B - C** Wet & Dry Industrial Vacuum Cleaners 1400W with Stainless Drum & Auto Start  
Model No. SEE BELOW

Powerful 1400W motor head gives incredible suction through Ø35mm hosing. May also be used as a blower. Integral 3-pin socket provides power supply for dust-free tools up to 1400W. When operating in conjunction with a power tool, the cleaner automatically starts with the tool and stops ten seconds after the tool is switched off, to ensure tool and hose are left free of dust. Stainless steel drum on two castor and two fixed wheels, stainless steel telescopic rigid extension tube as well as tools for wet and dry operations. Tool storage points on head and base, supplied with cartridge filter and wet-use foam filter.

	<b>B</b>	<b>C</b>
Model No:	PC200SDAUTO	PC300SDAUTO
Motor Power:	1400W	1400W
Supply:	230V	230V
Maximum Vacuum Pressure:	165mbar	165mbar
Airflow:	120m³/hr	120m³/hr
Drum Size:	20L	30L
Weight:	8kg	9kg
Vacuum Accessories Diameter:	Ø35mm	Ø35mm
Filter Type:	Cartridge	Cartridge
Replacement Cartridge Filter:	PC200CFL	PC200CFL
Replacement Foam Filters (Pack of 10):	PC200FF10	PC200FF10
Optional Dust Bags (Pack of 5):	PC200PB5	PC300PB5



**E** Vacuum/Dust-Free Tool Adaptor  
Model No. DFS/AK10

Inner Diameter:	Ø35mm
Outer Diameter:	Ø35, 32, 27mm



**F** 5m Vacuum Hose  
Model No. VACHOSE5M

5m Vacuum hose extension.	
Inlet/Outlet Diameter:	Ø56/35mm
Applications:	PC195SD, PC200, PC200SD, PC200SDAUTO, PC200SD110V, PC300, PC300SD, PC300SDAUTO





**A - B 1000W Low Noise Wet & Dry Vacuum Cleaners**  
Model No. **SEE BELOW**

High powered, lightweight, wet and dry units with blower facility. Low noise motor reducing sound down to 80db. Constructed with a high impact metal drum and four castors to aid manoeuvrability. Ideal for vehicle cleaning, home cleaning and general workshop use. Supplied with crevice and floor tools, washable cloth filter, 4m cable and 3-pin plug.

	<b>A</b>	<b>B</b>
Model No:	PC20LN	PC30LN
Drum Size:	20L	30L
Filter Type:	Cartridge	Cartridge
Maximum Vacuum Pressure:	190mbar	190mbar
Motor Power:	1000W	1000W
Supply:	230V	230V
Vacuum Accessories Diameter:	Ø35mm	Ø35mm
Optional Accessories:	Cloth Filter Cartridge - PCLNCF, Foam Filter Cartridge - PCLNFF, Dust Bag - PC20LNDB	Cloth Filter Cartridge - PCLNCF, Foam Filter Cartridge - PCLNFF, Dust Bag - PC30LNDB



**C Cloth Filter Cartridge for PC20LN & PC30LN**  
Model No. **PCLNCF**

Cloth filter cartridge for Model No's PC20LN & PC30LN vacuum cleaners.



**D - E Dust Bag - Packs of 5**  
Model No. **SEE BELOW**

Model No:	Application:
<b>D</b> PC20LNDB	PC20LN
<b>E</b> PC30LNDB	PC30LN



**Drain Cap**

Model No's PC30LN, PC200SD and PC300SD are fitted with a drain cap for easy fluid disposal.



**F 20L Wet & Dry Vacuum Cleaner**  
1200W Stainless Drum  
Model No. **PC195SD**

High powered, lightweight unit with blower facility. Constructed from stainless steel, the drum unit is mounted on four castor wheels. Tool storage points on head and base. Supplied with 4m cable, 3-pin plug and accessory toolkit, including three rigid extension tubes, cartridge filter, wet-use foam filter and cloth filter.



**G 20L Wet & Dry Industrial Vacuum Cleaner**  
1250W Stainless Drum  
Model No. **PC200SD**

High powered, lightweight industrial unit with blower facility. Constructed from stainless steel, the drum unit is mounted on two castor and two fixed wheels. Tool storage points on head and base. Supplied with 4.5m cable with 3-pin plug, deluxe tool kit, including stainless steel telescopic rigid extension tube, cartridge filter and wet-use foam filter.



**H 30L Wet & Dry Industrial Vacuum Cleaner**  
1400W Stainless Drum  
Model No. **PC300SD**

High powered, lightweight industrial unit with blower facility. Constructed from stainless steel, the drum unit is mounted on two castor and two fixed wheels. Tool storage points on head and base. Supplied with 4.5m cable with 3-pin plug, deluxe tool kit, including stainless steel telescopic rigid extension tube, cartridge filter and wet-use foam filter.

	<b>F</b>	<b>G</b>	<b>H</b>
Model No:	PC195SD	PC200SD	PC300SD
Motor Power:	1200W	1250W	1400W
Supply:	230V	230V	230V
Maximum Vacuum Pressure:	172mbar	140mbar	160mbar
Airflow:	126m³/hr	120m³/hr	120m³/hr
Drum Size:	20L	20L	30L
Weight:	5.5kg	5kg	7.4kg
Vacuum Accessories Diameter:	Ø32mm	Ø35mm	Ø35mm
Filter Type:	Cartridge	Cartridge	Cartridge
Replacement Cartridge Filter:	PC195SDCFL	PC200CFL	PC200CFL
Replacement Foam Filters (Pack of 10):	PC195SDFF10	PC200FF10	PC200FF10
Optional Dust Bags (Pack of 5):	-	PC200PB5	PC300PB5





### A 77L Wet & Dry Industrial Vacuum Cleaner 2400W Stainless Steel Drum with Swivel Emptying Model No. PC477

High powered, lightweight industrial unit. Stainless steel drum with dual filtration system for superior performance. Features safety shut-off for wet operation. Trolley with swivel drum and two rear locking wheels for easy emptying plus front swivel castors for added manoeuvrability. Supplied with Ø38mm accessory kit, 3.2m cable with 3-pin plug, cloth and cartridge filters. Fitted with twin motors offering superior vacuuming power. Particularly suitable for industrial and commercial applications where extra capacity and power are required. Optional front mounting squeegee available (as illustrated right).

Motor Power:	2 x 1200W
Supply:	230V
Airflow:	174m³/hr
Drum Size:	77L
Weight:	39kg
Vacuum Accessories Diameter:	Ø38mm
Filter Type:	Cartridge, Cloth
Replacement Cartridge Filter:	PC477.PF
Replacement Cloth Filter Assembly:	PC477.CF
Optional Squeegee:	PC477AK1

A  
2400W  
77L  
230V  
STAINLESS  
STEEL

Wet & Dry



Features swivel drum for easy emptying.



Optional Front Mounting Squeegee, order Model No. PC477AK1.

### B 30L Bagless Wet & Dry Industrial Vacuum Cleaner 1200W Stainless Steel Drum Model No. PC300BL

High powered industrial unit features cyclonic technology. Bagless design prevents loss of suction improving efficiency. Outlet produces clean air suitable for use as a blower. Features safety shut-off for wet operation. Includes a strong, comfortable handle, hose brackets, accessory storage base, durable stainless steel tank, liquid drainage device and an 'auto power take off' socket. Supplied with 3.8m cable.

Motor Power:	1200W
Supply:	230V
Maximum Vacuum Pressure:	180mbar
Drum Size:	30L
Weight:	11kg
Vacuum Accessories Diameter:	Ø35mm
Replacement Foam Filters (Pack of 10):	PC300BLFF10
Replacement Panel Filter (Single):	PC300BLPF

B  
Wet & Dry  
STAINLESS  
STEEL  
30L  
1200W  
230V



C




### C Panel Filter for PC300BL Model No. PC300BLPF

Panel filter for Model No. PC300BL



### Performance of Bagless Against Regular Models

Bagless models do not suffer from loss of suction as the tank fills with debris. Tests prove they retain their suction power and can be up to 50% more efficient than regular filter/cartridge models.

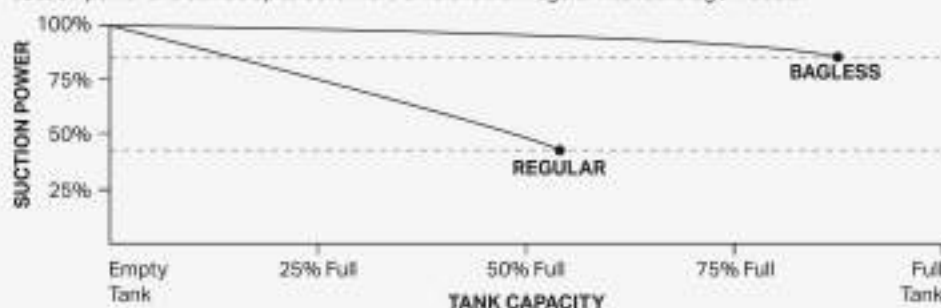



# **A - B 38L Dust-Free Wet & Dry Industrial Vacuum Cleaners Stainless Steel Drum M Class Filtration**

**Model No. SEE BELOW**

230V M Class wet and dry vacuum cleaners with a 38L stainless steel drum. Removes 99.9% of hazardous dust with the exposure limit value of  $>0.1\text{mg/m}^3$ . When the air velocity starts to fall below 20 metres per second, a visual LED warning light on the top of the units will show. Built-in push clean system that forces air back through the filter restoring the suction power. These vacuum cleaners use a combination of filters and lining bags to create a 2-stage collection to stop any hazardous dust being left in the tank or becoming airborne. There is also the option of using a foam filter for wet cleaning which is reusable (all consumables are included: Tank liners (x5), dust bags (x5) and a foam filter). The accessories included are an antistatic crevice tool, antistatic round brush, multi-surface floor nozzle 12" and power tool adaptor.

	<b>A</b>	<b>B</b>
Model No:	PC380M	PC380M110V
Drum Size:	38L	38L
Drum Type:	Stainless Steel	Stainless Steel
Maximum Vacuum Pressure:	25Kpa	22Kpa
Motor Power:	1500W	1100W
Supply:	230V	110V



**C Foam Filter - Pack of 3**  
**Model No. PC380MFF**

Suitable for Model No's PC380M and PC380M110V Industrial Vacuum Cleaners.



**D M Class Dust Bag - Pack of 5**  
**Model No. PC380MDB**

Suitable for Model No's PC380M and PC380M110V Industrial Vacuum Cleaners. 38L Capacity.



**E M Class Tank Liner - Pack of 5**  
**Model No. PC380MTL**

Suitable for Model No's PC380M and PC380M110V Industrial Vacuum Cleaners. 38L Capacity.



**F M Class Cartridge Filter**  
**Model No. PC380MCF**

Class M cartridge filter suitable for Model No's PC380M and PC380M110V Industrial Vacuum Cleaners.

# **G 20L 20V Rechargeable Wet & Dry Vacuum Cleaner - Body Only** **Model No. PC20SD20V**

Extremely lightweight, portable, cordless wet and dry vacuum cleaner. Convenient for use in the home, workshop or car, especially where mains power is not easily accessible. Features a 20L stainless steel drum mounted on four swivel castors for easy manoeuvrability. Unit also has built-in blower function which can be used for many applications in the home, workshop or garden. Body only. Supplied with comprehensive accessory pack. Requires compatible 20V battery and mains charger, sold separately.

Motor Power:	140W
Supply:	20V
Maximum Vacuum Pressure:	80mbar
Airflow:	65m³/hr
Drum Size:	20L
Weight:	3.7kg
Vacuum Accessories Diameter:	Ø32mm
Replacement Bag Filters (Pack of 5):	PC20SD20VCF
Replacement Foam Filters (Pack of 10):	PC20SD20VFF10



## **Combo Kits**

See pages 834 to 840 for our range of 20V Combo Kits



## **20V Accessories** **Model No. SEE BELOW**

For our 20V 'One Battery Fits All' range, see pages 828 to 840.

Model No:	PC20SD20V	Running Time:	Description:
CP20VBP2	Approx. 15 minutes	2Ah Li-ion Battery	
CP20VBP4	Approx. 27 minutes	4Ah Li-ion Battery	
CP20VBP6	Approx. 40 minutes	6Ah Li-ion Battery	
CP20VMC	n/a	Battery Charger	



**What is M Class?**

The HSE recommend that you use a minimum of a M Class extraction unit if you are working with fine dusts in a construction or woodworking environment.

M Class filters catch 99.9% of wood dust & other dusts with OEL (Occupational Exposure Limit) values of  $>0.1\text{mg/m}^3$  with a maximum permeability of 0.1%. For more information, and advice for using the correct filtration, please visit the HSE government website.

### A - C 35L Wet & Dry M Class Filtration Industrial Vacuum Cleaners

Model No. SEE BELOW

High powered units designed for use with power tools. Model No. DFS35M is also suitable for use with air power tools. Certified for Class M dust extraction in accordance with EU directives, which protects the operator from dust particles hazardous to health. Supplied with Ø36mm flexible hose, crevice tool, multi-diameter tool adaptor, power tool cord clamps, Class M bag filter, Class M cartridge filter and foam filter. PC35110V & PC35230V are also supplied with inserts for liquid collection and hard floors. Can be set to continuous suction or in synchronisation with a power tool via an electronically controlled outlet or pneumatic tool via the air outlet (DFS35M only). Fitted with a self-cleaning filter technology designed to prevent filter blockages whilst in use. Fitted with four castors for manoeuvrability. A wet & dry floor cleaning kit is available for Model No. DFS35M, order Model No. DFS35MKIT (see F below).

	A	B	C
Model No:	PC35230V	PC35110V	DFS35M
Motor Power:	1200W	1200W	1000W
Supply:	230V	110V	230V
Power Tool Capacity:	2000W	700W	2000W
Maximum Vacuum Pressure:	240mbar	240mbar	220mbar
Airflow:	216m³/hr	216m³/hr	180m³/hr
Drum Size:	35L	35L	35L
Drum Type:	Plastic	Plastic	Plastic
Weight:	10.5kg	10.5kg	11.5kg
Vacuum Accessories Diameter:	Ø36mm	Ø36mm	Ø10-35mm



**D M Class Cartridge Filter**  
Model No. DFS35CF

Applications: DFS35M, PC35230V, PC35110V



**E Foam Filter**  
Model No. DFS35FF

Applications: DFS35M, PC35230V, PC35110V



**F Floor Kit Accessories for DFS35M**  
Model No. DFS35MKIT

Contents: 1.8m Ergonomic Hose, 2pc Aluminium Extension Tubes, Floor Brush Head, Liquid Insert, Hard Floor Insert



**G M Class Dust Bag - Pack of 5**  
Model No. DFS35PB

Applications: DFS35M, PC35230V, PC35110V



**A 20L Wet & Dry Valeting Machine with Accessories 1250W**  
**Model No. PC310**

Cleans carpets, car interiors, fabrics and upholstery. Constructed from high impact plastic which is dent resistant and rustproof. Supplied with carpet lance, handheld lance, full wet and dry vacuum accessory kit, including stainless steel telescopic rigid extension tube, cartridge filter and foam filter. Powerful pump forces cleaning fluid into fabric/ carpet and 1250W suction power leaves surface virtually dry after one pass. Features safety shut-off for wet operation. Large capacity drum with external detergent tank for easy filling. Fitted with two fixed wheels and two castors. Cable storage hook, accessories and extension tube holders on head, plus additional accessory storage slots on base.

<b>Motor Power:</b>	1250W
<b>Supply:</b>	230V
<b>Drum Size:</b>	20L
<b>Drum Type:</b>	Plastic
<b>Weight:</b>	8.2kg
<b>Filter Type:</b>	PET Type Cartridge
<b>Replacement Cartridge Filter:</b>	PC310CF
<b>Optional Dust Bags (Pack of 5):</b>	PC200PB5



**B Carpet/Upholstery Detergent**  
**Model No. SEE BELOW**

We recommend only Sealey cleaning products be used with valeting equipment. These chemical agents are specially formulated for use in Sealey valeting systems and provide powerful, non-corrosive cleaning power.

Model No:	Pack Qty:	Description:
<b>VMR921S</b>	1 x 1L	Upholstery Detergent
<b>VMR921</b>	10 x 1L	Upholstery Detergent
<b>VMR925S</b>	1 x 5L	Upholstery Detergent
<b>VMR925</b>	4 x 5L	Upholstery Detergent



PC310 Supplied with full accessory kit.



**C-D 30L Wet & Dry Valeting Machines**  
**Model No. SEE RIGHT**

High powered units ideal for cleaning carpets, car interiors, fabrics and upholstery. Supplied with carpet lance, handheld lance, full wet and dry vacuum accessory kit including stainless steel rigid extension tube, cartridge filter and foam filter. Large capacity drum with external detergent tank for easy filling. Features remote operation controls on nozzle, enabling switching between vacuum and detergent modes uninterrupted. Fitted with two fixed wheels and two castors. Model No. VMA915 includes cable storage hooks and accessory storage slots.



Switch controls on nozzle allow remote operation of detergent pump and vacuum motor.

Model No:	VMA914	VMA915
<b>Motor Power:</b>	1300W	1500W
<b>Supply:</b>	230V	230V
<b>Drum Size:</b>	30L	30L
<b>Drum Type:</b>	Plastic	Stainless Steel
<b>Weight:</b>	10kg	13kg
<b>Replacement Foam Filter:</b>	PC200FF10	PC200FF10
<b>Replacement Dust Collection Bag (Pack of 5):</b>	PC300PB5	PC300PB5
<b>Replacement Cartridge Filter:</b>	PC310CF	PC310CF

## A - B Floor Sweepers

Model No. SEE BELOW

Suitable for cleaning any hard floor and ideal for removing dirt, dust and debris from large surface areas. Features 4-brush system, consisting of two side brushes and two further brushes set underneath the unit to easily lift debris into the hopper. Fitted with tubular handle and adjustable castor wheel that raises the sweeper 20mm enabling larger pieces of debris to be swept up.

	A	B
Model No:	FSW70	FSW80
Operating Width:	700mm	800mm
Hopper Capacity:	20L	40L



## C Metal Dustpan & Brushes

Model No. BM26

Ideal for a wide variety of domestic and workshop jobs. Supplied with 11"(280mm) soft and hard bristle brushes. Heavy-duty, metal dustpan suitable for picking up dirt, dust and larger debris. Fitted with carry handle.



## D Composite Dustpan & Brush Set

Model No. BM04

Manufactured from quality composite material for strength and durability. Brush features long life flexible bristles and locks onto pan for easy storage. Pan features rubber squeegee edge to ensure all dirt can be swept up with ease.



## E 7.2V Rechargeable Wet & Dry Vacuum Cleaner

Model No. CPV72

Ideal for quick clearing up of spillages. Convenient for use in the home, workshop or car. Built-in crevice tool for wet and dry pick-up. Includes detail brush, squeegee brush, storage bag and reusable filter. Features removable collection chamber for easy disposal of waste.

Supply:	7.2V
Charging Time:	3-5hr
Weight:	0.8kg
Replacement Dust Bag:	CPV72.08
Replacement Filter:	CPV72.01



## F 8"(200mm) Scrubbing Brush

Model No. BM27

Heavy-duty 8" scrubbing brush manufactured from hardwood. Contains stiff bassine fibres, great for rough surfaces. Suitable for indoor and outdoor use on patios, block paving, decking and laminate flooring.

Type/Fill:	Hard/Bassine
Head Size:	8"(200mm)



## G - H 11" Hand Brushes

Model No. SEE BELOW

Manufactured from hardwood with a clear lacquered finish. Features ergonomic handle and hanging hole for easy storage.

Model No:	Head Size:	Bristle Type:
G BM25H	11"(280mm)	Hard
H BM25S	11"(280mm)	Soft



## I Bulldozer Yard Dustpan & Brush Set

Model No. BM04HX

Hard-wearing, dual purpose, split-tip polypropylene and PVC fibres ideal for indoor and outdoor surfaces. Stiff inner fibres sweep concrete, asphalt and other rough surfaces. Soft outer fibres are ideal for sweeping fine dirt and dust. Brush locks on to pan for easy storage. Large industrial pan with a rubber squeegee edge to ensure all media can be swept with ease.

Type/Fill:	Hard & Soft/PVC-Polypropylene
Head Size:	180 x 80mm





**A - I Brooms**  
Model No. [SEE BELOW](#)

Comprehensive range of brooms available in hard and soft bristles. 12"(300mm) Models have handle support bracket and 24"(600mm) and 36"(900mm) models have metal handle strengthening support. Ideal for indoor or outdoor use. Model No. BM13H is suitable for heavy-duty use in yards and gardens.

Model No:	Type/Fill:	Head Size:
A BM11S	Soft/PVC	11"(280mm)
B BM12H	Hard/Bassine	12"(300mm)
C BM12S	Soft/Coco	12"(300mm)
D BM13H	Hard/PVC	13"(325mm)
E BM13HX	Hard/Cane	13"(325mm)
F BM24H	Hard/Bassine	24"(600mm)
G BM24S	Soft/Coco	24"(600mm)
H BM36H	Hard/Bassine	36"(900mm)
I BM36S	Soft/Coco	36"(900mm)




**J 16"(405mm) Heavy-Duty Stiff/Hard Bristle Broom with Scraper**  
Model No. [BM16SC](#)  
16"(405mm) Heavy-duty, hard bristle broom fitted with handle support bracket. Ideal for indoor or outdoor use, particularly for heavy-duty use in yards and gardens. Also features scraper, ideal for ice and snow.

Head Size:	16"(405mm)
------------	------------




**K 24"(600mm) Bulldozer Yard Broom**  
Model No. [BM24HX](#)  
Hard-wearing, dual purpose, split-tip polypropylene and PVC fibres ideal for indoor and outdoor surfaces. Stiff inner fibres sweep concrete, asphalt and other rough surfaces. Soft outer fibres are ideal for sweeping fine dirt and dust. Features high quality steel handle with grip bracket to secure and prevent damage to handle and resin block. Fitted with handle storage clips for easy storage.

Type:	Hard & Soft
Fill:	PVC-Polypropylene
Head Size:	24"(600mm)

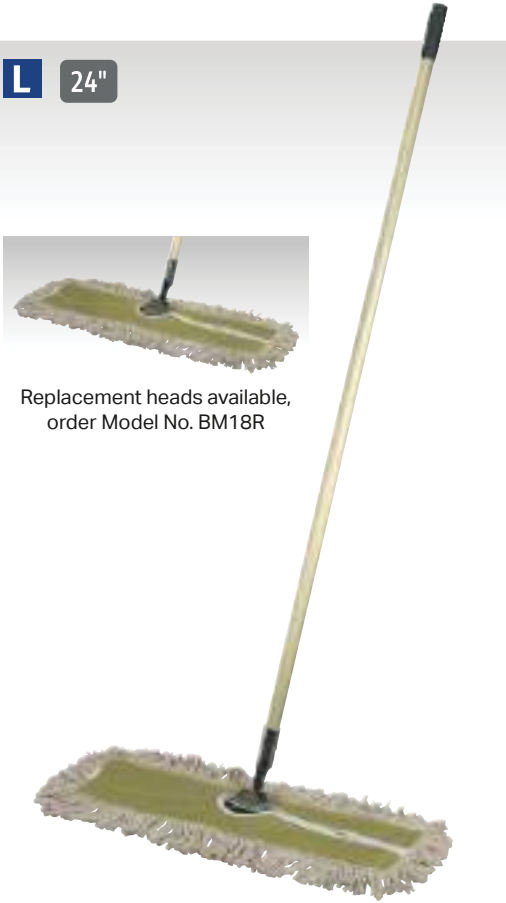

**L 24"(600mm) Floor Dust Sweeper**  
Model No. [BM18](#)  
Manufactured with 600mm highly absorbent head ideal for gathering dust particles over a large area. Fitted with 1390mm aluminium handle and metal locking clip. Replacement heads available.

Head Size:	600mm
Replacement Head:	BM18R

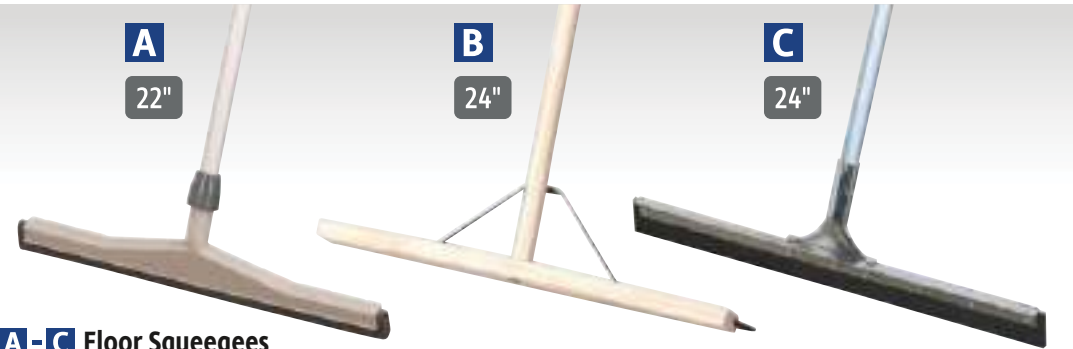

**A - C Floor Squeegees**  
Model No. [SEE BELOW](#)

Range of three floor squeegees, ideal for oil, water and other liquid spills. Model No. BM22FSP is fitted with foam strip and Model No's BM24RS and BM24RSM are fitted with rubber strip.

Model No:	Type/Fill:	Handle:	Head Size:
<b>A</b> BM22FSP	Foam	Aluminium	22"(560mm)
<b>B</b> BM24RS	Rubber	Wood	24"(600mm)
<b>C</b> BM24RSM	Rubber	Aluminium	24"(600mm)

**F - H Window Cleaning Wipers**  
Model No. [SEE BELOW](#)

Heavy-duty composite handles fitted with detachable rubber blade. Ideal for removing excess liquid from glass and other similar surfaces. Features twist lock system for easy removal of blade.


Model No:	Blade Length:
<b>F</b> BM2910	250mm
<b>G</b> BM2914	350mm
<b>H</b> BM2918	450mm



**I Squeeze Mop**  
Model No. [BM06](#)

Plastic housed squeegee mop. Supplied with 8" super absorbent sponge. Fitted with handle mounted lever for wringing of sponge. Ideal for use on tiles, marble and other smooth surfaces.


Replacement Sponge:	BM06R
---------------------	-------

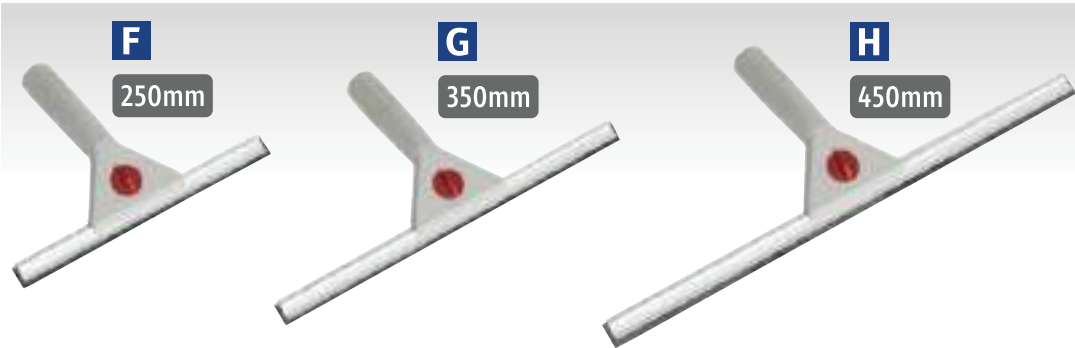

**J Aluminium Mop with Disposable Head**  
Model No. [BM14](#)

Allows for effortless cleaning when dealing with oil or other viscous substances. Mop head is completely removed and replaced by twisting the threaded mop handle.

Head Weight:	200g
Replacement Head (Pack of 5):	DKM05

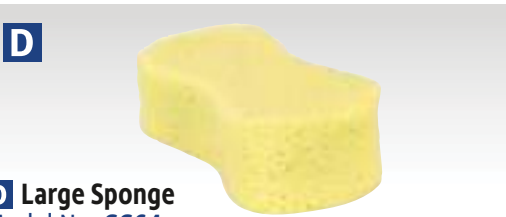

**D Large Sponge**  
Model No. [CC64](#)

See page 1104 for full details.



**E Forta Microfibre Cloth**  
Model No. [CC68](#)

See page 1104 for full details.



**K Disposable Mop Head - Pack of 5**  
Model No. [DKM05](#)

Pack of 5 disposable Kentucky mop heads for use with Model No. BM14. Designed for single use before disposing.

Head Weight:	200g each, 1kg per pack
--------------	-------------------------



**Spill Control Kits**

For our range of Spill Control Kits see page 653.





**A** 225g Pure Yarn Cotton Mop  
Model No. BM02

Highly absorbent, 100% pure yarn cotton head. Features straight grained wooden handle with galvanized steel socket.

Head Weight:	225g
--------------	------



**B** 340g Pure Yarn Cotton Mop  
Model No. BM05

Highly absorbent, 100% pure yarn cotton head. Features straight grained wooden handle with galvanized steel socket.

Head Weight:	340g
--------------	------



**C** 350g Cotton Mop  
Model No. BM17

Lightweight highly absorbent cotton head, ideal for cleaning wooden, ceramic, stone and vinyl flooring. Features detachable mop head and 1330mm plastic handle. Replacement mop head available separately, order Model No. BM17R.

Head Weight:	350g
--------------	------



**D** 450g Kentucky Mop  
Model No. BM03

Extra thick, highly absorbent, 100% cotton head. Features straight grained wooden handle with metal locking clip.

Head Weight:	450g
--------------	------



**E** Heavy-Duty Hand Wipes Textured  
Pack of 80  
Model No. SSW80

Heavy-duty textured hand wipes. Ideal for removing dirt, oil, grease, grime and non-cured petroleum based contaminants. Antimicrobial properties leave hands hygienically clean. Contains 80 sheets.

Quantity:	80
-----------	----



**F** Plain White Toilet Roll  
Pack of 4 x 9 (36 Rolls)  
Model No. TOL36

Embossed 2-ply soft toilet roll, wrapped in sleeves of four. Pack of 36 rolls.

Ply:	2
Type:	Embossed
Width:	95mm
Sheets on Roll:	320
Sleeve Quantity:	4 Rolls
Pack Quantity:	36 Rolls



**G** 300mm Workshop Floor Scraper  
Model No. WFS02

Heavy-duty floor scraper suitable for use in both domestic and industrial environments. Carbon steel blade ideal for removing grease, dirt and other remains from tiled, concrete and laminate flooring. Strong, lightweight fibreglass handle with comfortable grip.

Blade Size:	300mm
Length:	1500mm



**H** Hand Wipes Bucket - Pack of 150  
Model No. SCW3

Durable, extra-large wipes for removing a variety of tough substances including oil and grease. Moisture locked wipes means no need for water. Supplied in 3L dispensing bucket containing 150 wipes.

Quantity:	150
-----------	-----



**I** 150m Blue Embossed 2-Ply Paper Roll  
Pack of 6  
Model No. BLU150

Pack of six blue paper centre-feed 2-ply roll wipes.

Ply:	2
Type:	Embossed
Width:	190mm
Length:	150m
Pack Quantity:	6 Rolls



**A 12L Stainless Steel Mop Bucket**

Model No. **BM8L**

Manufactured from heavy-duty stainless steel grade 202. Perfect for domestic and industrial applications.

Capacity: 12L



**B 14L Galvanized Bucket**

Model No. **BM10**

Manufactured from heavy-duty galvanized steel. Fitted with carry handle. Ideal for domestic and industrial applications.

Capacity: 14L



**C 14L Composite Bucket**

Model No. **BM16**

Manufactured from highly durable thick walled polypropylene with pouring spout. Fitted with plastic comfort grip handle.

Capacity: 14L



**D 13L Galvanized Mop Bucket**

Model No. **BM08**

Manufactured from heavy-duty galvanized steel with a 13L capacity. Fitted with mop head wringer and carry handle. Ideal for domestic and industrial applications.

Capacity: 13L



**E - F 20L & 36L Mop Buckets**

Model No. **SEE BELOW**

Heavy-duty composite construction with detachable side press wringer and mop holder. Features Ø50mm non-marking castor wheels for added manoeuvrability. Both units fitted with carry handle.

Model No:	Capacity:
<b>E BM09</b>	20L
<b>F BM01</b>	36L



**G 15L Mop Bucket - 2 Compartment**

Model No. **BM07**

Manufactured with two compartments featuring removable mop head wringer. Ideal for keeping clean water and dirty water separate while cleaning. Fitted with carry handles.

Capacity: 15L



**H Janitorial Trolley**

Model No. **BM30**

Robust unit fitted with two castors and two rubber wheels. Designed to accommodate mop buckets, brooms, brushes, cleaning agents and other necessary items. Fitted with hooks to hang refuse bags and lid to contain any odours.

Dimensions (W x D x H): 470 x 1170 x 995mm



A - D 100L Refuse/Wheelie Bins  
Model No. SEE BELOW

Durable refuse/wheelie bins made from polypropylene. Bins are available in four different colours allowing you to set up your own colour-coding system. Alternatively, common colour-coding could be used such as black for general waste, green for glass, blue for paper and red for plastics. Solid rear axle with two Ø200mm wheels and three robust handles allow the bins to be moved easily even when full.

Model No:		Colour:
A	BM100	Black
B	BM100B	Blue
C	BM100G	Green
D	BM100R	Red
Capacity:		100L
Dimensions (W x D x H):		595 x 570 x 765mm

D

100L

A



B



C



E



E - H 100L Refuse/Wheelie Bins with Foot Pedal  
Model No. SEE BELOW

Durable refuse/wheelie bins made from polypropylene with quick release foot pedal. Bins are available in four different colours allowing you to set up your own colour-coding system. Alternatively, common colour-coding could be used such as black for general waste, green for glass, blue for paper and red for plastics. Solid rear axle with two Ø200mm wheels and three robust handles allow the bins to be moved easily even when full.

Model No:		Colour:
E	BM100P	Black
F	BM100PB	Blue
G	BM100PG	Green
H	BM100PR	Red

Capacity:	100L
Dimensions (W x D x H):	595 x 570 x 765mm

F



G



H



100L

E - H





**Heavy-Duty Modular Multifunction Floor Cabinets**

To see the full range of modular storage units, see pages 1008 to 1029.

**A**

45L



**A 45L Plastic Pedal Bin**  
**Model No. BM60**

Manufactured from heavy-duty polypropylene. Square design allows unit to sit flush against almost any wall, ideal for where space is limited. Fitted with plastic foot pedal for hands-free operation and carry handle.

<b>Capacity:</b>	45L
<b>Dimensions (W x D x H):</b>	400 x 390 x 600mm

**B**



**B Wall Mounting Cigarette Bin**  
**Model No. RCB01**

2-Piece design for easy installation, emptying and cleaning. Metal construction with Zintec® liner. Fitted with high quality lock and supplied with two keys. Includes fittings for wall mounting. Suitable for use in building entrances and smoking areas.

<b>Size (W x D x H):</b>	260 x 80 x 320mm
--------------------------	------------------

**C**



**C Stainless Steel Wall Mounting Cigarette Bin**  
**Model No. RCB02**

2-Piece design for easy installation, emptying and cleaning. Stainless steel construction with Zintec® liner. Fitted with high quality lock and supplied with two keys. Includes fittings for wall mounting. Suitable for use in building entrances and smoking areas.

<b>Size (W x D x H):</b>	260 x 80 x 320mm
--------------------------	------------------

**D**



**D Cigarette Floor Ashtray**  
**Model No. RCB04**

Manufactured from 1mm mild steel and finished for resistance to corrosion. Twin openings in concave cover for safe and hygienic use. Suitable for use in building entrances and smoking areas.

<b>Size (W x D x H):</b>	335 x 230 x 112mm
--------------------------	-------------------

**E**



**E Cigarette Bin**  
**Model No. RCB07**

Metal construction cigarette bin with black powder coated body. Easy installation, emptying and cleaning. Fitted with high quality lock and supplied with two keys. Suitable for use in building entrances and smoking areas.

<b>Size (W x D x H):</b>	240 x 240 x 880mm
--------------------------	-------------------



**F**




**F 8L Cigarette Ashtray & Litter Bin**  
**Model No. RCB06**

Metal construction with black powder coated body with side opening and aluminium lid featuring built-in ashtray. Supplied with removable metal inner liner and carry handle making emptying quick and easy. Ideal for use in building entrances and smoking areas.

<b>Size (W x D x H):</b>	270 x 270 x 590mm
--------------------------	-------------------




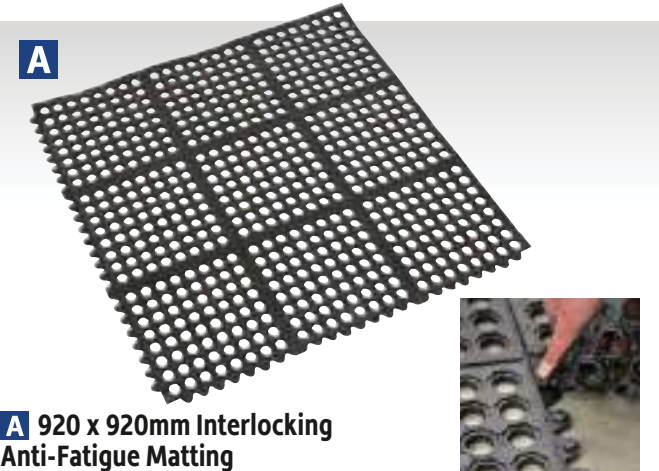

**A** 920 x 920mm Interlocking Anti-Fatigue Matting  
Model No. MIC9292

Hard-wearing rubber anti-slip mat provides fatigue relief and insulation from cold concrete floors. Features four interlocking edges to provide desired area coverage.

Size:	920 x 920mm
Thickness:	12mm

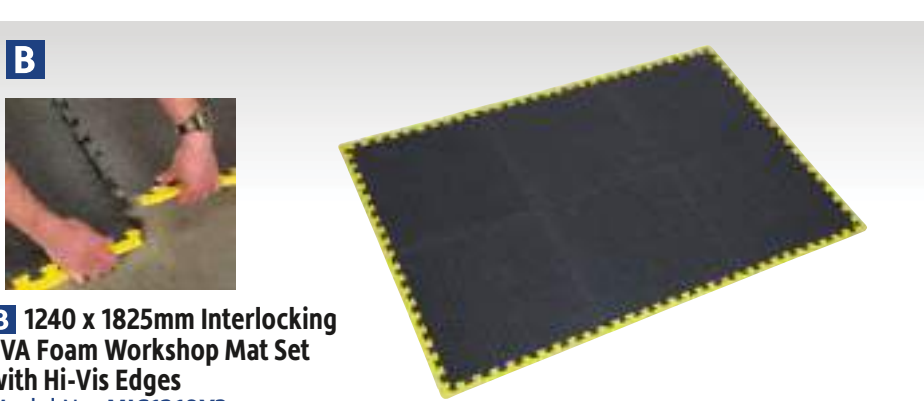

**B** 1240 x 1825mm Interlocking EVA Foam Workshop Mat Set with Hi-Vis Edges  
Model No. MIC1218Y3

Hard-wearing anti-slip EVA foam matting suitable for use in the workshop and machine room. Provides fatigue relief and insulation from cold concrete floors. All tiles can be interlocked to make one bordered area, alternatively can be laid out as three separate bordered areas of two tiles each. The hi-vis border improves visibility, enhancing safety.

Contents:	Tiles (x6), 18 High-Vis Edges
Overall Dimensions (6 tile):	1240 x 1825mm
Overall Dimensions (2 tile):	650 x 1240mm
Thickness:	10mm



**C** 910 x 1980mm Anti-Fatigue Workshop Matting  
Model No. MCR0919

Hard-wearing lightweight cushioned anti-fatigue matting. Provides insulation from cold concrete floors. Slip resistant patterned surface. Suitable for use in workshops, garages, kitchens, bars and gyms.

Size:	910 x 1980mm
Thickness:	8mm



**D** 1200 x 1800mm Interlocking EVA Foam Workshop Mat Set  
Model No. MIC1218

Hard-wearing anti-slip EVA foam matting suitable for use in the workshop and machine room. Provides fatigue relief and insulation from cold concrete floors. Interlocks to make any length in units of 600mm. End section edges to prevent damage.

Contents:	600 x 600mm Tiles (x6) 18 Edges
Thickness:	11mm



**E** 450 x 750mm Rubber Disinfection Mat With Removable Polyester Carpet  
Model No. DRM01

Rubber mat with slip resistant base. Removable polyester carpet fits in the mats ingress, can be easily cleaned or replaced. Mat capacity holds up to 1L of disinfectant. Suitable for indoor and outdoor use. Can be used before entrances of kitchens, farms, labs of agro-food manufacturing, poultry houses, hospitals, airports, schools, offices and any other areas requiring foot disinfection.

Size (W x L x D):	450 x 750 x 18mm
Disinfectant Capacity:	1L



**F - G** Ribbed Workshop Matting  
Model No. SEE BELOW

Hard-wearing natural rubber with a slip resistant fluted surface. Provides insulation from cold concrete floors. Can be used on workbenches to help prevent damage to fragile parts and worktop.


Model No:	Size:	Thickness:
<b>F</b> MCR1025	1000 x 2500mm	3mm
<b>G</b> MCR10100	1000 x 10000mm	3mm



**H** 1500 x 900mm Anti-Fatigue Workshop Matting  
Model No. MRM0915

Hard-wearing rubber provides fatigue relief and insulation from cold concrete floors. Raised circular surface design for superior slip resistance. Moulded bevelled edge to reduce risk of tripping.

Size (L x W):	1500 x 900mm
Thickness:	14mm

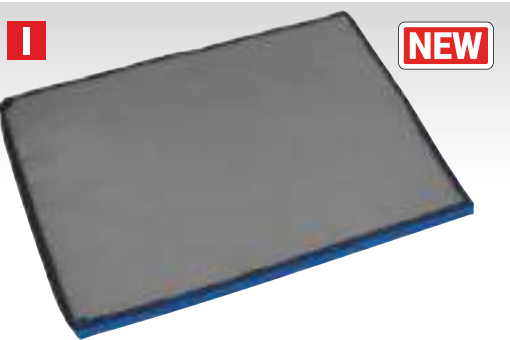

**I** Disinfection Mats  
Model No. SEE BELOW

Mats have a slip resistant base. Removable foam, easy to clean and rot resistant. Suitable for indoor and outdoor use. Can be used before entrances of areas requiring foot disinfection.

Model No:	Size (W x L x D):	Disinfectant Capacity:
<b>DIMS</b>	450 x 600 x 20mm	0.8L
<b>DIML</b>	900 x 1000 x 20mm	2.7L

A - E Submersible Water Pumps  
Model No. SEE BELOW

Manufactured from corrosion resistant materials with stainless steel motor case and Noryl® base cover. Available with or without automatic cut-out. Minimum water depth of just 20mm. Designed for clean water although these pumps will accept small particles up to 5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water.

LOW VOLTAGE  
SUBMERSIBLE  
TRANSFER PUMPS

For full details,  
see page 659.



A



230V

B - E



Auto  
Cut-Out

230V

A

B

C

D

E

Model No:	WPC100	WPC100A	WPC150A	WPC235A	WPC250A
Cut-Out:	Manual	Automatic	Automatic	Automatic	Automatic
Outlet OD:	Ø32mm	Ø32mm	Ø32mm	Ø38mm	Ø38mm
Maximum Output/Min:	100L(22gal)	100L(22gal)	167L(36gal)	208L(45gal)	250L(55gal)
Maximum Head:	6m	6m	8m	8.5m	9.5m
Maximum Water Depth:	5m	5m	7m	7m	5m
Minimum Water Depth:	20mm	20mm	20mm	20mm	20mm
Maximum Particle Size:	5mm	5mm	5mm	5mm	5mm
Motor Power:	250W	250W	500W	750W	900W
Supply:	230V	230V	230V	230V	230V

F - G



For Dirty  
Water

Auto  
Cut-Out

230V

H



STAINLESS  
STEEL

For Dirty  
Water

Auto  
Cut-Out

230V

I



STAINLESS  
STEEL

Auto  
Cut-Out

230V

F - G Automatic Submersible  
Dirty Water Pumps  
Model No. SEE TABLE

Manufactured from corrosion resistant materials with stainless steel motor case and Noryl® base cover. Fitted with automatic cut-out. Minimum water depth of 40mm. Designed for operation in dense and dirty water. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.

H 225L/min Automatic Stainless  
Submersible Dirty Water Pump  
Model No. WPS225A

Manufactured from corrosion resistant materials with stainless steel body and motor case. Fitted with automatic cut-out. Minimum water depth of 30mm. Designed for operation in dense and dirty water. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.

I 250L/min Automatic Stainless  
Submersible Clean Water Pump  
Model No. WPS250A

Manufactured from corrosion resistant materials with stainless steel body and motor case. Fitted with automatic cut-out. Minimum water depth of 30mm. Designed for clean water although this pump will accept small particles up to 5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water.



KEEP SAFE!

Always use an RCD device.  
See page 1128 for details.



F

G

H

I

Model No:	WPD133A	WPD235A	WPS225A	WPS250A
Cut-Out:	Automatic	Automatic	Automatic	Automatic
Outlet OD:	Ø32mm	Ø38mm	Ø38mm	Ø38mm
Maximum Output/Min:	133L(30gal)	217L(47gal)	225L(49gal)	250L(54gal)
Maximum Head:	5m	8m	7.5m	8m
Maximum Water Depth:	7m	7m	5m	7m
Minimum Water Depth:	40mm	40mm	30mm	30mm
Maximum Particle Size:	30mm	35mm	15mm	5mm
Motor Power:	400W	750W	750W	600W
Supply:	230V	230V	230V	230V





**A - C** Automatic Submersible Clean Water Pumps  
Model No. [SEE BELOW](#)

Manufactured from heavy-duty corrosion resistant materials with stainless steel motor case and polypropylene base cover. Fitted with an automatic cut-out, which can be set at multiple heights using an innovative cable fixed mounting bracket. Minimum water depth of just 5mm. Designed for clean water although these pumps will accept small particles up to 5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water.



**D** 225L/min Automatic Submersible Dirty Water Pump  
Model No. [WPD235P](#)

Manufactured from heavy-duty corrosion resistant materials with stainless steel motor case and polypropylene base cover. Fitted with an automatic cut-out, which can be set at multiple heights using an innovative cable fixed mounting bracket. Minimum water depth of 45mm. Designed for operation in dense and dirty water with a maximum particle size of 35mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.



**E** 225L/min Automatic Stainless Submersible Dirty Water Pump  
Model No. [WPS225P](#)

Manufactured from corrosion resistant materials with polypropylene base cover, stainless steel body and motor case. Fitted with adjustable automatic cut-out. Minimum water depth of 45mm. Designed for operation in dense and dirty water with a maximum particle size of 35mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.



**F** 417L/min High Flow Automatic Submersible Dirty Water Pump  
Model No. [WPD415](#)

Manufactured from heavy-duty corrosion resistant materials with stainless steel motor case and polypropylene base cover. Capable of operating in dense and dirty water with a maximum particle size of 40mm. High flow rate up to 25000L/hr(417L/min). Fitted with an automatic cut-out, which can be set at multiple heights using an innovative cable fixed mounting bracket. Minimum water depth of 53mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.



**G** 217L/min Automatic Submersible Clean & Dirty Water Pump  
Model No. [WPCD215](#)

Manufactured from corrosion resistant materials with a polypropylene base cover. Features foldaway feet which convert the pump's usage between clean and dirty water. The pump operates in dirty water up to a particle size of 30mm with the feet extended out. With the feet folded away, the pump operates in clean water up to a particle size of 5mm. Fitted with adjustable automatic cut-out. Minimum water depth of just 5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water and dense liquids.

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>
<b>Model No:</b>	<b>WPC100P</b>	<b>WPC150P</b>	<b>WPC235P</b>	<b>WPD235P</b>	<b>WPS225P</b>	<b>WPD415</b>	<b>WPCD215</b>
<b>Cut-Out:</b>	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Outlet OD:</b>	Ø32mm	Ø32mm	Ø38mm	Ø38mm	Ø38mm	Ø51mm	Ø38mm
<b>Maximum Output/Min:</b>	100L(22gal)	183L(40gal)	217L(48gal)	225L(50gal)	225L(50gal)	417L(92gal)	217L(48gal)
<b>Maximum Output/hr:</b>	6000L(1320gal)	11000L(2420gal)	13000L(2860gal)	13500L(2970gal)	13500L(2970gal)	25000L(5500gal)	13000L(2860gal)
<b>Maximum Head:</b>	6m	8.5m	8.5m	8m	8m	11m	8m
<b>Maximum Water Depth:</b>	7m	7m	7m	7m	7m	7m	7m
<b>Minimum Water Depth:</b>	5mm	5mm	5mm	45mm	45mm	53mm	5mm
<b>Maximum Particle Size:</b>	5mm	5mm	5mm	35mm	35mm	40mm	5/30mm
<b>Motor Power:</b>	250W	550W	750W	750W	750W	1300W	750W
<b>Supply:</b>	230V	230V	230V	230V	230V	230V	230V

A



Auto Cut-Out

Low Level

230V

Minimum Water Depth 2mm

**A 117L/min Automatic Low Level 2mm Submersible Water Pump**  
**Model No. WPL117A**

Manufactured from corrosion resistant materials with stainless steel motor case and Noryl® base cover. Fitted with automatic cut-out. Puddle pump with minimum water depth of just 2mm makes this ideal for flood recovery. Designed for clean water although this pump will accept small particles up to 5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water.

Cut-Out:	Automatic
Outlet:	Ø32mm
Maximum Output/Min:	117L(26gal)
Maximum Head:	8m
Minimum Water Depth:	2mm
Maximum Water Depth:	7m
Maximum Particle Size:	5mm
Motor Power:	400W
Supply:	230V

D



10m

**D 10m Layflat Water Hoses**  
**Model No. SEE BELOW**

High quality PVC hoses reinforced with synthetic fibres. Suitable for water discharge only.

Model No:	Length:	Hose Diameter:
LFH1025	10m	Ø25mm
LFH1032	10m	Ø32mm
LFH1038	10m	Ø38mm
LFH1050	10m	Ø50mm

B



4000L/hr

Auto Cut-Out

230V

**B 67L/min Submersible Water Butt Pump**  
**Model No. WPB50A**

Manufactured from heavy-duty corrosion resistant materials with a stainless steel motor case and polypropylene base cover. Fitted with automatic cut-out float valve which can be set at different heights. Ideal for pumping water straight from a water butt directly onto your garden. Supplied with a flexible hose and height adjustable swan neck bracket, adjustable flow control feature and snap-on connector.

Cut-Out:	Automatic
Outlet:	Ø19mm
Maximum Output/Min:	67L(14.75gal)
Maximum Head:	11m
Minimum Water Depth:	28mm
Maximum Water Depth:	7m
Maximum Particle Size:	0.5mm
Motor Power:	400W
Supply:	230V

E



Auto Cut-Out

40m Head

230V

STAINLESS STEEL

C



5580L/hr

55m Head

230V

9 STAGE PUMP

STAINLESS STEEL

HIGH FLOW

**C 9-Stage 55m Head Borehole/Deep Well Pump**  
**Model No. WPW935S**

Manufactured from high impact stainless steel for added durability and corrosion resistance. Ideal for installing in traditional wells, clean water deposits, boreholes and garden irrigation systems. 9-Stage pump enables high flow rates, high heads and ensures a stable performance.

Cut-Out:	Manual
Outlet:	Ø38mm
Maximum Output/Min:	93L(20gal)
Maximum Head:	55m
Number of Stages:	9
Motor Power:	1000W
Supply:	230V
Cable Length:	22m



E



Auto Cut-Out

40m Head

230V

STAINLESS STEEL

**E 92L/min 40m Head Automatic Submersible Stainless Water Pump**  
**Model No. WPS92A**

Manufactured from corrosion resistant materials with stainless steel body and motor case. Maximum head of 40m makes this unit ideal for wells. Fitted with automatic cut-out. Minimum water depth of 32mm. Designed for clean water although these pumps will accept small particles up to 0.5mm. Suitable for the effective drainage of cellars, sinks, cisterns, baths and the general transfer of water.

Cut-Out:	Automatic
Outlet:	Ø32mm
Maximum Output/Min:	92L(20gal)
Maximum Head:	40m
Minimum Water Depth:	32mm
Maximum Water Depth:	7m
Maximum Particle Size:	0.5mm
Motor Power:	1000W
Supply:	230V





**A** Ø50mm Water Pump 7hp Petrol  
Model No. **EWPO50**

Economically designed petrol powered water pump with recoil starting. Suitable for on site applications where mains power supply is not available. Featuring Ø50mm inlet/outlet with 28m pumping head, offering a high flow rate up to 600L/min of water. Fitted onto frame with high density rubber shock absorbers, frame also aids with protection from accidental damage.

Motor Power:	7hp
Motor Type:	4-Stroke/Unleaded
Inlet Diameter:	Ø50mm
Outlet Diameter:	Ø50mm
Maximum Output/Min:	600L
Maximum Head:	28m
Maximum Suction Head:	8m
Maximum Tank Capacity:	3.6L
Noise Rating LwA:	99dB(A)
Dry Weight:	27kg
Dimensions:	477 x 385 x 420mm



**F** Ø50mm x 5m Solid Wall Suction  
Hose for EWP050  
Model No. **EWPO50SW**

Solid wall hose for use on suction side of water pumps. For use with Model No. EWP050.

Length:	5m
Size ID/OD:	Ø50/60mm



**B - C** Surface Mounting  
Water Pumps  
Model No. **SEE RIGHT**

Manufactured from heavy-duty corrosion resistant materials in either stainless steel or polypropylene. Suction pump suitable for drawing brackish water up to 8m. Includes a removable filter for easier maintenance.

Model No:	<b>WPS060</b>	<b>WPS062S</b>
Cut-Out:	Manual	Manual
Outlet:	1" BSP	1" BSP
Maximum Output/Min:	50L (11 gal)	55L (12 gal)
Maximum Head:	35m	38m
Maximum Suction Height:	8m	8m
Maximum Particle Size:	1mm	1mm
Motor Power:	650W	800W
Supply:	230V	230V



**D - E** Surface Mounting  
Booster Pumps  
Model No. **SEE RIGHT**

Manufactured from high impact thermoplastic material or stainless steel for added durability. Ideal for boosting or maintaining water pressure within the home or garden water supplies. Fitted with automatic pressure cut-off valve. Suitable for lifting water up to 8m.

Model No:	<b>WPB050</b>	<b>WPB062S</b>
Cut-Out:	Automatic	Automatic
Outlet:	1" BSP	1" BSP
Maximum Output/Min:	50L (11 gal)	55L (12 gal)
Maximum Head:	35m	38m
Maximum Suction Height:	8m	8m
Maximum Particle Size:	1mm	1mm
Motor Power:	600W	800W
Supply:	230V	230V



**G** Solid Wall Suction Hoses  
Model No. **SEE BELOW**

Solid wall hoses for use on suction side of water pumps. Suitable for use with Model No's WPS060, WPS062S, WPB050 and WPB062S.

Model No:	Length:	Size (ID/OD):
<b>WPS060HS</b>	4m	Ø25/30mm
<b>WPS060HL</b>	7m	Ø25/30mm



**H - I** Inlet Filters for Surface Mounting Pumps  
Model No. **SEE BELOW**

High quality filters with a composite case. Includes a screw top lid to reveal the easy clean filter element. Ideal for fitting to Sealey and other brands of surface mounting pumps. Includes two female to male adaptors.

Model No:	Capacity:	Applications:
<b>H WPF1</b>	1L	WPB050, WPS060
<b>I WPF2</b>	2L	WPB050, WPS060, WPS062S, WPB062S

A - C Submersible Pond Pumps  
Model No. SEE BELOW

Suitable for creating garden water features. They also provide the important functions of filtration and water circulation which are necessary to maintain healthy plant and fish life. Model No. WPP1100 supplied with two fountain heads. Model No's WPP2300 and WPP3500 supplied with full set of five fountain heads.

D - F Stainless Steel Submersible Pond Pumps  
Model No. SEE BELOW

Manufactured from stainless steel for added durability and corrosion resistance. Suitable for creating garden water features. They also provide the important functions of filtration and water circulation which are necessary to maintain healthy plant and fish life.



G RCD Safety Adaptor 230V  
Model No. RCD981

Cuts power automatically to protect against electrocution. Suitable for all types of indoor and outdoor electrical appliances. Easy-to-use, 2-button operation. No wiring needed - plugs straight into 13A socket. No need to remove from socket to reset unit.

Supply:	230V
Maximum Load:	3120W
Maximum Operating Current:	13A
Trip Speed:	30ms
Trip Current:	30mA

Fountain Head Effects



The image displays three models of water pumps, labeled A, B, and C, arranged horizontally. Each pump has a blue cylindrical body and a black top section with a vertical pipe and a circular head. Pump A is the smallest, B is medium-sized, and C is the largest. Below the pumps is a table comparing their specifications. The table has four columns: the first column lists the specifications, and the next three columns correspond to models A, B, and C. The specifications include Model No., Fountain Head Effects, Outlet Size OD, Maximum Output, Maximum Head, Motor Power, Supply, and Cable Length. The output values are given in both liters per hour (L/hr) and gallons per hour (gal/hr).

<b>A</b>	<b>B</b>	<b>C</b>	
1100L/hr	2300L/hr	3500L/hr	
230V	230V	230V	
<b>A</b>	<b>B</b>	<b>C</b>	
Model No:	WPP1100	WPP2300	WPP3500
Fountain Head Effects:	A, B	A, B, C, D, E	A, B, C, D, E
Outlet Size OD:	Ø13mm	Ø19mm	Ø19mm
Maximum Output:	1100L(242gal)/hr	2300L(506gal)/hr	3500L(770gal)/hr
Maximum Head:	1.1m	2.3m	3m
Motor Power:	20W	55W	95W
Supply:	230V	230V	230V
Cable Length:	10m	10m	10m

The image displays three identical vertical stainless steel water pumps, labeled D, E, and F. Each pump features a stainless steel body, a blue handle, and a black base. They are shown against a white background. The pumps are labeled D, E, and F, corresponding to the table below.

<b>D</b>	<b>E</b>	<b>F</b>	
STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	
1750L/hr	3000L/hr	3600L/hr	
230V	230V	230V	
<b>D</b>	<b>E</b>	<b>F</b>	
Model No:	WPP1750S	WPP3000S	WPP3600S
Fountain Head Effects:	A(x2), B, C	A, B, C	A, B, C
Outlet Size OD:	Ø13mm	Ø13mm	Ø13mm
Maximum Output:	1750L(360gal)/hr	3000L(600gal)/hr	3600L(780gal)/hr
Maximum Head:	2.3m	3.2m	4m
Motor Power:	50W	85W	120W
Supply:	230V	230V	230V
Cable Length:	10m	10m	10m



**A 14L Dust Suppression Water Tank**  
**Model No. DST14**

Worksafe® dust suppression tank with 14L working capacity. Effective at suppressing dust while using cut off saws, bench saws and floor saws in all working environments. Automatic pressure release valve stops pressure building higher than 3bar for optimum use. Before use 20 full pumps will allow for 1-1½ minutes of operation. Includes attached strap for easy transportation, a 3m hose with quick release coupling and a spare set of washers.



**SV20  
SERIES**

**One Battery Platform**

For full details, see pages 828 to 840.



**B - C Heavy-Duty Flexi-Tubs**  
**Model No. SEE BELOW**

Manufactured from heavy-duty polyethylene with a versatile, flexible construction. Fitted with strong carry-handles tested to a breaking strain of 350kg. Ideal for a wide range of domestic and industrial applications.

<b>Model No:</b>	<b>SFT40B</b>	<b>SFT40Y</b>
<b>Colour:</b>	Black	Yellow
<b>Maximum Capacity:</b>	40L	40L
<b>Dimensions (W x D x H):</b>	520 x 450 x 345mm	520 x 450 x 345mm
<b>Base Size:</b>	Ø340mm	Ø340mm



**D 65L Galvanized Wheelbarrow**  
**Model No. WB65**

Lightweight galvanized steel wheelbarrow ideal for a wide range of gardening and light construction applications, as well as general domestic use. Constructed with strong tubular steel frame and rubber gripped handles. Fitted with Ø340mm pneumatic tyre.

<b>Capacity:</b>	65L
------------------	-----



**E 85L Wheelbarrow**  
**Model No. WB85**

Manufactured from heavy-duty composite material. Ideal for a wide range of gardening and light construction tasks as well as general domestic use. Constructed with strong tubular steel frame and rubber grip handles. Fitted with Ø405mm pneumatic tyre.

<b>Capacity:</b>	85L
------------------	-----



**A** 27kg Lightweight Walk Behind Broadcast Spreader  
Model No. SPB27W

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Fitted with nylon gear and adjustable feed system. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	27kg
Capacity (Volume):	16L
Spread:	3-3.6m
Weight:	5.5kg
Dimensions (W x D x H):	460 x 810 x 765mm



**B** 37kg Walk Behind Broadcast Spreader  
Model No. SPB37W

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Fitted with nylon gear, rain cover, pneumatic tyres and adjustable feed system. Includes hopper screen to ease spreader flow and filter out unwanted contaminants. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	37kg
Capacity (Volume):	29L
Spread:	3-3.6m
Weight:	10.4kg
Dimensions (W x D x H):	535 x 940 x 820mm



**C** 57kg Walk Behind Broadcast Spreader  
Model No. SPB57W

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Fitted with aluminium gear, rain cover, pneumatic tyres and adjustable feed system. Includes hopper screen to ease spreader flow and filter out unwanted contaminants. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	57kg
Capacity (Volume):	60L
Spread:	3-3.6m
Weight:	17.6kg
Dimensions (W x D x H):	790 x 1060 x 890mm



**D** 37kg Walk Behind Stainless Steel Broadcast Salt Spreader  
Model No. SSB37W

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Features corrosion resistant, stainless steel feed system ideal for spreading salt and grit. Fitted with nylon gear and adjustable feed system. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	37kg
Capacity (Volume):	29L
Spread:	3-3.6m
Weight:	10.44kg
Dimensions (W x D x H):	550 x 940 x 860mm



**E - F** Tow Behind Broadcast Spreaders  
Model No. SEE BELOW

Manufactured with a strong tubular steel frame and polypropylene dispensing hoppers. Pin hitch design attaches to ride-on lawnmowers, can be converted to ball hitch using Model No. TB36\*. Fitted with aluminium gear, rain cover, pneumatic tyres and adjustable feed system. Includes hopper screen to ease spreader flow and filter out unwanted contaminants. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

	<b>E</b>	<b>F</b>
Model No:	SPB57T	SPB80T
Capacity (Weight):	57kg	80kg
Capacity (Volume):	60L	88L
Spread:	3-3.6m	3-3.6m
Weight:	11.6kg	24kg
Dimensions (W x D x H):	680 x 980 x 790mm	880 x 1350 x 965mm

\*Some modification may be required



A





**1070mm Spread**

**80L Capacity**

**80kg Capacity**

**A 80kg Tow Behind Drop Spreader**  
Model No. **SPD80T**

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Pin hitch design attaches to ride-on lawnmowers, can be converted to ball hitch using Model No. TB36\*. Fitted with pneumatic tyres and adjustable feed system. Designed to spread in a continuous line providing a more accurate application. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	80kg
Capacity (Volume):	80L
Spread:	1070mm
Weight:	19kg
Dimensions (W x D x H):	1350 x 910 x 550mm

\* Some modification may be required

B



**25L Capacity**

**27kg Capacity**

**560mm Spread**

**B 27kg Walk Behind Drop Spreader**  
Model No. **SPD27W**

Manufactured with a strong tubular steel frame and polyethylene dispensing hopper. Fitted with adjustable feed system to control feed quantities. Designed to spread in a continuous line providing a more accurate application. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.


Capacity (Weight):	27kg
Capacity (Volume):	25L
Spread:	560mm
Weight:	5kg
Dimensions (W x D x H):	740 x 810 x 775mm

C

**Single Nozzle Broadcast Lance**  
Model No. **SSA2**

Single broadcast lance provides a wide 4.3m spray pattern. Suitable for use with Model No. SS37. Supplied with polyvinyl hose and wall mounting equipment. Also suitable as replacement broadcast nozzle for Model No's SS60 and SS98.

Maximum Spray Reach:	4.3m
Applications:	SS37, SS60, SS98

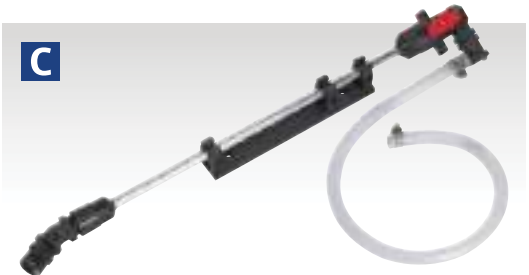

D



**37L**

**12V**

**D 37L 12V Spot Sprayer**  
Model No. **SS37**

Spot sprayer suitable for attaching to most all-terrain vehicles. Powered by 12V battery or connected via 12V supply on ATV/Quad Bikes. Supplied with trigger operated lance providing controlled application. Features remote operated on/off switch and battery clips. Tank is manufactured using chemical resistant material and is fitted with drainage spout. Tank also features extra-thick walls and is UV-stabilized to prevent fading. Suitable for use with a variety of different agents including weed killer, de-icer and for spraying fertilizer.

Tank Capacity:	37L
Maximum Flow Rate:	3.8L/min
Maximum Pressure:	40psi
Maximum Spray Reach:	4.3m
Hose Length:	4.5m
Dimensions (W x D x H):	711 x 305 x 279mm
Weight:	4.1kg

E



**60L**

**12V**

**98L**

**12V**

**E - F 12V Spot/Broadcast Sprayers**  
Model No. **SEE BELOW**

Spot/broadcast sprayers supplied with tie down straps to attach to most all-terrain vehicles. Powered by 12V battery or connected via 12V supply on vehicle. Quiet running diaphragm pump is pressure activated, producing a smooth flow from the tank. Supplied with trigger operated lance providing controlled application and broadcast lance for hands-free operation. Features remote operated on/off switch and battery clips. Tank is manufactured using chemical resistant material and is fitted with drainage spout. Tank also features extra-thick walls and is UV-stabilized to prevent fading. Suitable for use with a variety of different agents including weed killer, de-icer and for spraying fertilizer.

	E	F
Model No:	SS60	SS98
Tank Capacity:	60L	98L
Maximum Flow Rate:	8.3L/min	8.3L/min
Maximum Pressure:	70psi	70psi
Maximum Spray Reach:	4.3m	4.3m
Hose Length:	4.5m	4.5m
Dimensions (W x D x H):	864 x 368 x 419mm	864 x 368 x 622mm
Weight:	8.4kg	9.9kg



**A** 1.5L Hand Pressure Sprayer  
Model No. SS1

Ideal for spraying a wide variety of fluids including water, herbicides, pesticides, insecticides, fungicides and solvent-free preservative treatments. Features ergonomic handle and pressure relief valve. Fitted with adjustable nozzle to switch between mist and jet settings.

Capacity:	1.5L
-----------	------



**B - C** Pressure Sprayers  
Model No. SEE BELOW

Ideal for spraying a wide variety of fluids including water, herbicides, pesticides, insecticides, fungicides and solvent-free preservative treatments. Metal lance with adjustable nozzle which can be switched between mist and jet settings. Fitted with adjustable shoulder strap and pressure relief valve.

	B	C
Model No:	SS2	SS3
Capacity:	5L	8L



**D** 16L Backpack Sprayer  
Model No. SS4

Designed for extensive use around the garden, greenhouse and vegetable plots. Suitable for use with most garden chemicals including pesticides, herbicides and solvent-free preservatives. Manufactured from heavy-duty polypropylene. Supplied with four interchangeable spray nozzles and lockable trigger designed for extended use. Features double padded shoulder straps and large filler cap with integral filter. Can be used left or right handed by simply reversing the shoulder straps.

Capacity:	16L
-----------	-----



**E - F** Grit & Salt Storage Boxes  
Model No. SEE BELOW

Manufactured from hard-wearing polyethylene. Ideal for indoor and outdoor storage of grit, sand and salt. Angled lid forces water to run off, keeping contents dry. Features large opening for easy-access. Compatible with most pallet trucks.

	E	F
Model No:	GB02	GB03
Capacity:	130L	200L
Dimensions (W x D x H):	850 x 500 x 750mm	1005 x 590 x 855mm
Weight:	12kg	16kg



**G** 110L Grit & Salt Storage Box  
Model No. GB01

Manufactured from hard-wearing polyethylene. Ideal for indoor and outdoor storage of grit, sand and salt. Angled lid forces water to run off, keeping contents dry. Features large opening for easy-access.

Capacity:	110L
Dimensions (W x D x H):	650 x 500 x 570mm
Weight:	8kg



**H** 75L Grit/Salt Mobile Storage Cart  
Model No. GB04

Manufactured from hard-wearing chemical and weather resistant polyethylene. Features a 75L capacity storage tank ideal for a variety of materials including grit, salt, sand, logs and oil absorbents. Fitted with composite wheels and ergonomic handle for easy manoeuvrability. Large clip securely holds lid open to provide easy-access. Angled lid forces water to run off, keeping contents dry.

Capacity:	75L
Dimensions (W x D x H):	435 x 590 x 1070mm
Weight:	11kg





**A** Shovel with 710mm Wooden Handle  
Model No. SH710

Tough, pressed carbon steel shovel head tempered for extra strength. Fitted with hardwood ash handle. Manufactured to BS 3388.

Length:	1020mm
Handle:	710mm
Blade:	260 x 340mm



**B - C** General Purpose Shovels with 900mm Handles  
Model No. SEE BELOW

Heavy-duty spark-free shovels with choice of shaft and YD handle. Large 365 x 470mm composite head ideal for use with snow, wood chips, compost, grain and debris.

	<b>B</b>	<b>C</b>
Model No:	SS01	SS02
Length:	1370mm	1370mm
Handle:	900mm	900mm
Shaft Type:	Metal	Hardwood
Head Dimensions:	365 x 470mm	365 x 470mm



**D - E** Snow Shovels  
Model No. SEE BELOW

Lightweight and durable shovels with forged metal shaft and YD handle. Ideal for use in adverse weather conditions.

	<b>D</b>	<b>E</b>
Model No:	SS05	SS06
Length:	1360mm	1440mm
Head Dimensions:	395 x 310mm	545 x 380mm



**F** 590mm Folding Shovel  
Model No. SS03

Manufactured with a strong nylon handle and solid carbon steel head, powder coated for resistance to corrosion. Ideal for use in adverse weather conditions. Lightweight and durable design featuring twist-and-tighten locking system for easy assembly. Supplied in pouch for easy storage.

Length (Folded):	240mm
Length (Unfolded):	590mm
Head Dimensions:	155 x 220mm



**G** 800mm Vehicle Traction Track  
Model No. VTR02

Heavy-duty vehicle traction track designed to prevent wheels spinning on snow, sand and mud. Flexible PVC design allows track to sit smooth against uneven surfaces. Fitted with galvanized steel cable and deep ribbed slatted cleats providing maximum grip. Each track can support a maximum safe working load of 3.5tonne. Supplied as singles in canvas storage pouch.

Length:	800mm
Width:	220mm
Safe Working Load:	3.5tonne



**H** 80kg Tow Behind Broadcast Spreader  
Model No. SPB80T

Manufactured with a strong tubular steel frame and polypropylene dispensing hopper. Pin hitch design attaches to ride-on lawnmowers, can be converted to ball hitch using Model No. TB36\*. Fitted with aluminium gear, rain cover, pneumatic tyres and adjustable feed system. Includes hopper screen to ease spreader flow and filter out unwanted contaminants. Sprays in 360° motion to cover a large area. Suitable for a variety of horticultural agents including grit, seed, salt, fertilizer and weed killer.

Capacity (Weight):	80kg
Capacity (Volume):	88L
Spread:	3-3.6m
Weight:	24kg
Dimensions (W x D x H):	880 x 1350 x 965mm

\*Some modification may be required

**A Horizontal Foot Operated Log Splitter****Model No. LS450H**

Heavy-duty steel construction with adjustable foot pedal, splits firewood easily with each step on the foot pedal exerting a splitting force of up to 1.2tonne. Minor assembly required. Folds down for easy storage.

<b>Maximum Log Diameter:</b>	Ø250mm
<b>Maximum Log Length:</b>	450mm
<b>Maximum Load Pressure:</b>	1.2tonne
<b>Overall Size (W x D x H):</b>	370 x 835 x 520mm
<b>Weight:</b>	9.5kg

**A**

1.2tonne

**B**

230V

**B 85W Chainsaw Blade Sharpener****Quick Locating****Model No. SMS2002C**

Quick, easy and safe way to sharpen a chainsaw blade. Fitted with a  $\pm 35^\circ$  tilting vice. Will bring life back to blade, enabling safer cutting and limiting snagging.

<b>Motor Power:</b>	85W - 230V
<b>Free Speed:</b>	4800rpm
<b>Wheel Diameter:</b>	Ø100mm
<b>Angle Adjustment:</b>	$\pm 35^\circ$
<b>Chain Sizes:</b>	375 Pitch 'S' BL, 404 Pitch 'S', 3/8 LP 'C' STD, NK, BL, 325 Pitch 'C'
<b>Replacement Blade:</b>	SMS2002C.B
<b>Weight:</b>	2.5kg

**B****A****C****HEAVY DUTY****C Heavy-Duty Log Stand Ø230mm Capacity****Model No. LC300ST**

Easy to assemble and safe to use. Folds down flat for storage and transportation. Holds logs up to Ø230mm. Compatible with chainsaw use for ease and safety.

<b>Overall Size Open (W x D x H):</b>	440 x 480 x 930mm
<b>Overall Size Folded (W x D x H):</b>	440 x 90 x 690mm
<b>Maximum Log Diameter:</b>	Ø230mm
<b>Weight:</b>	10.3kg

**D****NEW**

Ø100mm

**D Ø100mm 2-Stroke Petrol Post Driver****Model No. PPD100**

Petrol powered post driver designed for use with fence posts up to Ø100mm. 52cc Single cylinder engine with a fuel capacity of 1.3L. Includes additional sleeves for adjusting post sizes to Ø69mm and Ø49mm diameter. Engine is turned on via pull-start cord. Accessories include a mixing oil bottle, a small tub of grease and a small tool kit to make adjustments.

<b>Weight:</b>	30.1kg
----------------	--------





**A 4tonne Log Splitter**  
370mm Capacity  
Model No. **LS370H**

Safe and easy way to split logs, offering continuous sizing and up to 4tonne of pressure. Splits logs almost instantly upon contact, keeping labour and work time to a minimum. Features mesh cage and a two-hand operation push-button and lever for safe operation. Supplied with wheels for easy manoeuvrability. Optional Stand Model No. LS520HST available separately.

Maximum Log Diameter:	Ø250mm
Maximum Load Length:	370mm
Maximum Load Pressure:	4tonne
Motor Power:	1500W - 230V
Overall Size (W x D x H):	750 x 250 x 420mm
Weight:	37kg



**B 5tonne Log Splitter**  
520mm Capacity  
Model No. **LS520H**

Safe and easy way to split logs, offering continuous sizing and up to 5tonne of pressure. Splits logs almost instantly upon contact, keeping labour and work time to a minimum. Features mesh cage and a two-hand operation push-button and lever for safe operation. Supplied with wheels for easy manoeuvrability. Optional Stand Model No. LS520HST available separately.

Maximum Log Diameter:	Ø250mm
Maximum Load Length:	520mm
Maximum Load Pressure:	5tonne
Motor Power:	2200W - 230V
Overall Size (W x D x H):	940 x 270 x 510mm
Weight:	42kg



**C 6tonne Vertical Type Log Splitter**  
550mm Capacity  
Model No. **LS550V**

Safe and easy way to split logs, offering continuous sizing and up to 6tonne of pressure. Adjustable wedge allows workpiece to be as near to wedge as possible minimising splitting time. Features a two-hand safety operation, twin pull-in and push-down levers. Fitted with new CE standard guard.

Tier Log Lengths:	100-550mm
Maximum Log Diameter:	Ø300mm
Minimum Log Diameter:	Ø80mm
Vertical Ram Travel:	495mm
Minimum Log Length:	100mm
Maximum Load Pressure:	6tonne
Motor Power:	3000W - 230V
Overall Size (W x D x H):	915 x 840 x 1495mm
Weight:	98.2kg



**D 8tonne Vertical Type Hydraulic Log Splitter**  
575mm Capacity  
Model No. **LS575VH**

Safe and easy way to split logs, producing up to 8tonne of pressure. Seven tier wedge system allows workpiece to be as near to wedge as possible, therefore minimising splitting time. Operated by foot pump requiring a maximum of 15 strokes to capacity (without load) for easy and fast splitting.

Tier Log Lengths:	300, 350, 400, 450, 500, 550, 575mm
Maximum Log Diameter:	Ø160mm
Vertical Ram Travel:	158mm
Maximum Load Pressure:	8tonne
Overall Size (W x D x H):	285 x 540 x 1040mm
Weight:	30kg



**E Horizontal Log Splitter Stand for LS370H and LS520H**  
Model No. **LS520HST**



Powder coated steel frame for added longevity. Suitable for use with both Sealey LS370H and LS520H log splitters. Safely elevates log splitter to a more ergonomically suitable working height allowing its use without the need to bend down. Either log splitter, once mounted on the stand, can have its wheels transferred to the stand for easy manoeuvrability. Height of stand without splitter 740mm.

Height (without Log Splitter):	740mm
Height (with Model No. LS370H):	1160mm
Height (with Model No. LS520H):	1250mm
Weight:	7kg

A - C Trade Aluminium Step Ladders EN 131  
Model No. SEE BELOW

EN 131 Approved aluminium step ladders with 150kg capacity. Durable lightweight anodised aluminium alloy frame. Deep non-slip steps and wide platform with safety rail allow plenty of leg room for safe standing. Ribbed feet give full floor contact for extra stability.


	A	B	C
Model No:	ASL3S	ASL5	ASL7
Treads:	3	5	7
Weight:	3.7kg	4.7kg	7.3kg
Base Width:	415mm	440mm	520mm
Maximum Capacity:	150kg	150kg	150kg
Safety Rail Height:	1220mm	1660mm	2080mm
Platform Height:	610mm	1050mm	1480mm

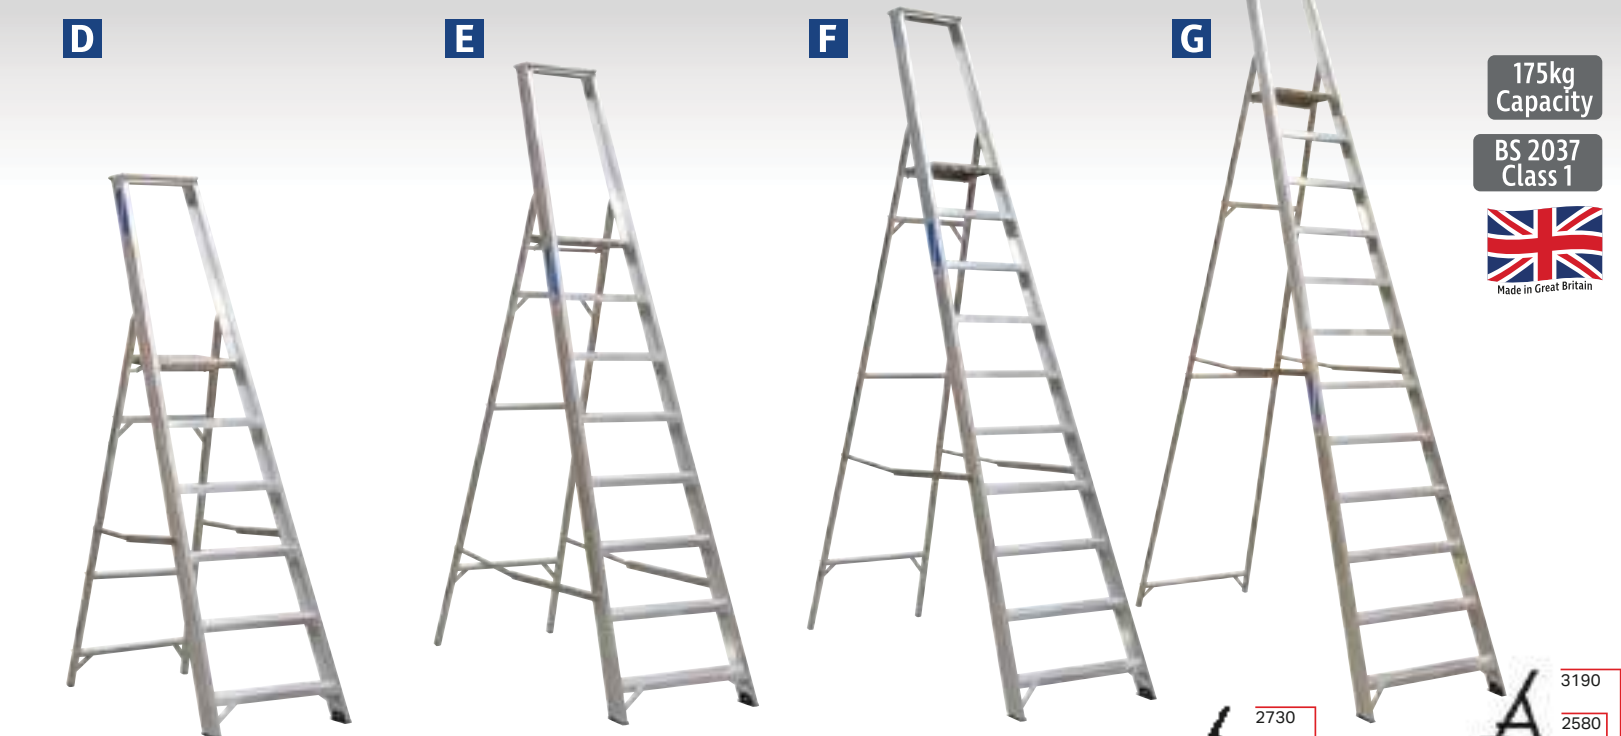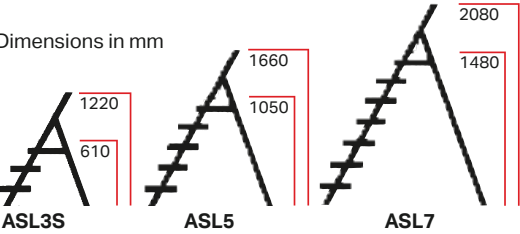

D - G Industrial Aluminium Step Ladders BS 2037  
Model No. SEE BELOW

BS 2037 Class 1 certified professional industrial aluminium platform steps. Rigid box section aluminium with heavy-duty cross brace for extra strength and stability. Double riveted extra-large non-slip treads. Wide platform and high safety rail allow plenty of leg room for safe standing.

	D	E	F	G
Model No:	AXL6	AXL8	AXL10	AXL12
Treads:	6	8	10	12
Weight:	6kg	7.25kg	8.8kg	9.8kg
Base Width:	480mm	510mm	560mm	630mm
Maximum Capacity:	175kg	175kg	175kg	175kg
Safety Rail Height:	1870mm	2320mm	2730mm	3190mm
Platform Height:	1230mm	1670mm	2120mm	2580mm

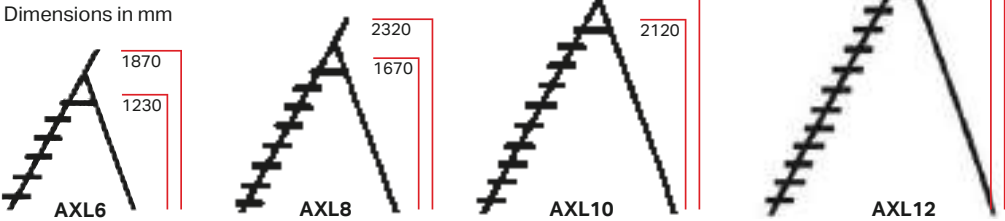

**Important Note:**  
There are three standards for ladders in the UK, Class 1, 2 and 3. EN 131 replaced BS 2037 Class 2. Confusion arises with the term /duty rating/, which British Standards arrive at through consideration of frequency and general conditions of use. For consistency we quote maximum static vertical load figures for all our ladders. We only offer trade and industrial ladders. See table to the right for clarification.

Class	Type	Standard	Max. Static Vertical Load	Duty Rating
Class 1	Industrial	BS 2037	175kg	130kg
Class 2	Trade	EN 131	150kg	n/a
Class 3	Domestic	BS 2037	125kg	95kg



## A - C Trade Aluminium Professional Fold-Flat Step Ladders EN 14183

Model No. SEE BELOW

EN 14183 Approved 150kg capacity step ladders professionally manufactured with brushed aluminium frames. Features large steps fitted with anti-slip rubber inserts and a large top step for added stability when working at height. Ladders fold down flat for easy storage and transportation. Fitted with four rubber feet for added stability. Available in 2, 3 and 4 step versions.

	A	B	C
Model No:	APSL2	APSL3	APSL4
Treads:	2	3	4
Safety Rail Height:	919mm	1174mm	1429mm
Platform Height:	467mm	722mm	977mm
Platform Size:	313 x 228mm	313 x 228mm	313 x 228mm
Maximum Capacity:	150kg	150kg	150kg

Dimensions in mm




## D - F Aluminium Extension Combination Ladders EN 131

Model No. SEE BELOW

Aluminium extension ladders manufactured to EN 131 standards. Ideal for the tradesman, these ladders can be used as a 2-Section or 3-Section extension and as a single ladder, which is ideal for 2-person use. Can be used as a step and extension step ladder where stability and height are needed. Compact size for easy handling and storage. Two larger models suitable to extend up to the apex of a house.

	D	E	F
Model No:	ACL307	ACL3	ACL312
Minimum Height:	2m	2.6m	3.4m
Maximum Extension:	4.2m	5.9m	7.9m
Maximum Reach:	5.1m	6.8m	8.8m
Maximum Capacity:	150kg	150kg	150kg
Weight:	9.8kg	12.2kg	16.5kg

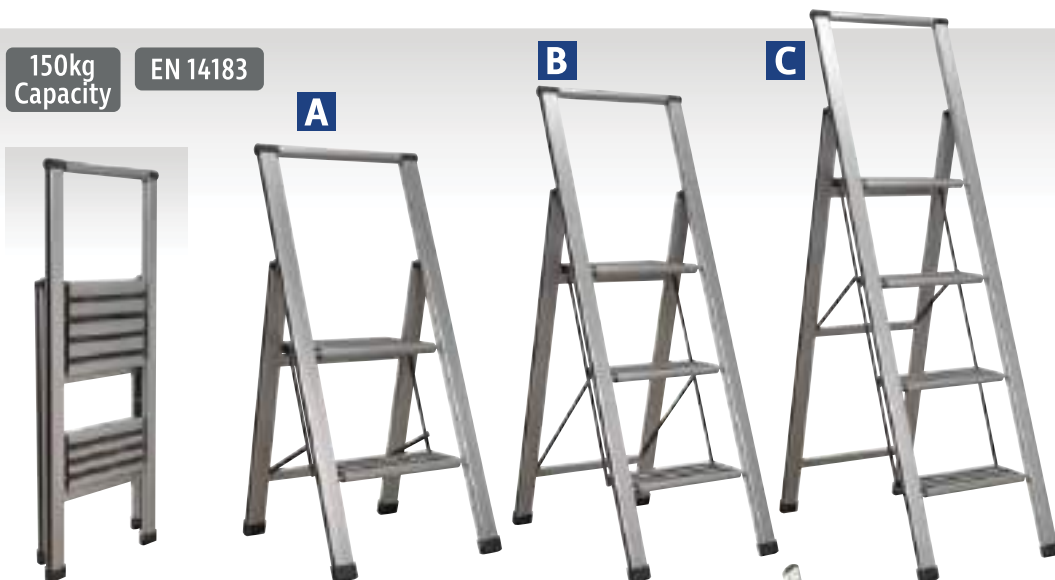

## Health and Safety Executive



### Keep Safe

Most ladder accidents are caused by human error, not by the ladders failing. The HSE website contains useful information including brochures enabling you to keep safe whilst working with ladders. Go online today to ensure you are safe at work or at home [www.hse.gov.uk](http://www.hse.gov.uk).

**A - C Trade Fibreglass Step Ladders EN 131**  
**Model No. SEE BELOW**

Heavy-duty fibreglass sides with slip resistant aluminium treads. Locking brace bars and anti-slip feet for added stability. Lightweight steps are non-conductive and ideal for site work. Certified to EN 131 standards.

	<b>A</b>	<b>B</b>	<b>C</b>
<b>Model No:</b>	<b>FSL5</b>	<b>FSL7</b>	<b>FSL10</b>
<b>Treads:</b>	4	6	9
<b>Height:</b>	1.4m	1.95m	2.75m
<b>Maximum Capacity:</b>	150kg	150kg	150kg
<b>Weight:</b>	5.7kg	7.6kg	10.6kg



**Important Note:** Check how many steps you are paying for. We only state the number you can use, the top tread is not for standing on but many companies still quote this figure.

**D - F Trade Aluminium Telescopic Ladders EN 131**  
**Model No. SEE RIGHT**

Extends and locks rung-by-rung allowing use at multiple heights. Innovative air dampened function ensures user safety while ladder is lowered. Easy storage and transportation make these ideal for surveyors, tradesmen and domestic use. Lightweight, corrosion resistant aluminium frame. Rubber feet offer increased stability while in use. Manufactured to EN 131 with 150kg capacity.



**D**

2.6m

**E**

3.2m

**F**

3.8m

**150kg Capacity**

**Certified to BS EN 131**

	<b>D</b>	<b>E</b>	<b>F</b>
<b>Model No:</b>	<b>ATL09</b>	<b>ATL11</b>	<b>ATL13</b>
<b>Treads:</b>	9	11	13
<b>Minimum Height:</b>	720mm	820mm	910mm
<b>Maximum Height:</b>	2630mm	3270mm	3810mm
<b>Maximum Capacity:</b>	150kg	150kg	150kg
<b>Weight:</b>	8kg	11.3kg	14.5kg



**A 4-Way Trade Aluminium Folding Platform Ladder EN 131**  
**Model No. AFPL1**


EN 131 Certified 4-way, 4-section, aluminium ladder. Six robust auto-latching locking hinges allow for multi-positioning. Can be used as a platform, straight ladder, step ladder or offset ladder. Extra safety provided by 12 reinforced rungs and stabiliser feet. Supplied with metal platform to use in platform/scaffold position.

A:	B:	C:	D:	E:	F:	Weight:
970	1730	260	970	610	3530mm	12.4kg

**B 4-Way Aluminium Adjustable Height Folding Platform Ladder EN 131**  
**Model No. AFPL2**

EN 131 Certified 4-way, 4-section, aluminium ladder. Six robust auto-latching locking hinges allow for multi-positioning. Can be used as a platform, straight ladder, step ladder or offset ladder. Extra safety provided by 12 reinforced rungs and stabiliser feet. Fitted with extendable legs providing increased climbing height. Supplied with metal platform to use in platform/scaffold position.

A:	B:	C:	D:	E:	F:	Weight:
650/910	1380/1645	340	910	730	2480/3370mm	14.5kg

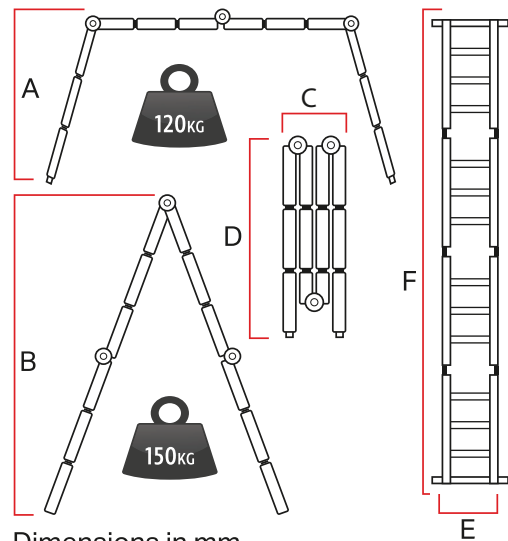

Dimensions in mm.

**C 4-Way Trade Aluminium Adjustable Height Telescopic Ladder EN 131**  
**Model No. AFPL3**

EN 131 Certified 4-way, 4-section, aluminium ladder. Can be used as a straight ladder, step ladder, offset ladder and extension ladder. Fitted with two robust auto-latching locking hinges for multi-positioning. Features extendable legs providing increased climbing height.

<b>Treads:</b>	16
<b>Folded Depth:</b>	190mm
<b>Folded Height:</b>	1405mm
<b>Width:</b>	600mm
<b>Step Ladder Height</b>	
Minimum/Maximum:	1320/2200mm
<b>Offset Ladder Height</b>	
Minimum/Maximum:	1400/2000mm
<b>Extension Ladder Height</b>	
Minimum/Maximum:	2720/4550mm
<b>Maximum Capacity:</b>	150kg
<b>Weight:</b>	15.6kg





**A** 2-Tread Aluminium Folding Platform EN 131  
Model No. APS2E

EN 131 Approved folding and portable aluminium platform with 150kg capacity. Large, ribbed non-slip platform and treads for safe and easy manoeuvrability. Durable aluminium alloy frame with ribbed feet provides extra stability. Safety locking catches on legs. Folds flat for easy storage and transportation.

Platform Size (W x D):	800 x 300mm
Dimensions (W x D x H):	1250 x 400 x 605mm
Maximum Capacity:	150kg
Weight:	5.6kg



**B** 2-Tread Trade Aluminium Folding Platform EN 14183  
Model No. APS2

EN 14183 Approved folding and portable aluminium platform with 150kg capacity. Large, ribbed non-slip platform and treads for safe and easy manoeuvrability. Durable aluminium alloy frame with ribbed feet provides extra stability. Safety locking catches on legs. Folds flat for easy storage and transportation.

Platform Size (W x D):	950 x 300mm
Dimensions (W x D x H):	1280 x 495 x 500mm
Maximum Capacity:	150kg
Weight:	7.2kg

**C** Heavy-Duty Platform Safety Step  
Model No. KS5

Robust, lightweight platform safety step featuring a large 390 x 390mm step surface area. Features 4-way access and anti-slip strips to aid stability when in use. Fitted with four non-slip pads on each corner to prevent movement when in use. Unit is brightly coloured and due to its angled design will not tip over, even when weight is on the edges making this model safe to work on.

Top Step Size (W x D):	390 x 390mm
Base Size (W x D):	505 x 505mm
Step Heights:	200, 380mm
Maximum Capacity:	150kg



**D-E**

150kg Capacity  
EN 14183



**D-E** Trade Step Stools  
EN 14183  
Model No. SEE BELOW

EN 14183 Approved steps with 150kg capacity tubular metal construction with composite feet for added stability. Features large anti-slip treads. Foam cushioned hand rail for added comfort. Suitable also as a stool. Folds flat for easy storage and transportation.

	<b>D</b>	<b>E</b>
Model No:	ASL2	ASL23
Treads:	2	3
Top Step Height:	460mm	710mm
Floor Area:	570 x 480mm	640 x 480mm
Maximum Capacity:	150kg	150kg



**F-H** Kick Steps  
Model No. SEE BELOW

Heavy-duty construction with non-slip surface. Three spring-loaded wheels allow steps to glide over floor, yet sit down firmly on rubber stops when load is applied.

	<b>F</b>	<b>G</b>	<b>H</b>
Model No:	KS2	KS1	KS4
Material:	Composite	Steel	Composite
Step Heights:	220, 420mm	220, 430mm	210, 430mm
Base Size:	Ø440mm	Ø440mm	Ø430mm
Maximum Capacity:	150kg	150kg	150kg



## A Warehouse Steps Model No. SEE BELOW

Heavy-duty warehouse steps manufactured from industrial strength aluminium. Fitted with non-slip treads, safety hand rails and cross braced frame for added strength and stability. Features large chequered top platform for extra grip and polyurethane wheels for easy manoeuvrability. Maximum capacity 150kg. Model No's WS8-WS14 supplied flat packed. These products are delivered directly from our factory.



Available with  
3 - 14 Treads

150kg  
Capacity



Model No:	Treads:	Platform Height:	Overall Height:	Overall Width:	Overall Depth:	Maximum Capacity:	Weight:
WS3	3	740mm	1320mm	480mm	790mm	150kg	9.9kg
WS4	4	980mm	1630mm	510mm	910mm	150kg	10.6kg
WS5	5	1220mm	1880mm	530mm	1070mm	150kg	11.3kg
WS6	6	1450mm	2060mm	560mm	1190mm	150kg	12.7kg
WS7	7	1700mm	2310mm	580mm	1300mm	150kg	14.5kg
WS8	8	1940mm	2540mm	610mm	1470mm	150kg	15.9kg
WS9	9	2170mm	2790mm	640mm	1630mm	150kg	17.4kg
WS10	10	2410mm	3050mm	660mm	1800mm	150kg	20kg
WS12	12	2900mm	3580mm	710mm	2130mm	150kg	23.6kg
WS13	13	3120mm	3810mm	740mm	2340mm	150kg	25kg
WS14	14	3400mm	4060mm	760mm	2540mm	150kg	26.8kg



These products are manufactured to order and, due to the size, are delivered direct from our factory to all areas within the UK mainland. Please allow at least 15 working days for delivery and provide the full address, postcode, contact and telephone number for the place of delivery.

Please be aware that additional carriage charges will apply to Scottish postcodes which are **NOT** AB, DD, DG, EH, FK, G, KA, KY, ML & TD for WS range and **NOT** AB, DD, DG, EH, G, ML & TD for MSS range. Deliveries to Northern Ireland, Republic of Ireland, Isle of Man, Isle of Wight, Jersey, Guernsey and other offshore islands have to be individually priced on application and are outside of our normal carriage paid terms.



Available with  
2 - 15 Treads

300kg  
Capacity



Model No's  
MSS08 - MSS15



## C Ø400mm Wall Mounting Convex Mirror Model No. CM400

Convex mirror for improved visibility. Supplied with wall fixing and swivel joint, allowing for quick and easy positioning. Ideal for use as a safety or security mirror.

Size: Ø400mm

## B Mobile Safety Steps Model No. SEE BELOW

Robust, round steel tube construction with non-slip step treads. Two fixed wheels and two retractable castors give mobility and allow easy positioning. Castor lock-down lever, on models with five or more treads, restricts tread access as a reminder to retract castors before climbing. 150mm Kick board on three sides of platform.

Model No:	Treads:	Platform Height:	Tread (W x D):	Platform (W x D):	Overall Size (W x D x H):	Weight:
MSS02	2	500mm	550 x 200mm	550 x 400mm	650 x 590 x 1500mm	20kg
MSS03	3	750mm	550 x 200mm	550 x 400mm	650 x 760 x 1750mm	28kg
MSS04	4	1000mm	550 x 200mm	550 x 400mm	650 x 910 x 2000mm	32kg
MSS05	5	1250mm	550 x 200mm	550 x 400mm	835 x 1270 x 2250mm	55kg
MSS06	6	1500mm	550 x 200mm	550 x 400mm	835 x 1360 x 2500mm	62kg
MSS07	7	1750mm	550 x 200mm	550 x 400mm	850 x 1450 x 2750mm	70kg
MSS08	8	2000mm	550 x 200mm	550 x 400mm	850 x 1575 x 3000mm	78kg
MSS09	9	2250mm	550 x 200mm	550 x 400mm	850 x 1730 x 3250mm	90kg
MSS10	10	2500mm	550 x 200mm	550 x 400mm	1000 x 1905 x 3500mm	98kg
MSS11	11	2750mm	550 x 200mm	550 x 400mm	1000 x 2070 x 3750mm	105kg
MSS12	12	3000mm	550 x 200mm	550 x 400mm	1000 x 2230 x 4000mm	116kg
MSS13	13	3250mm	550 x 200mm	550 x 400mm	1230 x 2470 x 4250mm	125kg
MSS14	14	3500mm	550 x 200mm	550 x 400mm	1230 x 2630 x 4500mm	130kg
MSS15	15	3750mm	550 x 200mm	550 x 400mm	1320 x 2795 x 4750mm	138kg



**A 3-Section Loft Ladder**  
Model No. LFT03

Aluminium loft ladder manufactured to BS 14975:2006. Supplied with hand rail and all fixing components for quick and easy installation. 3-Section design enables ladder to fit in smaller areas than standard 2-Section ladders.

<b>Loft Opening (W x L):</b>	432 x 508mm
<b>Maximum Height:</b>	3m
<b>Loft Clearance:</b>	1050mm
<b>Maximum Capacity:</b>	150kg



**B Ladder Stand-Off**  
Model No. LAD002

Aluminium framed stand-off, offers superb stability at the top of a ladder with a wide span of 1000mm. Positions ladder 360mm away from work area. Fitted with rubber feet to help prevent slipping. Supplied with easy installation instructions.

<b>Span Width:</b>	1000mm
<b>Stand-Off:</b>	360mm



**C 2-Way Ladder Stand-Off**  
Model No. LAD004

Heat-treated aluminium framed ladder stand-off improves stability and fits to any ladder. The "V" Type design can be used on flat surfaces, corners or over down pipes. Fitted with rubber feet to prevent slipping and positions ladder 250-400mm away from wall. Quick and easy to assemble.


<b>Span Width:</b>	700mm
<b>Stand-Off:</b>	250-400mm
<b>Maximum Capacity:</b>	110kg



**D Anti-Slip Ladder Mat**  
Model No. ASLM1

Manufactured from a hard-wearing rubber compound, which grips on the smoothest of surfaces. Prevents ladders from slipping and/or sinking into soft ground during use. Helps protect flooring on delicate surfaces. Overall width of 960mm makes this suitable for use with all popular ladders.

<b>Size (W x D x H):</b>	960 x 240 x 55mm
<b>Weight:</b>	5.68kg

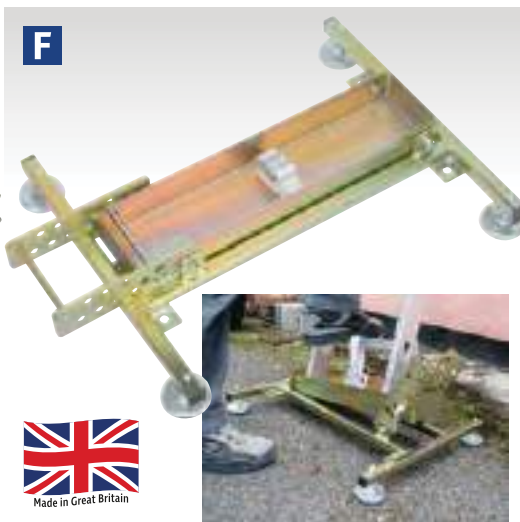

**F Ladder Stabiliser**  
Model No. LAD001

Safe and easy way to stabilise your ladder on even or uneven surfaces. Yellow phosphate finish for added corrosion resistance. Suitable for trades where ladders need to be used for on site applications. Features heavy-duty metal feet fitted with non-slip rubber pads for added grip and four eyelets for pegging to ground (pegs not included). Tray is adjustable for angle and includes an integral tie down to secure ladder. Increases ladder footprint from 26cm<sup>2</sup> to 3097cm<sup>2</sup>. Made in the UK.

<b>Ladder Tray (W x D):</b>	500 x 125mm
<b>Overall Size (W x D x H):</b>	605 x 515 x 112mm



**G Ladder Roof Hook**  
Model No. LAD003

Safe and easy way to access a roof with your ladder. Lightweight aluminium design. Suitable for trades where ladders need to be used for on site applications. Features non-slip composite wheel and 'r'-shape hooks with anti-slip rubber feet. Made in the UK.

<b>Maximum Capacity:</b>	150kg
--------------------------	-------



**E Ladder Roof Rack Clamps**  
Model No. SLC2

Universal fitment for roof racks providing a safe and easy way to secure ladders. Yellow phosphate finish for added corrosion resistance. Suitable for trades where ladders need to be transported safely for on site applications. Supplied with two heavy-duty iron padlocks for security. Made in the UK.

<b>Maximum Width:</b>	365mm
-----------------------	-------



**A - C Platform Scaffold Tower EN 1004**  
**Model No. SEE BELOW**

EN 1004 Approved Scaffold Tower System designed to meet the UK PASMA T3 standards. Robust aluminium frame unit with durable corrosion resistance. Heavy-duty platform with trap door for safe access to platform. Model No. SSCL1 can be used as a 3m or 3.8m working height platform. This can be increased to 5.5m or 7.15m by fitting extension kit Model No's SSCL3 and SSCL4. Unique design enables the unit to be quickly and easily folded down without tools for transportation or storage. 860mm Depth means unit will pass through most doorways even when partly erected. Hand rails for comfort and safety. Four large Ø125mm castors for easy mobility. Maximum capacity 200kg.

<b>A Model No:</b>	<b>SSCL1</b>
<b>Description:</b>	Base Pack
<b>Maximum Platform Height:</b>	1.8m
<b>Maximum Working Height:</b>	3.8m
<b>Width:</b>	1780mm
<b>Depth:</b>	860mm
<b>Weight:</b>	45kg
<b>B Model No:</b>	<b>SSCL3</b>
<b>Description:</b>	Extension Pack
<b>Maximum Platform Height:</b>	3.5m*
<b>Maximum Working Height:</b>	5.5m*
<b>Width/Width with Support Legs:</b>	1780/3810mm*
<b>Depth:</b>	860mm
<b>Weight:</b>	35kg
<b>C Model No:</b>	<b>SSCL4</b>
<b>Description:</b>	Extension Pack
<b>Maximum Platform Height:</b>	5.15m**
<b>Maximum Working Height:</b>	7.15m**
<b>Width/Width with Support Legs:</b>	1780/3810mm**
<b>Depth:</b>	860mm
<b>Weight:</b>	10kg


\* Only when used with SSCL1.  
 \*\* Only when used with SSCL1 & SSCL3.

**IMPORTANT** - Base Pack SSCL1 must be purchased first. SSCL3 Can only be fitted to SSCL1 and SSCL4 can only be fitted to SSCL3 and SSCL1. In order to achieve platform height of 1.8m SSCL1 must be ordered. For 3.5m SSCL1 and SSCL3 and for 5.15m SSCL1, SSCL3 and SSCL4.

**D 4-Way Aluminium Scaffold Ladder EN 131**  
**Model No. ASCL2**

EN 131 Approved 4-way scaffold ladder. Two six rung aluminium ladders can be used as extending ladder, single ladders, step ladder or complete scaffolding unit. Supplied with hand rail.

Maximum Capacity:						150kg
A:	B:	C:	D:	E:	F:	Weight:
2700	1600	1670	1320	950	785	14.7kg

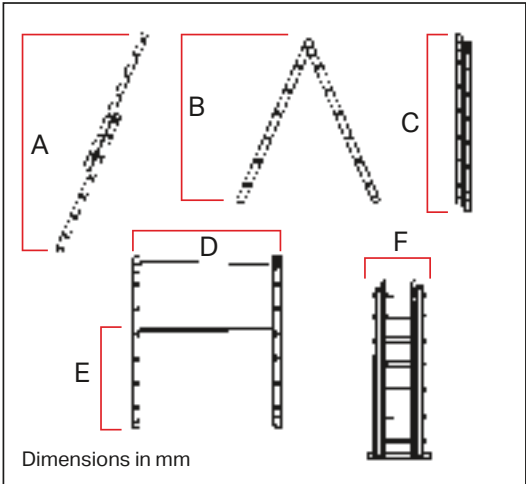

## A - D Towing Plugs

Model No. **SEE BELOW**

<b>A</b> TB05	12V Towing Plug 7-Pin N-Type Plastic
<b>B</b> TB06	12V Towing Plug 7-Pin N-Type Metal
<b>C</b> TB53	12V Towing Plug 13-Pin Euro Plastic
<b>D</b> TB54	12V Towing Plug 13-Pin Euro Plastic Twin Inlet

## E - F Socket Conversion Adaptors

Model No. **SEE BELOW**

<b>E</b> TB43	12V 7-Pin N-Type - 13-Pin Euro
Adaptor plugs into towing vehicle's 7-pin N-type socket to allow connection of a caravan or trailer with 13-pin Euro plug.	
<b>F</b> TB44	12V 13-Pin Euro - 7-Pin N-Type
Adaptor plugs into towing vehicle's 13-pin Euro socket to allow connection of a caravan or trailer with UK standard 7-pin N-type plug.	

## G - I Towing Sockets

Model No. **SEE BELOW**

<b>G</b> TB07	12V Towing Socket 7-Pin N-Type Plastic
<b>H</b> TB08	12V Towing Socket 7-Pin N-Type Metal
<b>I</b> TB52	12V Towing Socket 13-Pin Euro Plastic



## J Conversion Lead - 13-Pin Euro To 7-Pin N & S-Type Plugs

Model No. **TB55**

Converts 13-pin Euro vehicle socket to 7-pin N-type and 7-pin S-type caravan and trailer socket. Fitted with 200mm cable.

**Type:** 12V 13-Pin Euro to 7-Pin N & S-Type Sockets



## K 12V Towing Socket Assembly N-Type

Model No. **TB11**

Complete assembly includes 1.5m 7-core cable with pre-wired 12V 7-pin N-type socket. Metal plate with pre-formed mounting points at 90mm centres.

## L 6m Extension Lead 7-Pin N-Type

Model No. **TB57**

6m Extension lead fitted with 12V 7-pin N-type socket and 12V 7-pin N-type plug. Extends existing power supply to your trailer or caravan.



## A - C Lighting Sets

Model No. SEE BELOW

### A TB12 12V Number Plate Lamp

Standard, E-Approved, 12V lamp. Supplied with bulb.

Size (W x D x H): 110 x 39 x 45mm

### B TB18 12V Rear Square Lamp Cluster

4-Function, E-Approved, square lamp cluster, stop, tail, indicator and number plate illumination. Supplied with bulbs.


Size (W x D x H): 98 x 49 x 98mm

Replacement Square Lamp Lens: TB181

### C TB19 12V Rear Rectangular Lamp Cluster

4-Function, E-Approved, rectangular lamp cluster, stop, tail, indicator and number plate illumination. Supplied with bulbs.

Size (W x D x H): 168 x 50 x 82mm

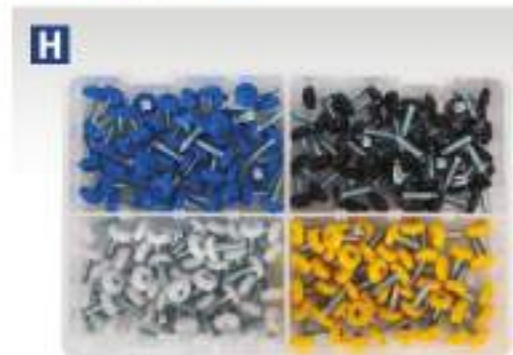

### H 200pc Number Plate Screw Assortment Plastic Enclosed Head

Model No. ABO76NP

Colours: Blue, Black, White, Yellow

Size: Ø4.8 x 18mm

Quantity: 200



### D 12/24V 80 LED Mini Light Bar - Magnetic Base

Model No. MLB80MB

Extremely bright 80-amber LED high intensity mini light bar fitted with two high strength magnets for ease of installation. 10 Modules fitted with 8 LEDs creating a 360° light. Fitted with a 3m cable and 12V vehicle accessory socket. Plug includes two switches, on/off and a momentary switch, giving you the option of 10 different flash patterns. Built-in memory recalls last pattern selected. ECE R65 & R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply: 12-24V DC

Temperature Range: -30°C to +50°C

Dimensions (W x D x H): 279 x 165 x 61mm

Nett Weight: 1.2kg



### E 12/24V 80 LED Mini Light Bar - Single Bolt Fixing

Model No. MLB80SB

Extremely bright 80-amber LED high intensity mini light bar fitted with a 10mm single bolt fixing. 10 Modules fitted with 8 LEDs, creating a 360° light. Built-in 10 option flash pattern that has a built-in memory which recalls the last pattern selected. ECE R65 & R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply: 12-24V DC

Temperature Range: -30°C to +50°C

Dimensions (W x D x H): 279 x 165 x 61mm

Nett Weight: 1kg



### F - G Reflex Reflectors

Model No. SEE BELOW

#### F TB24 Reflex Reflector Red Oblong - Pack of 2

Pair of E-Approved, red, reflex reflectors.

Dimensions (W x D x H): 75 x 10 x 46mm

#### G TB17 Rear Reflective Red Triangle - Pack of 2

Pair of E-Approved, red, reflex reflector triangles.

Size (W x D x H): 160 x 7 x 140mm



### I - K Mudguards

Model No. SEE BELOW

Trailer mudguards, injection moulded in durable high density polyethylene.

#### I TB31 Mudguard for 200mm(8") Wheels

Size (W x D x H): 490 x 140 x 195mm

#### J TB32 Mudguard for 250mm(10") Wheels

Size (W x D x H): 620 x 180 x 240mm

#### K TB33 Mudguard for 330mm(13") Wheels

Size (W x D x H): 760 x 220 x 335mm





**A** 12/24V LED Number Plate Lamp  
Model No. TB12LED

5 x SMD LED number plate illumination lamp is waterproof and E-Marked. Dual voltage 12/24V for car and commercial. Lamp supplied with twin cables.



**B** 12/24V LED Reverse Lamp  
Model No. TB13LED

19 x SMD LED reverse lamp is waterproof and E-Marked. Dual voltage 12/24V for car and commercial. Lamp supplied with twin cables.



**C** 12/24V LED Rear Fog Lamp  
Model No. TB14LED

19 x SMD LED rear fog lamp is waterproof and E-Marked. Dual voltage 12/24V for car and commercial. Lamp supplied with twin cables.



**D** 12V LED Rear Square Lamp Cluster  
Model No. TB18LED

Easy install and modern direct replacement. 5-Function SMD LED rear cluster includes - Stop/Tail/Indicator/Number Plate Illumination/Reflector. R10, CE and E-Marked.



**E** 12V LED Rear Rectangle Lamp Cluster - Pair  
Model No. TB19LED

Easy install and modern direct replacement set. 6-Function SMD LED rear cluster set includes - Stop/Tail/Indicator/Number Plate Illumination/Reflector/Rear Fog (left)/Reverse (right). R10, CE and E-Marked.



**F** 12/24V LED Side Marker Lamp Dual Lens  
Model No. TB44LED

6 x SMD LED dual marker lamp. Dual voltage for car and commercial. EPDM high quality rubber fitted with a clear lens on the front and red lens on the rear. Fitted with 2-core cable. E-Marked.



**G** 12/24V LED 45°  
Stalk Side Marker Lamp (Left)  
Model No. TB45LEDL

6 x SMD LED dual marker lamp (Left). Dual voltage for car and commercial. EPDM high quality rubber fitted with a clear lens on the front and red lens on the rear. Fitted with 2-core cable. E-Marked.



**H** 12/24V LED 45°  
Stalk Side Marker Lamp (Right)  
Model No. TB45LEDR

6 x SMD LED dual marker lamp (Right). Dual voltage for car and commercial. EPDM high quality rubber fitted with a clear lens on the front and red lens on the rear. Fitted with 2-core cable. E-Marked.



**I** 12/24V LED Side Marker Lamp  
Model No. TB51LED

Amber side marker light is dual voltage 12/24V for car and commercial. Fitted with 15cm of 2-core cable. Waterproof and E-Marked.



**J** 12/24V LED Front Marker Lamp  
Model No. TB52LED

Clear front marker light is dual voltage 12/24V for car and commercial. Fitted with 15cm of 2-core cable. Waterproof and E-Marked.



**K** Towing Mirror Extension  
Model No. TB63

Convex towing mirror offers a wider field of vision while towing caravans or trailers. Universal fit will clip onto most wing mirrors. Easy to adjust, both horizontally and vertically. It is a legal requirement to fit an extension mirror when a caravan or trailer obstructs the towing vehicle's vision. Full EU approval.



### A 2pc Lighting Board Set with 10m Cable & 12V Plug

Model No. TB0212

Two durable plastic boards fitted with 3m coiled cable and 10m of 7-core cable with 12V N-type plug. Each panel has one E-Approved reflective triangle, one 4-function lamp cluster (stop, tail, indicator and number plate illumination light) and four pre-drilled mounting points.

Size (W x H): 190mm(7.5") x 285mm(11.2")

### B 3ft Bicycle Carrier Lighting Board with 2m Cable

Model No. TB3/2

Composite 3ft board fitted with 2m of 7-core cable and 12V N-type plug. Includes two E-Approved reflectors and two 4-function lamp clusters (stop, tail, indicator and number plate illumination light).

**Important: Standard trailer boards should not be used in conjunction with cycle carriers.**

### C-D 12V Trailer Boards

Model No. SEE BELOW

C TB4/5

4ft Trailer Board

Composite board fitted with 5m of 7-core cable and 12V N-type plug. Includes two E-Approved reflective triangles and two 4-function lamp clusters (stop, tail, indicator and number plate illumination light). Pre-drilled mounting points (905mm centres).

Size (W x H): 1200mm(4') x 139mm(5.5")

D TB46/6

4ft 6in Trailer Board with Fog Light

Composite board fitted with 6m of 7-core cable and 12V N-type plug. Includes two E-Approved reflective triangles, two 4-function lamp clusters (stop, tail, indicator and number plate illumination light) and fog lamp. Pre-drilled mounting points (905mm centres).

Size (W x H): 1370mm(4'6") x 139mm(5.5")

E

### E 12V 4ft LED Trailer Board

Model No. TB4/5LED

Composite 4ft board fitted with 5m of 7-core cable and 12V 7-pin N-type plug. Includes two E-Approved triangle reflectors and two 5-function SMD LED rear square clusters (Stop, Tail, Indicator, Number Plate Illumination and Reflector). Can easily adapt to 13-pin using Model No. TB44, see page 1144.

Size (W x H): 1220mm (4') x 139mm(5.5")


G

Magnetic

### G 12V LED Magnetic Rear Lighting Set

Model No. TB18LED MAG

Easy-to-install modern direct replacement magnetic trailer lighting set. 5-Function SMD LED rear cluster includes Stop/Tail/Indicator/Number Plate Illumination/Reflector. Includes 2.5m of 7-core connecting cable and 7.5m main cable fitted with 12V 7-pin N-type plug. R10, CE and E-Marked.

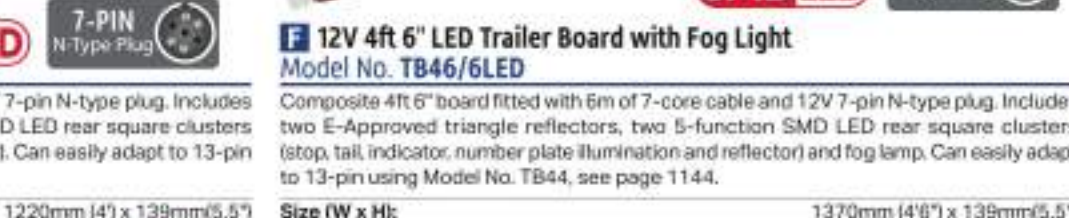

## A - B Mounting Plates

Model No. [SEE BELOW](#)

### A TB61 Single Socket Mounting Plate

Single socket mounting plate fits to tow bar/balls. Accepts N-type, S-type and 13-pin Euro sockets. Metal plate with preformed mounting points at 90mm centres.

### B TB62 Double Socket Mounting Plate

Double socket mounting plate fits to tow bars/balls. Accepts N-type, S-type and 13-pin Euro sockets. Metal plate with preformed mounting points at 90mm centres.

## C - E Bumper Protection Plates

Model No. [SEE BELOW](#)

### C TB30 Bumper Protection Plate

Designed to protect bumpers when coupling up trailers. Pre-drilled mounting points at 90mm centres.

Size (W x H): 140 x 170mm

### D TB301 Stainless Steel Bumper Protection Plate

Designed to protect bumpers when coupling up trailer. Stainless steel with pre-drilled mounting points at 90mm centres.

Size (W x H): 150 x 180mm

### E TB302 Stainless Steel Bumper Protection Plate

Designed to protect bumpers when coupling up trailer. Stainless steel plate with mounts for two sockets and pre-drilled mounting points at 90mm centres.

Size (W x H): 300 x 180mm

## F - G Tow-Ball Assemblies & Accessories

Model No. [SEE BELOW](#)

### F TB03E Ø50mm Tow-Ball

50mm Forged, E-Approved, tow-ball designed to comply with European legislation and for fitting to vehicles manufactured after 1st August 1998. Pre-cast mounting points at 90mm centres.

Size (W x D x H): 127 x 83 x 120mm

Ball Size: Ø50mm

### G TB042 50mm Tow-Ball & Pin Coupling

50mm Forged tow-ball with 19mm pin coupling assembly. Maximum load 3000kg on pin and 1500kg on ball. Pre-drilled mounting points at 90mm centres. Not for use on cars or car-derived vans first registered on or after 1st August 1998.

Aperture: 45mm

Size (W x D x H): 140 x 85 x 150mm

Ball Size: Ø50mm

## H - J Tow-Ball Covers

Model No. [SEE BELOW](#)

### H TB10 PVC Tow-Ball Cover

Black plastic cover for Ø50mm tow-ball, 62mm high. Suitable for use with Model No's TB03E and TB042.

### I TB101 PVC Tow-Ball Cover

Black plastic cover for Ø50mm tow-ball, 62mm high. Suitable for use with Model No. TB03E.

### J TB102 PVC Tow-Ball Cover with Reflector


Black plastic cover for Ø50mm tow-ball, 62mm high. Integral reflector increases visibility in poor or dark weather conditions. Suitable for use with Model No. TB03E.



### K 25mm Tow-Ball Spacer Block

Model No. [TB48](#)

Provides 25mm extra clearance between tow-ball and bumper or accessories.

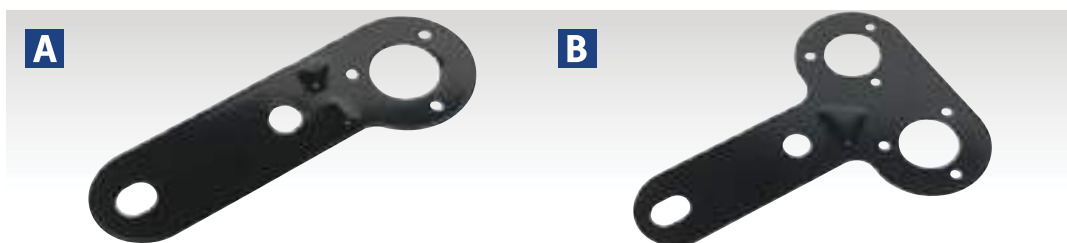

### L Tow-Ball Bolts & Nuts M16 x 55mm - Pack of 2

Model No. [TB27](#)

High tensile M16 x 55mm bolts with nuts and shake-proof washers for fixing tow-ball assemblies.



For our full range of Tarpaulins, see page 1162.





**A Jockey Wheel & Ø35mm Clamp  
Ø150mm Solid Wheel**  
Model No. **TB371**

Heavy-duty jockey wheel with Ø35mm clamp. Ø150mm Steel wheel with solid rubber tyre. Zinc plated for added corrosion resistance.

<b>Capacity:</b>	80kg
<b>Minimum Height:</b>	515mm
<b>Maximum Height:</b>	725mm
<b>Wheel Size:</b>	Ø150 x 24mm



**B Jockey Wheel & Ø50mm Clamp  
Ø200mm Solid Wheel**  
Model No. **TB37**

Heavy-duty jockey wheel with Ø50mm clamp. Ø200mm Steel wheel with solid rubber tyre. Zinc plated for corrosion resistance.

<b>Capacity:</b>	150kg
<b>Minimum Height:</b>	580mm
<b>Maximum Height:</b>	810mm
<b>Wheel Size:</b>	Ø200 x 45mm



**C Jockey Wheel & Ø48mm Clamp  
Ø260mm Pneumatic Wheel**  
Model No. **TB372**

Heavy-duty jockey wheel with Ø48mm clamp. Ø260mm Steel wheel with pneumatic tyre. Zinc plated for added corrosion resistance.

<b>Capacity:</b>	150kg
<b>Minimum Height:</b>	630mm
<b>Maximum Height:</b>	860mm
<b>Wheel Size:</b>	Ø260 x 80mm



**D Trailer Jack & Clamp  
250mm Travel - 900kg Capacity**  
Model No. **TB373**

Heavy-duty trailer jack with swivel mounting. Suitable for handling trailers with heavy nose weight. Integral swivel weld-on mounting.

<b>Capacity:</b>	900kg
<b>Minimum Height:</b>	230mm
<b>Maximum Height:</b>	480mm



**E Ø50mm Towing Hitch - 750kg Capacity**  
Model No. **TB36**

Steel, lockable, towing hitch, E-Approved, accepts Ø50mm tow-ball.

<b>Capacity:</b>	750kg
------------------	-------



**F Lock & Key for Ø50mm Hitch**  
Model No. **TB36/LK**

Prevents hitch from being lifted off tow ball.



**G Ø50mm Tow-Ball Lock**  
Model No. **TB38**

Universal fitting Ø50mm tow-ball lock expands in coupler to prevent towing away. Quick and easy to install. Non-corrosive.



**H Ø50mm Tow-Ball Trailer Hitch Lock**  
Model No. **TB45**

Universal fitting Ø50mm tow-ball trailer hitch lock. 12mm Steel bar and cast steel body helps protect against trailer and caravan theft. Easy to install and remove. Supplied with three keys.



**I - J Breakaway Cables**  
Model No. **SEE BELOW**

A legal requirement. Applies the handbrake on braked caravans and trailers in the event of accidental unhitching. Supplied with heavy-duty split ring and securing clip. PVC Coated for extra durability.


<b>Model No:</b>	<b>Size:</b>
<b>I TB46</b>	1m x 2mm
<b>J TB47</b>	1m x 3mm

A - B Ratchet Power Pullers  
Model No. SEE RIGHT

These hand operated devices are perfect for moving vehicles, logs, machines and other heavy objects. Vehicles must be in a condition capable of acting as a rolling load within the rated capacity. Both models are delivered ready for use with wire rope already installed and fitted with ratchet safety devices. Model No. HP1500 is equipped with double ratchet safety device and double ratcheting mechanism for applying the load evenly and with minimum effort. Side frames are manufactured in one-piece from best quality steel and zinc chrome plated for long term corrosion resistance. Perfect for marine, industrial and automotive applications.




**IMPORTANT**  
Hand power pullers are not designed or certificated for lifting or slinging loads. They are intended only as pulling/ tensioning devices and should be used with care. Capacities indicated are pulling capacities only.

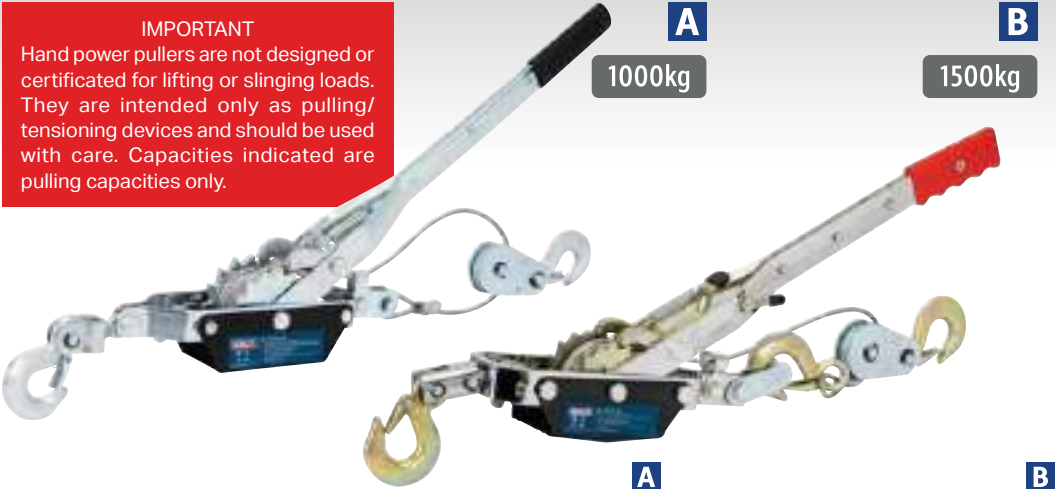

	A	B
Model No:	HP1000	HP1500
Capacity:	1000kg	1500kg
Breaking Strain:	2000kg	4000kg
Chassis Thickness:	3mm	6mm
Gear/Pawl Type:	Double/Single	Double/Double
Cable Diameter/Length:	Ø4.8mm/2.6m	Ø5mm/3m
Number of Hooks:	2	3

C - D Ratchet Power Pullers  
Model No. SEE RIGHT

Hand operated pullers, ideal for lifting and moving vehicles, logs, machines and other heavy objects. All models feature two levers for extra control when pulling or releasing load. Additional quick release lever saves time when adjusting rope length. Supplied with removable lever handle and 20m of wire rope with heavy-duty hook.

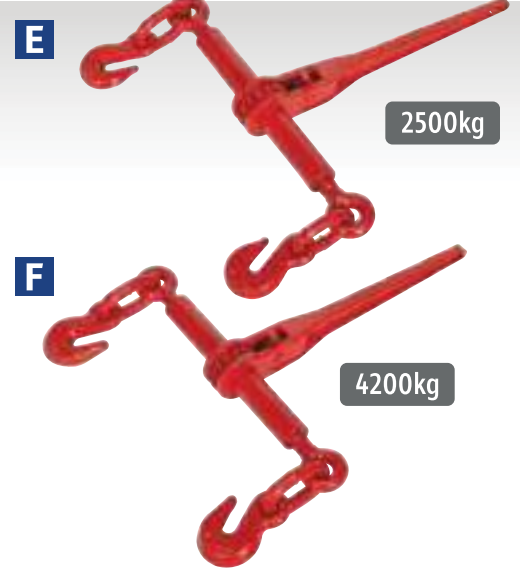

	C	D
Model No:	WRP1600	WRP3200
Rated Capacity:	1600kg	3200kg
Wire Rope Diameter:	Ø11mm	Ø16mm
Wire Rope Length:	20m	20m
Weight:	27kg	48kg

E - F Ratchet Load Binders  
Model No. SEE BELOW

Manufactured from heat treated, drop-forged steel for added strength. Suitable for clamping, binding, anchoring and tying down large loads. Ideal for farmers and commercial drivers. Fitted with 354mm handle for extra leverage.

	E	F
Model No:	LB001	LB002
Working Load:	2500kg	4200kg
Breaking Strength:	8636kg	8636kg
Chain Size:	7.9-9.5mm	9.5-12.7mm
Handle Length:	354mm	354mm
Hook:	Double	Double
Weight:	4.8kg	5.9kg



G Wire Rope Protective Cover  
Model No. WRD01

Wire rope dampener is designed to absorb winch and puller rope energy if rope failure occurs when pulling a heavy load. Heavy-duty vinyl with silver reflective tape for night-time visibility.

Size (W x H):	50 x 45mm
Weight:	0.9kg



H E-Approved Warning Triangle  
Model No. TB40

High quality, compact, folding warning triangle supplied in tough composite case. Legal requirement in many countries. Suitable for use following accidents/breakdowns. Complies with ECE R27 and is 'E' marked.

Size (W x H):	410 x 440mm
---------------	-------------



## A - F Manual Geared Winches

Model No. [SEE BELOW](#)

Manufactured from hardened steel with a heavy plate chassis. Features a single or double gear mechanism for smooth and easy operation. Includes manual brake, allowing the user to adjust the restriction placed on the webbing or cable. Suitable for general and recovery operations. Three options available; with empty drum, with wire cable or with webbing strap, all in two capacities.



	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
<b>Model No:</b>	<b>GWE1200M</b>	<b>GWE2000M</b>	<b>GWC1200M</b>	<b>GWC2000M</b>	<b>GWW1200M</b>	<b>GWW2000M</b>
<b>Capacity:</b>	540kg	900kg	540kg	900kg	540kg	900kg
<b>Gear Ratio:</b>	4:1	4:1/8:1	4:1	4:1/8:1	4:1	4:1/8:1
<b>Hub Diameter:</b>	Ø20mm	Ø20mm	Ø20mm	Ø20mm	Ø20mm	Ø20mm
<b>Maximum Cable/Webbing Size:</b>	Ø5.1mm x 10m (cable not included)	Ø5.1mm x 10m (cable not included)	Ø5.1mm x 10m (cable supplied)	Ø5.1mm x 10m (cable supplied)	50mm x 7m (webbing supplied)	50mm x 10m (webbing supplied)
<b>Handle Length:</b>	230mm	230mm	230mm	230mm	230mm	230mm
<b>Weight:</b>	2.1kg	2.5kg	2.6kg	3kg	2.6kg	3kg



## G - H Winch Cables

Model No. [SEE BELOW](#)

Model No:	Length:	Tension:	Applications:
<b>G</b> GWEC12	10m	540kg	GWE1200M, GWE1200B
<b>H</b> GWEC20	10m	900kg	GWE2000M, GWE2000B



## I - J Winch Straps

Model No. [SEE BELOW](#)

Model No:	Strap Length:	Tension:	Applications:
<b>I</b> GWES12	7m	540kg	GWE1200M, GWW1200M
<b>J</b> GWES20	10m	900kg	GWE2000M, GWW2000M



## K Anti-Slip Handling Gloves - Pair


Model No. [SSP33](#)

Spun nylon gloves with interlocking criss-cross coating. Ideal for handling cartons, glass and other items with a sheer finish. Conforms to BS EN 420:2003 + A1:2009. Conforms to BS EN 388:2016 Level 113XX.

## L - Q Manual Geared Winches with Brake

Model No. [SEE BELOW](#)

Hardened steel gear with a heavy plate chassis. Includes an automatic brake system which stops the winch when more than 25kg of force is applied. Features a fully enclosed gearbox. Suitable for general and recovery operations. Three options available; empty drum, with wire cable or with webbing strap, all in two capacities.

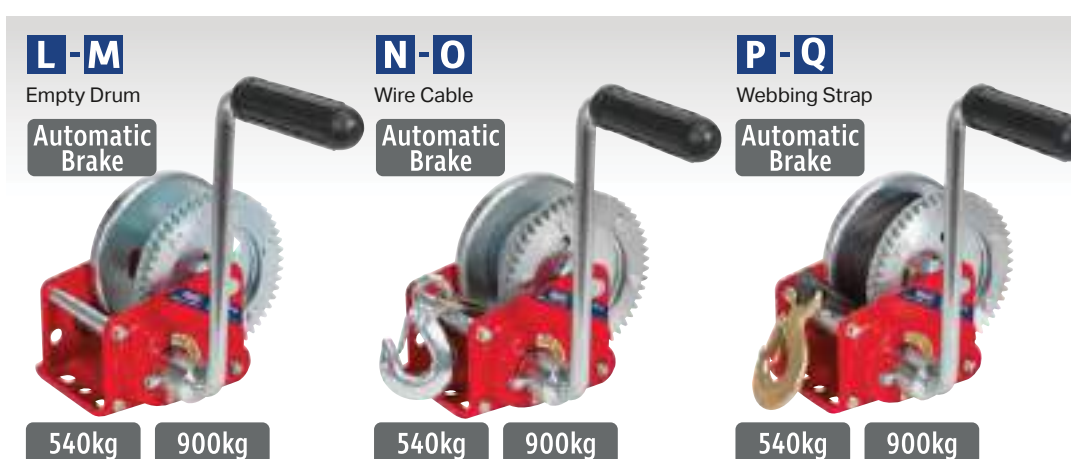

	<b>L</b>	<b>M</b>	<b>N</b>	<b>O</b>	<b>P</b>	<b>Q</b>
<b>Model No:</b>	<b>GWE1200B</b>	<b>GWE2000B</b>	<b>GWC1200B</b>	<b>GWC2000B</b>	<b>GWW1200B</b>	<b>GWW2000B</b>
<b>Capacity:</b>	540kg	900kg	540kg	900kg	540kg	900kg
<b>Gear Ratio:</b>	4.3:1	8.8:1	4.3:1	8.8:1	4.3:1	8.8:1
<b>Hub Diameter:</b>	Ø45mm	Ø63mm	Ø45mm	Ø63mm	Ø45mm	Ø63mm
<b>Maximum Cable/Webbing Size:</b>	Ø4mm x 10m (cable not included)	Ø6.35mm x 15m (cable not included)	Ø4mm x 10m (cable supplied)	Ø6.35mm x 15m (cable supplied)	50mm x 6m (webbing supplied)	50mm x 8m (webbing supplied)
<b>Handle Length:</b>	200mm	250mm	200mm	250mm	200mm	250mm
<b>Weight:</b>	2.9kg	5.8kg	3.7kg	8.6kg	3.7kg	6.4kg



## A - B ATV/Quad Recovery Winches

Model No. SEE BELOW

Suitable for ATV & quad bike mounting, these high speed winches offer a combination of performance with durability. Designed and built with the toughest jobs in mind. High power 12V DC motor with permanent magnet gives first class pulling power. Heavy-duty all-weather housing. 3-Stage planetary gears. Patented unique automatic spring brake, reliable in full load operation. Sliding ring gear clutch. High quality wire rope feeds through 4-way roller fairlead. IP67 rated motor and gearbox.

	A	B
Model No:	ATV1135	ATV2040
Voltage:	12V	12V
Line Pull*:	1135kg(2500lb)	2040kg(4500lb)
Motor Power:	1.8kW(2.34hp)	2.5kW(3.25hp)
Gear Ratio:	180:1	180:1
Line Speed*:		
No-Load:	4.8m/min	4.5m/min
Maximum Load:	1.6m/min	1.3m/min
Current Draw:		
No-Load:	26A	30A
Maximum Load:	150A	185A
Wire Rope Diameter:	Ø4.8mm	Ø5.4mm
Wire Rope Length:	14m	17m
Weight:	11.8kg	13.9kg
Replacement Wire Rope:	ATV1135.WR	ATV2040.WR
Dyneema Rope:	ATV1135.DR	ATV2040.DR

\*Performance quoted at first layer of rope on drum



## C 4-Pin Universal Winch Remote Control

Model No. UWRC01

Universal wireless remote control kit has a 4-pin plug-and-play receiver. With a range of up to 30m (dependant on environment), a wireless remote control is an essential accessory. Weatherproof receiver and handset making it ideal for off-roaders and recovery trucks, enabling the operator to stand well clear or sit in the cab (provided there are no restrictions).

Contents:	Handheld Control Unit (x1), 4-Pin Plug-and-Play Receiver Unit (x1)
Range:	30m
Battery:	MN21 23A (supplied)



## D Aluminium Hawse Fairleads

Model No. SEE BELOW

Machined from billet aluminium and for use in conjunction with Dyneema rope. Simply replaces the 4-way fairlead roller used with wire rope and helps protect and extend the life of the rope. Available in four sizes: 124, 152, 254, 280mm between mounting centres.

Model No:	Distance Between Mounting Centres:	Rope Aperture:	Overall Width:
AHF124	124mm	19.3 x 81mm	150mm
AHF152	152mm	19.3 x 110mm	178mm
AHF254	254mm	24 x 205mm	299mm
AHF280	280mm	24 x 205mm	325mm



## E Replacement Wire Rope

Model No. SEE SPEC TABLES

All winches are supplied as standard with wire rope. As this is a consumable part, replacement ropes are available (N.B. Hook not included). See winch specification chart for correct model number to suit your winch.



## F ATV/Quad Bike Self Recovery Kit

Model No. SRKIT01

Self recovery kit increases pulling capacity, changes pulling direction and is essential for getting the most out of an ATV/quad bike winch. Supplied in a black heavyweight nylon bag.

**Contents:** 2000kg Snatch Block (x1), 1400kg Galvanized 'D' Shackles (x2), 2500kg Tree/Post Slings 1.8m x 25mm (x2)

## G Off-Road Self Recovery Kit

Model No. SRKIT02

Self recovery kit increases pulling capacity, changes pulling direction and is essential for getting the most out of a recovery winch. Supplied in a black heavyweight nylon bag.

**Contents:** 10tonne Snatch Block (x1), 4.75tonne Galvanized 'D' Shackles (x2), 8tonne Tree/Post Slings 3.05m x 76mm (x2)



**A**

12V

4300kg

1900W


**Premier**
**B**

12V

5450kg

2000W


**Premier**

### A - B Self Recovery Winches

Model No. SEE BELOW

The self recovery winch range is designed and built with the toughest jobs in mind. There are two models ranging from 4300kg to 5450kg line pull. Both models have heavy-duty motors, 3-stage planetary gears using oversized components for greater torque, plus automatic 'in drum' brake. They feature weather sealed solenoids and ergonomic 'lift & turn' free spool clutches. Supplied with wire rope, latched hook and 4-way roller fairlead and plug-in handheld controller also included as standard. Suitable for off-road use on 4x4 vehicles and other vehicles where self recovery may be required. IP67 rated.


**C**

12V

5675kg

4700W


**Premier**
**D**

12V

8180kg

2300W


**Premier**

### C - D Industrial Recovery Winches

Model No. SEE BELOW

The industrial recovery winch range is designed and built for breakdown recovery and off-road use. Two models range from 5675kg to 8180kg line pull. Both have heavy-duty motors with 4-stage planetary gears using oversized components for greater torque, plus automatic 'in drum' brake. Both models have weather sealed solenoids and ergonomic 'lift & turn' free spool clutches. Units supplied with wire rope, latched hook, 4-way roller fairlead and plug-in handheld controller as standard. Ideal for flat bed pick up or other recovery trucks.

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>
Model No:	SRW4300	SRW5450	RW5675	RW8180
Current Draw:				
No-Load:	90A	90A	50A	95A
Maximum Load:	420A	460A	390A	420A
Gear Ratio:	196.6:1	196.6:1	171:1	516:1
Line Pull*:	4300kg(9500lb)	5450kg(12000lb)	5675kg(12500lb)	8180kg(18000lb)
Line Speed*:				
No-Load:	4.3m/min	4.3m/min	15m/min	3.5m/min
Maximum Load:	1.6m/min	0.6m/min	1m/min	0.8m/min
Motor Power:	1.9kW	2kW	4.7kW	2.3kW
Supply:	12V	12V	12V	12V
Wire Rope Length:	26m	26m	26m	25m
Wire Rope Diameter:	Ø9.2mm	Ø9.2mm	Ø9.2mm	Ø13mm
Weight:	40kg	40.5kg	41kg	69kg
Replacement Wire Rope:	SRW5450.WR	SRW5450.WR	RW5675.WR	RW8180.WR
Dyneema Rope:	SRW5450.DR	SRW5450.DR	n/a	n/a

\*Performance quoted at first layer of rope on drum





**A Tow Rope 2000kg Rolling Load Capacity**  
**Model No. TH2002**  
Heavy-duty non-elastic tow rope with a maximum rolling load of 2tonne. The rope is 4m in length and is fitted with easy fit metal clips.  
**Maximum Rolling Load Capacity:** 2tonne  
**Length:** 4m

**D Tow Pole 2000kg Rolling Load Capacity**  
**Model No. TPK252**  
2tonne Rolling load capacity tow pole. Steel sections clip together and fix with spring clips. Hooks feature sliding locking mechanism to prevent disengagement during towing/overrun.  
**Maximum Rolling Load Capacity:** 2tonne  
**Length:** 2m

**E Tow Pole with Shock Spring 2000kg Rolling Load Capacity**  
**Model No. TPK2522**  
2tonne Rolling load capacity tow pole with spring loaded damper unit. Locking tow hook attachment ensures secure attachment to vehicle. Suitable for mixed towing hook configurations, i.e. not both horizontal or vertical. Supplied in pouch.  
**Maximum Rolling Load Capacity:** 2tonne  
**Length:** 1.8m

**F Tow Pole 2500kg Rolling Load Capacity**  
**Model No. TPK253**  
2.5tonne Rolling load capacity rigid tow pole. Hook mechanism allows for mounting pole between vehicles where towing eyes may be mixed, i.e. not both horizontal or vertical.  
**Maximum Rolling Load Capacity:** 2.5tonne  
**Length:** 1.8m

**G Tow Pole 2500kg Rolling Load Capacity**  
**Model No. TPK353**  
2.5tonne Rolling load capacity rigid tow pole. Hook mechanism allows for mounting pole between vehicles where towing eyes may be mixed, i.e. not both horizontal or vertical.  
**Maximum Rolling Load Capacity:** 2.5tonne  
**Length:** 1.6m



**IMPORTANT**  
Tow ropes are designed to pull rolling loads only. Do not use for lifting or hoisting. Before use, check tow rope for signs of wear or damage and always consult the vehicle's manual for towing guidelines. Also ensure your insurance covers towing.



**B - C Tow Ropes**  
**Model No. SEE BELOW**

Elasticated webbing design helps prevent tow rope dragging on the ground during overrun. Ropes feature tough, heavy-duty stitched hook retaining sleeves. Exhaustively tested for compliance with HSE requirements.

<b>B Model No:</b>	<b>TH2502</b>
<b>Maximum Rolling Load Capacity:</b>	2tonne
<b>C Model No:</b>	<b>TH3002</b>
<b>Maximum Rolling Load Capacity:</b>	3tonne

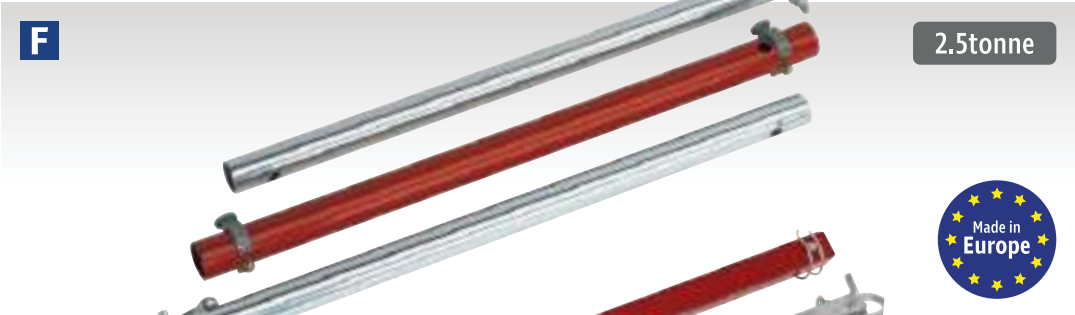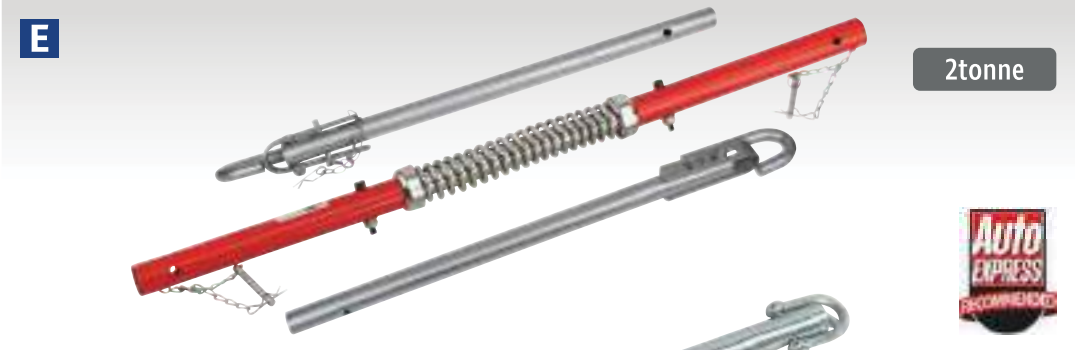



**A - D Hydraulic Platform Trucks**  
**Model No. SEE RIGHT**

Heavy-duty construction. All models fitted with four composite wheels, two fixed and two locking castors, for easy-rolling over rough workshop and warehouse floors. One-piece hydraulic unit controlled by large rear mounted foot pedal. Safety release mechanism positioned on handlebar for smooth controlled descent. All except Model No. HPT500 feature safety bars to prevent inadvertent lowering. Suitable for numerous garage, industrial and warehouse handling applications. Model No's HPT150 - HPT500 supplied with non-slip platform cover for added load security. May also be used as a mobile service bench.



**E Hydraulic Platform Truck High Lift**  
**400kg Capacity**  
**Model No. HPT400H**

Heavy-duty construction. High lift version with 1350mm maximum platform height. Fitted with four composite wheels, two fixed and two locking castors, for easy rolling over rough workshop and warehouse floors. One-piece hydraulic unit controlled by large rear mounted foot pedal. Safety release mechanism positioned on handlebar for smooth controlled descent. Suitable for numerous garage, industrial and warehouse handling applications. Supplied with non-slip platform cover for added load security. May also be used as a mobile service bench.

<b>Capacity:</b>	400kg
<b>Minimum Platform Height:</b>	360mm
<b>Maximum Platform Height:</b>	1350mm
<b>Platform Length:</b>	910mm
<b>Platform Width:</b>	500mm
<b>Wheel Diameter:</b>	Ø125mm



<b>Model No:</b>	<b>HPT150</b>	<b>HPT300</b>	<b>HPT500</b>	<b>HPT1000</b>
<b>Capacity:</b>	150kg	300kg	500kg	1000kg
<b>Minimum Platform Height:</b>	225mm	270mm	280mm	430mm
<b>Maximum Platform Height:</b>	700mm	770mm	860mm	1020mm
<b>Platform Length:</b>	705mm	820mm	815mm	1015mm
<b>Platform Width:</b>	450mm	520mm	500mm	510mm
<b>Wheel Diameter:</b>	Ø100mm	Ø125mm	Ø125mm	Ø150mm



**F Portable Access Ramp 450kg Capacity**  
**Model No. PAR01**

Lightweight, durable access ramp. Ideal for transporting goods up kerbs and steps. Fitted with two carry handles and rubber stoppers to prevent movement while in use. Features 600mm wide textured ramp surface providing additional grip.

<b>Capacity:</b>	450kg
<b>Dimensions (W x D x H):</b>	680 x 680 x 120mm



**A** 2200kg Capacity

Tandem loading rollers with sealed-for-life bearings all round.


**A 1150 x 525mm Pallet Truck - 2200kg Capacity**  
**Model No. PT2200**

Heavy-duty truck suitable for warehouse and general handling duties. Polyurethane, non-marking wheels and tandem loading rollers with sealed-for-life bearings all round. Robust and durable galvanized hydraulic unit with chromed ram and piston for resistance to corrosion. Features euro pallet depth indicators.

Capacity:	2200kg
Minimum Height:	85mm
Maximum Height:	200mm
Forks (Length x Overall Width):	1150 x 525mm
Fork Spread:	225mm



**B**



150kg Capacity

**B Set of 4 Corner Transport Dollies - 150kg Capacity**  
**Model No. CM4**

Heavy-duty corner dollies manufactured from high quality steel with a maximum load weight of 150kg. Ideal for moving awkward rectangular loads and provides increased mobility in locations where normal material handling equipment cannot be used. Each corner dolly is fitted with three free moving castor wheels for easy manoeuvrability and fitted with a rubber covered load area to help secure loads. Ideal for moving items such as cabinets, desks and much more. Sold in sets of four.

Capacity:	150kg
-----------	-------

**C**

**C Pallet Truck Stop**  
**Model No. PTS1**

Manufactured from non-slip durable rubber. Designed to secure pallet truck wheels to eliminate freight and vehicle damage due to unsecured pallet trucks while in transit. Ideal for delivery companies and other material handling applications.


Overall Size (W x D x H):	300 x 360 x 47mm
Weight:	1.74kg



**D**

1000kg Capacity

HIGH LIFT



**D 1170 x 540mm High Lift Pallet Truck - 1000kg Capacity**  
**Model No. PT1170H**


Heavy-duty high lift pallet truck suitable for the loading/unloading of light commercial vehicles as well as warehouse/general handling duties. Features twin stabilisers for extra balance when at maximum lift and an ergonomic handle design for comfortable operation.


Capacity:	1000kg
Minimum Height:	85mm
Maximum Height:	840mm
Forks (Length x Overall Width):	1170 x 540mm
Fork Spread:	225mm



**E**

2500kg Capacity





**E 1185 x 555mm Pallet Truck with Scales - 2500kg Capacity**  
**Model No. PT1150SC**

Heavy-duty pallet truck suitable for warehouse and general handling duties. Features built-in weighing scales with an accuracy of  $\pm 1$ kg. 6-Digit, high contrast LCD display. Control panel has a tare function to allow for packaging weight. Scales powered by 4 x AA batteries allowing up to 30 hours of use.

Capacity:	2500kg
Minimum Height:	90mm
Maximum Height:	205mm
Forks (Length x Overall Width):	1185 x 555mm
Fork Spread:	195mm
Display:	6-Digit LCD
Weighing Units:	Pounds, Kilograms
Battery:	4 x AA (not included)





**150kg Capacity**




Sold as singles.



Can be linked to create the required platform.

**A 150kg Interlocking Plastic Dolly**  
**Model No. CM150**

Interlocking plastic dollies can be linked lengthways or sideways to allow the user to create the platform they need to move large or heavy items around the workplace with ease. Each dolly can hold up to 150kg of evenly spread weight. Injection mould plastic features non-slip pads which prevent load from slipping. The design of the dolly also allows for these to be stacked safely on top of each other (maximum 10 high) when not in use. They also feature built-in carry handles to aid transportation and 75mm TPR double ball bearing castors for manoeuvrability.

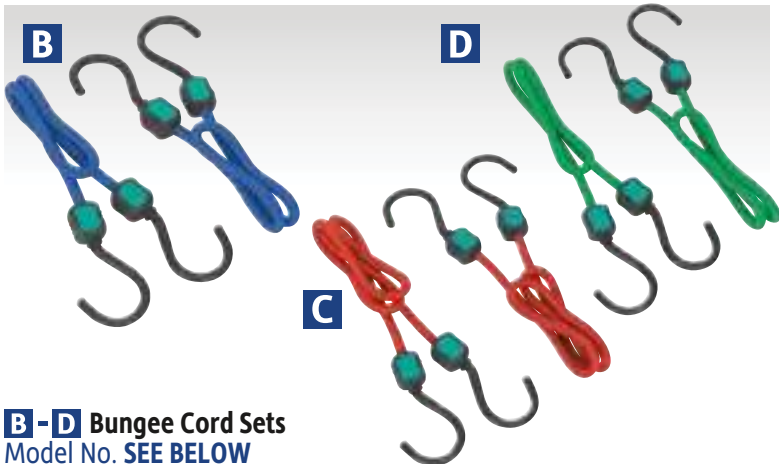

**B - D Bungee Cord Sets**  
**Model No. SEE BELOW**

Sets of two strong steel hooks with smooth nylon coating to prevent scratching. Heavy-duty polypropylene braid and high grade rubber cord providing maximum elasticity. Ideal for a wide range of applications including garages, workshops and trailers.

Model No:	Free Length:	Maximum Stretch:
<b>B BCS19</b>	460mm	1100mm
<b>C BCS21</b>	610mm	1350mm
<b>D BCS22</b>	760mm	1700mm



**G 1000mm Octopus Bungee Cord**  
**Model No. BCS23**

Fitted with eight nylon coated steel hooks to provide a strong hold and prevent scratching. Arms stretch out from centre ring to secure multiple points. Ideal for securing awkward items on trailers and roof racks while in transit.

<b>Free Length:</b>	1000mm
<b>Maximum Stretch:</b>	1800mm



See our full range of Bungee Cord Sets on page 1163.



**E 70kg Compact Folding Aluminium Sack Truck**  
**Model No. ST33**

Lightweight aluminium and composite construction, weighs just 3.8kg. Folds down for easy storage and transport, yet unfolds in seconds, carrying up to 70kg. Fitted with large, easy-rolling rubber wheels. Rubber grip handle for added comfort and control.

<b>Capacity:</b>	70kg
<b>Folded Size:</b>	720 x 480 x 65mm
<b>Unfolded Size:</b>	990 x 480 x 420mm
<b>Wheel Diameter:</b>	Ø175mm



**F 90kg Folding Sack Truck**  
**Model No. CST980**

Lightweight aluminium frame, weighs only 7kg yet has a carrying capacity of 90kg. Folding steel foot plate and telescopic handle with spring release means that trolley can be packed away in seconds. Large back support makes light work of oversized loads. Fitted with Ø150mm wheels for easy-rolling over rough ground. Ideal for business and home use.

<b>Capacity:</b>	90kg
<b>Height Folded:</b>	720mm
<b>Height Extended:</b>	1090mm
<b>Width:</b>	380mm
<b>Footplate Width:</b>	355mm
<b>Footplate Depth:</b>	240mm
<b>Wheel Diameter:</b>	Ø150mm

**A** 150kg Sack Truck with Solid Tyres  
Model No. **CST983**

Strong tubular steel construction with welded joints. Heavy-duty wheels feature steel inserts for added strength and durability. Can be rested on handles for flat loading. Fitted with rubber handgrips.

**B - F** Sack Trucks with Pneumatic Tyres  
Model No. **SEE BELOW**

Extra-strong tubular steel frame construction. Steel centred pneumatic wheels allow transport over the roughest terrain. Range includes case carrying models, CST988 and CST998, with 'P' handle, high back and flat loading capabilities. Model No's CST986, CST987, CST998 & CST999 include rubber handgrips.




	<b>A</b>	<b>B</b>	<b>C</b>
Model No:	<b>CST983</b>	<b>CST986</b>	<b>CST987</b>
Capacity:	150kg	200kg	200kg
Wheel Diameter:	Ø210mm	Ø250mm	Ø250mm
Wheel Thickness:	50mm	90mm	90mm
Height:	1170mm	1100mm	1190mm
Overall Width:	460mm	550mm	545mm
Platform Depth:	220mm	180mm	255mm

	<b>D</b>	<b>E</b>	<b>F</b>
Model No:	<b>CST988</b>	<b>CST999</b>	<b>CST998</b>
Capacity:	250kg	300kg	300kg
Wheel Diameter:	Ø250mm	Ø250mm	Ø250mm
Wheel Thickness:	90mm	90mm	90mm
Height:	1260mm	1300mm	1300mm
Overall Width:	560mm	500mm	550mm
Platform Depth:	220mm	280mm	230mm



CST988, CST998 & CST999 design enables flat loading.

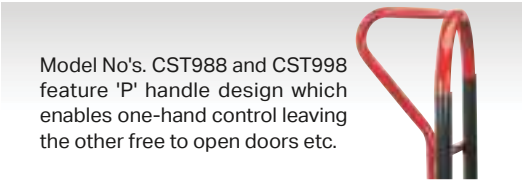

Model No's. CST988 and CST998 feature 'P' handle design which enables one-hand control leaving the other free to open doors etc.





**A** 200kg Folding Sack Truck with Pneumatic Tyres  
Model No. **CST801**

Extra-strong tubular steel framework with heavy-duty pneumatic tyres allow transport of load over rough terrain. Features foldaway toe plate and height adjustable handles. Fitted with composite grip handles for added comfort and stability.

<b>Capacity:</b>	200kg
<b>Wheel Diameter:</b>	Ø250mm
<b>Wheel Thickness:</b>	80mm
<b>Overall Width:</b>	480mm
<b>Platform Depth:</b>	290mm
<b>Handle Height Extended:</b>	1165mm
<b>Handle Height Non-Extended:</b>	810mm



**B** 150kg Folding Sack Truck with Pneumatic Tyres  
Model No. **CST800**

Manufactured from extra-strong tubular steel with heavy-duty pneumatic tyres allows transportation over rough terrain. Features foldaway toe plate providing increased loading area. Ideal for delivery drivers, farmers or builders.

<b>Capacity:</b>	150kg
<b>Wheel Diameter:</b>	Ø250mm
<b>Wheel Thickness:</b>	90mm
<b>Height:</b>	1140mm
<b>Overall Width:</b>	490mm
<b>Platform Depth</b>	90/420mm
<b>Standard/Extended:</b>	



**C** 250kg Folding Sack Truck with Pneumatic Tyres  
Model No. **CST990**

Extra-strong tubular steel frame construction. Galvanised Steel centred pneumatic wheels allow transport over the roughest terrain. Features extra foldaway toe plate for added extension when transporting larger loads. Ideal for delivery drivers, farmers or builders.

<b>Capacity:</b>	250kg
<b>Wheel Diameter:</b>	Ø250mm
<b>Wheel Thickness:</b>	90mm
<b>Height:</b>	1249mm
<b>Overall Width:</b>	650mm
<b>Platform Depth</b>	325/620mm
<b>Standard/Extended:</b>	



**D** 150kg Stair Climbing Sack Truck with Solid Tyres  
Model No. **CST985**

Tubular steel construction gives 150kg maximum load capacity. Deep foot ensures cartons stay on trolley during transit. Fitted with solid rubber wheels. Handle design allows a firm grip whilst ascending and descending stairways. Ideal for delivery drivers and couriers.

<b>Capacity:</b>	150kg
<b>Wheel Diameter:</b>	Ø165mm
<b>Wheel Thickness:</b>	30mm
<b>Height:</b>	1300mm
<b>Overall Width:</b>	510mm
<b>Platform Depth:</b>	230mm



**E** 250kg 3-in-1 Sack Truck with Pneumatic Tyres  
Model No. **CST989**

Tubular steel framework with heavy-duty pneumatic tyres allows transport of load over rough terrain. Suitable for use as a traditional sack truck or at 45° with support castors in position. For maximum load carrying capability use in horizontal position. Features fold out load restrainer for use when truck is in horizontal position. Adapts between configurations in seconds.

<b>Capacity:</b>	250kg
<b>Wheel Diameter:</b>	Ø250mm
<b>Wheel Thickness:</b>	90mm
<b>Height:</b>	1275mm
<b>Overall Width:</b>	600mm
<b>Platform Depth:</b>	300/620mm



**A**

**NEW**

**Premier**

200kg Capacity



PUNCTURE PROOF TYRE

**3 YEAR GUARANTEE\***



**B**

**NEW**

**Premier**

250kg Capacity



PUNCTURE PROOF TYRE

**3 YEAR GUARANTEE\***



**C**

**NEW**

**Premier**

250kg Capacity



PUNCTURE PROOF TYRE

**3 YEAR GUARANTEE\***



**A - C Heavy-Duty Sack Trucks with PU Tyres**  
**Model No. SEE BELOW**

Heavy-duty tubular steel construction with welded joints with an extra 50kg capacity to the standard models. Puncture proof heavy-duty PU tyres with powder coated steel hubs and fitted with knuckle protecting D-shaped handle grips. 3 Year guarantee.

	<b>A</b>	<b>B</b>	<b>C</b>
Model No:	CST983HD	CST986HD	CST987HD
Capacity:	200kg	250kg	250kg
Wheel Size:	Ø210mm	Ø250mm	Ø250mm
Wheel Width:	55mm	85mm	85mm
Wheel Bore Size:	Ø16mm	Ø16mm	Ø16mm
Height:	1150mm	1150mm	1220mm
Overall Width:	470mm	525mm	540mm
Platform Depth:	220mm	180mm	250mm



**Puncture Proof Tyres**  
Filled with hard wearing PU (Polyurethane) these tyres provide the best features of both maintenance-free solid wheels and the smooth, shock absorbing properties of rubber wheels.

**D**

**NEW**

**Premier**

300kg Capacity

Foldaway Toe Plate



PUNCTURE PROOF TYRE

**3 YEAR GUARANTEE\***





**D 300kg Capacity Heavy-Duty 3-in-1 Sack Truck with PU Tyres**  
**Model No. CST989HD**

Heavy-duty tubular steel construction with welded joints with 300kg capacity. Puncture proof heavy-duty PU tyres with powder coated steel hubs. Features foldaway toe plate for added extension when transporting larger loads. Can be used as a traditional sack truck, horizontal or at a 45° angle with support castors. 3 Year guarantee.

Capacity:	300kg
Wheel Size:	Ø250mm
Wheel Width:	85mm
Wheel Bore Size:	Ø20mm
Height:	1220mm
Overall Width:	600mm
Platform Depth:	Fixed; 300mm, Folding; 600mm

**E**

**NEW**

**Premier**

300kg Capacity

Foldaway Toe Plate



PUNCTURE PROOF TYRE

**3 YEAR GUARANTEE\***





**E 300kg Capacity Heavy-Duty Sack Truck with PU Tyres**  
**Model No. CST990HD**

Heavy-duty tubular steel construction with welded joints with 300kg capacity. Puncture proof heavy-duty PU tyres with powder coated steel hubs. Features foldaway toe plate for added extension when transporting larger loads. 3 Year guarantee.

Capacity:	300kg
Wheel Size:	Ø250mm
Wheel Width:	85mm
Wheel Bore Size:	Ø20mm
Height:	1220mm
Overall Width:	580mm
Platform Depth:	Fixed; 300mm, Folding; 600mm

 SealeyTools

 @sealeytools

 Sealey Tools

 @sealeytools

 Sealey Tools

 @sealeytools





**A** 70kg Foldable Canvas Trolley  
Model No. **CST802**

Medium duty tubular steel frame with red canvas material. Collapsible frame for easy storage. Suitable for a wide variety of warehouse, office, garden and domestic hauling applications. Maximum capacity of 70kg. Folded Dimensions (L x W x H): 800 x 535 x 200mm.

<b>Capacity:</b>	70kg
<b>Wheel Size:</b>	Ø203x44mm
<b>Platform Height:</b>	280mm, Height to Top of Canvas: 535mm
<b>Platform Length:</b>	900mm
<b>Platform Width:</b>	535mm
<b>Overall Height:</b>	1180mm (inc. handle)



**D** Platform Truck with Removable Sides  
Model No. **CST773**

Welded construction with 15mm wood composite platform and four removable wire mesh panels. Two fixed wheels and two braked castors for easy manoeuvring and safe loading/unloading. Ideal for warehouse and industrial applications.

<b>Capacity:</b>	300kg
<b>Wheel Size:</b>	Ø200 x 50mm
<b>Platform Size (W x D):</b>	1200 x 800mm
<b>Platform Height:</b>	280mm
<b>Side Height:</b>	590mm
<b>Overall Width:</b>	800mm
<b>Overall Length:</b>	1420mm
<b>Overall Height:</b>	1150mm



**B** Platform Truck with Folding/Removable Sides  
Model No. **CST997**

Heavy-duty steel with hinged mesh construction. Cushioned grip pull handle with smooth steering action for easy manoeuvrability. Steel centred pneumatic wheels allow transport over the toughest terrain. Drop-down sides, for easy loading, are also removable, allowing use as a flatbed for oversized items. Suitable for a variety of warehouse, office, garden and domestic hauling applications.

<b>Capacity:</b>	200kg
<b>Wheel Size:</b>	Ø250 x 90mm
<b>Platform Height:</b>	350mm
<b>Cart Size (Internal):</b>	
<b>Length:</b>	930mm
<b>Width:</b>	480mm
<b>Depth:</b>	220mm
<b>Overall Height:</b>	570mm



**E - F** Folding Platform Trucks  
Model No. **SEE BELOW**

Rigid platform trucks feature rubberised deck and bumper strip. Handles fold flat for ease of storage. Suitable for a variety of warehouse, office and domestic applications.

	<b>E</b>	<b>F</b>
<b>Model No:</b>	<b>CST991</b>	<b>CST992</b>
<b>Capacity:</b>	150kg	300kg
<b>Wheel Diameter:</b>	Ø100mm	Ø125mm
<b>Platform (W x D):</b>	465 x 725mm	605 x 910mm
<b>Platform Height:</b>	140mm	185mm
<b>Overall Height:</b>	815mm	870mm



**C** Platform Truck with Folding/Removable Sides  
Model No. **CST806**

Heavy-duty rust resistant steel construction. Smooth steering action for easy manoeuvrability, with soft rubber gripped handle and pneumatic wheels for easy transportation over the toughest terrain. All four sides drop down using locking pin function for easy loading. Can also be used as a flatbed for transporting oversized items. Fitted with additional removable storage tray for carrying smaller items. Suitable for a variety of warehouse, office, garden and domestic applications.

<b>Capacity:</b>	450kg
<b>Wheel Size:</b>	Ø300 x 90mm
<b>Platform Height:</b>	390mm
<b>Cart Size (Internal):</b>	
<b>Length:</b>	1120mm
<b>Width:</b>	560mm
<b>Depth:</b>	300mm
<b>Overall Height:</b>	650mm



**G** 250kg Platform Truck  
Model No. **CST993**

Rigid platform truck featuring heavy-duty wooden deck and tubular steel bumper. Fitted with a fully detachable handle for ease of storage. Suitable for a variety of warehouse, office and domestic applications.

<b>Capacity:</b>	250kg
<b>Wheel Diameter:</b>	Ø125mm
<b>Platform (W x D):</b>	495 x 950mm
<b>Platform Height:</b>	225mm
<b>Overall Height:</b>	960mm




**A Tarpaulins**  
**Model No. SEE RIGHT**

Manufactured from 130g/m<sup>2</sup> polyethylene with heavy, 30micron laminate. Tear-proof, waterproof and treated with a UV filter to prolong life and durability. Mould and mildew proofed. Constructed with roped edges and metal grommets in all corners and every metre. Top quality tarpaulins available in blue or green are suitable for farm, garden, bodyshop, garage, boat yard and leisure use.

BLUE	GREEN	
Model No:	Model No:	Size:
TARP68	TARP68G	1.73 x 2.31m
TARP810	TARP810G	2.44 x 3.05m
TARP1012	TARP1012G	3.05 x 3.66m
TARP1216	TARP1216G	3.66 x 4.88m
TARP1620	TARP1620G	4.88 x 6.10m
TARP1824	TARP1824G	5.49 x 7.32m
TARP2040	TARP2040G	6.10 x 12.19m

Note: Nominal sizes

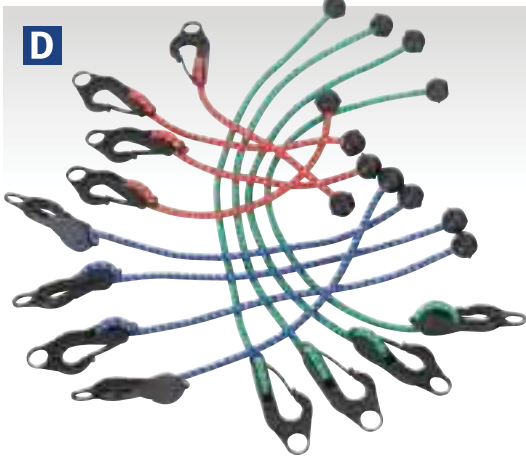

**D 12pc Assorted Tarpaulin Cord Set**  
**Model No. TARP12**

Adjustable composite hooks with ball-ended bungee cords. The cord is detached from the hook, fed through the tarpaulin rope eye and then reattached at the required length. Three different length cords are supplied, with a maximum safe stretch up to 1050mm and safe load up to 20kg.

Contents:	310mm (x4), 440mm (x4), 600mm (x4)
Free Length:	Maximum Stretch:
310mm	550mm
440mm	800mm
600mm	1050mm



**B 2pc Tarpaulin Clip Set**  
**Model No. TARP/2**

Rugged composite clip with heavy-duty spring and bungee cord. Ingenious design grips tarps and sheeting tight without the need to locate rope eyes. The tighter the clip is pulled the tighter it grips. Simple to release. Suitable for use on trucks, trailers, farm, garden and garage applications.



**C 4pc Tarpaulin Clip Set**  
**Model No. TARP4**

Composite clip set with heavy-duty spring. Simple to use with tension adjusting control to enable a firm grip of tarpaulins and sheeting without the need to use rope eyes. Suitable for use on trucks, trailers, farm, garden and garage applications.



**E Polypropylene Rope**  
**Model No. SEE BELOW**

Multipurpose heavy-duty weather resistant polypropylene rope. Available in 8 or 10mm diameter and 220m lengths.

Model No:	Diameter:	Length:
RC08220	Ø8mm	220m
RC10220	Ø10mm	220m



**F 6pc Ratchet Tie Down & Flat Bungee Cord Set**  
**Model No. TD285SBD**

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flat-beds or trailers and for general load restraint. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint. Also includes two 760mm flat bungee cords and two 460mm flat bungee cords.

Contents:	Tie Downs (x2), Bungee Cords (x4)
Maximum Tension:	400kg
Load Test:	800kg
Webbing Width:	25mm
Webbing Length:	5m
Hook:	S-Type






**A - D Flat Bungee Cord Sets**  
**Model No. SEE BELOW**

Sets of two extra-strong bungee cords ideal for multiple applications including garage, workshop, trailer and domestic use. Heavy-duty steel hooks with nylon coating, polypropylene braid with high grade rubber cord giving maximum elasticity. Up to three times stronger than traditional bungee cords.


Model No:	Free Length:	Maximum Stretch:
<b>A BCS15</b>	460mm	1040mm
<b>B BCS16</b>	610mm	1300mm
<b>C BCS17</b>	760mm	2000mm
<b>D BCS18</b>	910mm	2200mm

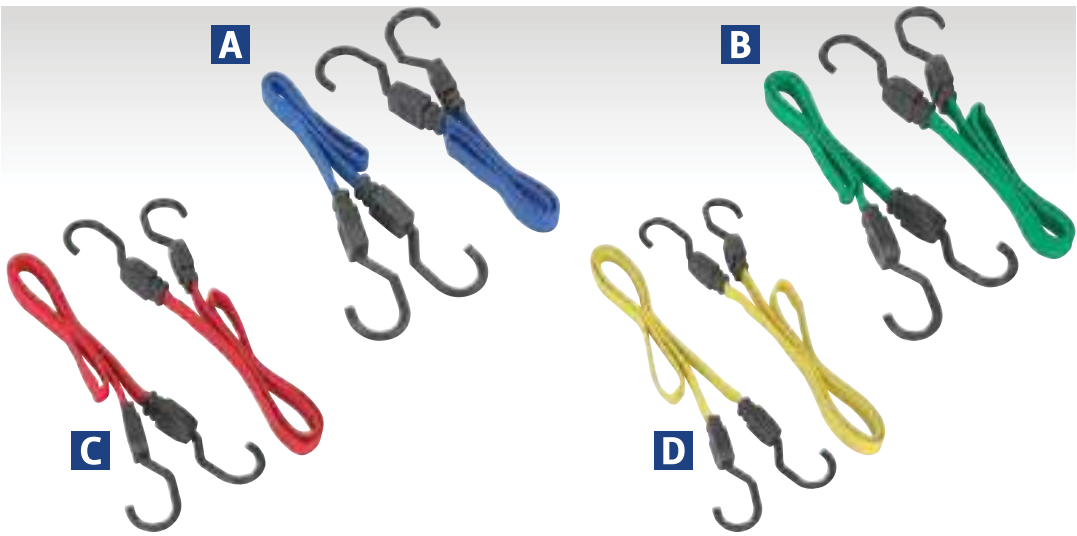

**E - G Bungee Cord Sets**  
**Model No. SEE BELOW**

Sets of two strong steel hooks with smooth nylon coating to prevent scratching. Heavy-duty polypropylene braid and high grade rubber cord providing maximum elasticity. Ideal for a wide range of applications including garages, workshops and trailers.

Model No:	Free Length:	Maximum Stretch:
<b>E BCS19</b>	460mm	1100mm
<b>F BCS21</b>	610mm	1350mm
<b>G BCS22</b>	760mm	1700mm

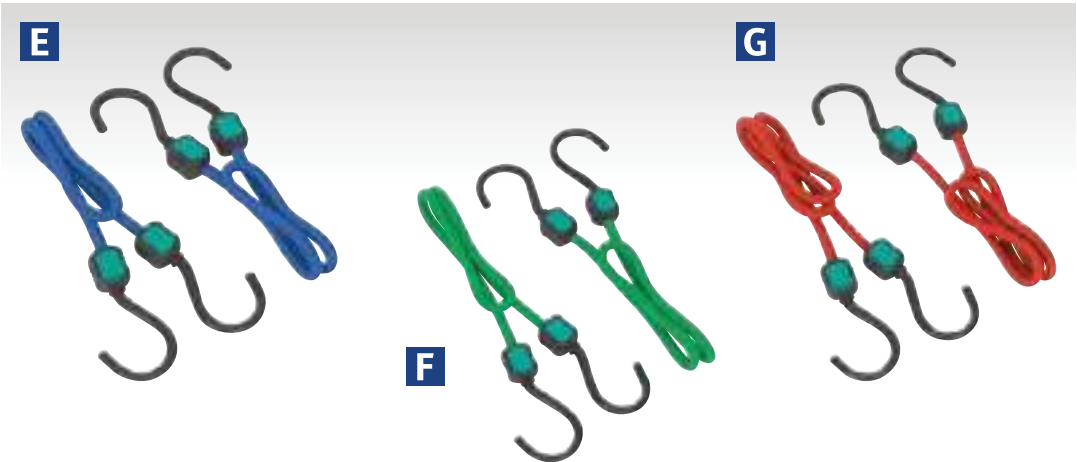

**H - I Elastic Cord Sets**  
**Model No. SEE BELOW**

Elastic cords make tying items down quick and easy. Can be used in the workshop, garage, car, trailer and caravan. Not suitable for supporting loads. Packaged in a round plastic tube.

Model No:	BCS10	BCS20
<b>Contents:</b>	Ø8 x 250 (x4), Ø8 x 600 (x2), Ø8 x 800 (x2), Ø8 x 1000mm (x2)	Ø8 x 250 (x4), Ø8 x 400 (x4), Ø8 x 500 (x4), Ø8 x 600 (x4), Ø8 x 750mm (x4)

**J 1000mm Octopus Bungee Cord**  
**Model No. BCS23**

Fitted with eight nylon coated steel hooks to provide a strong hold and prevent scratching. Arms stretch out from centre ring to secure multiple points. Ideal for securing awkward items on trailers and roof racks while in transit.


<b>Free Length:</b>	1000mm
<b>Maximum Stretch:</b>	1800mm



**A - B Auto Retractable Ratchet Tie Downs**  
Model No. [SEE BELOW](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Auto-rewind at a push of a button retracts the webbing, leaving the unit neat and tidy. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint. Suitable for securing of loads and tarpaulins onto flatbeds or trailers. Handles and release mechanism are rubber coated for added comfort.

	<b>A</b>	<b>B</b>
Model No:	ATD25301	ATD50301
Quantity:	1	1
Maximum Tension:	300kg	750kg
Load Test:	600kg	1500kg
Webbing Width:	25mm	50mm
Webbing Length:	3m	3m
Hook:	S-Type	S-Type

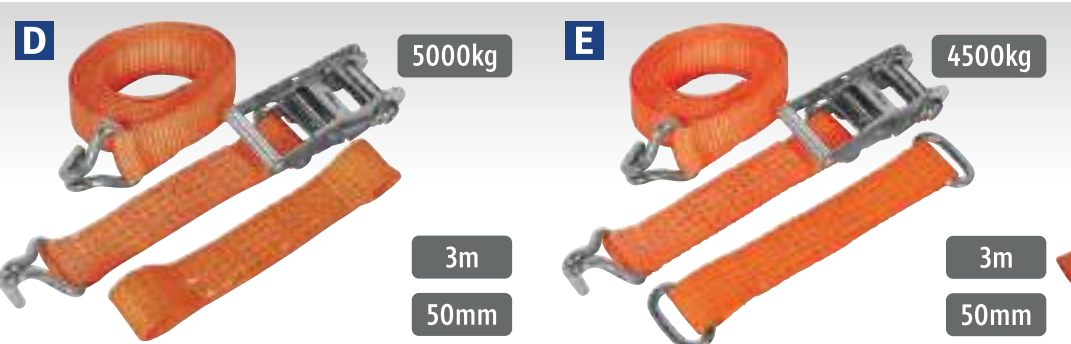

**D - E Car Transporter Ratchet Tie Downs**  
Model No. [SEE BELOW](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing cars on transporters using wheel strap, which slides on to the main tie down. Model No. TDRWA features soft wheel choker for use on alloy wheels. A double-locking, short narrow handle ratchet ensures there is no risk of disengagement or tension loss until the handle is released.

	<b>D</b>	<b>E</b>
Model No:	TDRWA	TDRWS
Quantity:	1	1
Maximum Tension:	2500kg	2250kg
Load Test:	5000kg	4500kg
Webbing Width:	50mm	50mm
Webbing Length:	3m	3m
Cross Strap Length:	320mm	320mm
Wheel Type:	Alloy	Steel
Hook:	J-Type	J-Type

**IMPORTANT**


The specification table indicates two load specifications. The maximum tension is that which is developed by the ratchet mechanism. The load test is the capacity of the webbing to resist shock loads.



**C Slide Ratchet Tie Down**  
Model No. [TD1202SR](#)

Manufactured from polyester webbing with stitched reinforcement around hooks and all fixing points. Suitable for securing weighty loads and tarpaulins onto trailers. Ratchet mechanically tensions the webbing using a simple drum and ratchet mechanism providing superior load restraint. Sliding feature allows mechanism to be located at any point along run of webbing, resulting in reduced load damage and ease of operation. Hook-and-loop strap to tidy away excess webbing for improved safety.

Maximum Tension:	600kg
Load Test:	1200kg
Webbing Width:	32mm
Webbing Length:	3m
Hook:	S-Type
Quantity:	2

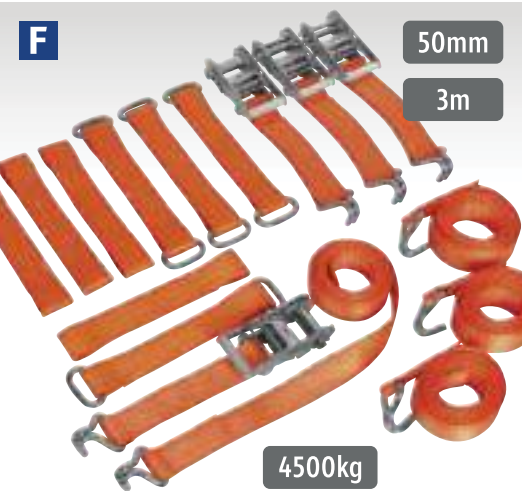

**F 4pc Car Transporter Ratchet Tie Down Kit**  
Model No. [TDRWKIT](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing cars on transporters using wheel strap, which slides on to the main tie down. Includes four ratchet tie downs, four soft wheel chokers for use on alloy wheels and four wheel chokers with 'O' rings for use on steel wheels. A double-locking, short narrow handle ratchet ensures there is no risk of disengagement or tension loss until the handle is released.

Maximum Tension:	2250kg
Load Test:	4500kg
Webbing Width:	50mm
Webbing Length:	3m
Cross Strap Length	320mm
Wheel Type:	Alloy or Steel
Hook:	J-Type







**A - B Self-Securing Ratchet Tie Downs**  
Model No. [SEE BELOW](#)

Manufactured from polyester webbing. These straps are ideal for securing and binding oversized and difficult loads together. Feed webbing around load and back through ratchet mechanism to ensure load is secure. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint.

	<b>A</b>	<b>B</b>
<b>Model No:</b>	TD05045E	TD08045E
<b>Quantity:</b>	2	2
<b>Maximum Tension:</b>	250kg	400kg
<b>Load Test:</b>	500kg	800kg
<b>Webbing Width:</b>	25mm	25mm
<b>Webbing Length:</b>	4.5m	4.5m



**E - F Polyester Webbing Ratchet Tie Downs with S-Hooks**  
Model No. [SEE BELOW](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flatbeds or trailers and for general load restraint. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint.

	<b>E</b>	<b>F</b>
<b>Model No:</b>	TD284SD	TD484SD
<b>Qty:</b>	2	4
<b>Maximum Tension:</b>	400kg	400kg
<b>Load Test:</b>	800kg	800kg
<b>Webbing Width:</b>	25mm	25mm
<b>Webbing Length:</b>	4m	4m
<b>Hook:</b>	S-Type	S-Type



**C - D Polyester Webbing Ratchet Tie Downs with S-Hooks**  
Model No. [SEE RIGHT](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flatbeds or trailers and for general load restraint. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint.


	<b>C</b>	<b>D</b>
<b>Model No:</b>	TD0540S2	TD0540S4
<b>Quantity:</b>	2	4
<b>Maximum Tension:</b>	250kg	250kg
<b>Load Test:</b>	500kg	500kg
<b>Webbing Width:</b>	25mm	25mm
<b>Webbing Length:</b>	4m	4m
<b>Hook:</b>	S-Type	S-Type



**G - J Polyester Webbing Cam Buckle Tie Downs with S-Hooks**  
Model No. [SEE BELOW](#)

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flatbeds or trailers and for general load restraint. Simple cam buckle fastener tensions the webbing to provide superior load restraint.

	<b>G</b>	<b>H</b>	<b>I</b>	<b>J</b>
<b>Model No:</b>	TD2525CS	TD2550CS	TD05025CS	TD05050CS
<b>Qty:</b>	2	2	2	2
<b>Maximum Tension:</b>	125kg	125kg	250kg	250kg
<b>Load Test:</b>	250kg	250kg	500kg	500kg
<b>Webbing Width:</b>	25mm	25mm	25mm	25mm
<b>Webbing Length:</b>	2.5m	5m	2.5m	5m
<b>Hook :</b>	S-Type	S-Type	S-Type	S-Type

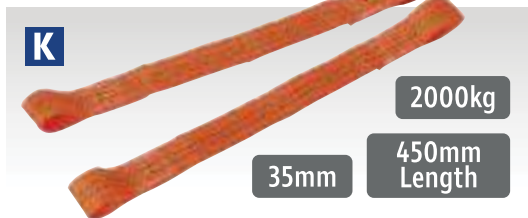

**K Tie Down Securing Loop - Pair**  
Model No. [TDL01](#)

Manufactured from polyester webbing. Use to either loop or create a slip knot at any appropriate point of the load and then attach to the hook of the strap. Suitable for use on motorcycles or offset loads to help prevent scratches to paint finishes and chrome.

<b>Maximum Tension:</b>	1000kg
<b>Load Test:</b>	2000kg
<b>Webbing Width:</b>	35mm
<b>Webbing Length:</b>	450mm



A - Q Ratchet Tie Downs  
Model No. SEE BELOW

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flat-beds or trailers and for general load restraint. Tie downs rely on the operator tensioning the webbing with body weight. Ratchet mechanically tensions the webbing using a simple drum and ratchet mechanism providing superior load restraint.

	A	B
Model No:	TD0845S	TD0845J
Quantity:	1	1
Maximum Tension:	400kg	400kg
Load Test:	800kg	800kg
Webbing Width:	25mm	25mm
Webbing Length:	4.5m	4.5m
Hook:	S-Type	J-Type



	C	D	E	F	G	H	I	J	K
Model No:	TD1506J	TD1508J	TD1510J	TD2006J	TD2008J	TD2010J	TD3006J	TD3008J	TD3010J
Quantity:	1	1	1	1	1	1	1	1	1
Maximum Tension:	750kg	750kg	750kg	1000kg	1000kg	1000kg	1500kg	1500kg	1500kg
Load Test:	1500kg	1500kg	1500kg	2000kg	2000kg	2000kg	3000kg	3000kg	3000kg
Webbing Width:	25mm	25mm	25mm	35mm	35mm	35mm	50mm	50mm	50mm
Webbing Length:	6m	8m	10m	6m	8m	10m	6m	8m	10m
Hook:	J-Type	J-Type	J-Type	J-Type	J-Type	J-Type	J-Type	J-Type	J-Type



**R** 32mm x 4.9m  
Polyester Webbing Ratchet Tie Down with  
J Hooks 1200kg Load Test - 2 Pairs  
Model No. TD41248JD

Manufactured from polyester webbing with stitched reinforcement around hooks. Suitable for securing loads and tarpaulins onto flatbeds or trailers and for general load restraint. Simple drum and ratchet mechanism tensions the webbing to provide superior load restraint.

	L	M	N	O	P	Q
Model No:	TD5006J	TD5008J	TD5010J	TD10008J	TD10010J	TD10012J
Quantity:	1	1	1	1	1	1
Maximum Tension:	2500kg	2500kg	2500kg	5000kg	5000kg	5000kg
Load Test:	5000kg	5000kg	5000kg	10000kg	10000kg	10000kg
Webbing Width:	50mm	50mm	50mm	75mm	75mm	75mm
Webbing Length:	6m	8m	10m	8m	10m	12m
Hook:	J-Type	J-Type	J-Type	J-Type	J-Type	J-Type

Quantity:	4
Maximum Tension:	600kg
Load Test:	1200kg
Webbing Width:	32mm
Webbing Length:	4.9m
Hook:	J-Type





**IMPORTANT:** These ramps are designed for levelling only. Do not work under vehicle whilst it is being supported by these ramps.

**A Levelling Ramps 2tonne Capacity per Ramp 4tonne Capacity per Pair**  
**Model No. WL101**

Ideal for campervans, caravans and motorhomes (capacity 4 tonne per pair). Not to be used as a vehicle lifting ramp for the purpose of working underneath the vehicle. Suitable for both single and tandem axle vehicles. Raise height of one or both wheels to level out vehicle while reducing the possibility of any movement, when used in conjunction with Model No. WLC01. Durable and easy to clean UV resistant high-density polyethylene with a non-slip surface. Interlocking system allows two ramps to be used together to make one levelling ramp with increased height. Designed to interlock with Model No. WLC01 to securely chock vehicle in place once it is level.



**IMPORTANT:** These ramps are designed for levelling only. Do not work under vehicle whilst it is being supported by these ramps.


**C 3-Stage Levelling Ramps - 2.5tonne Capacity per Ramp**  
**5tonne Capacity per Pair**  
**Model No. WL301**

Ideal for campervans and caravans (capacity 5tonne per pair). Suitable for single axle vehicles only. Raise wheels to various heights using different points on each ramp, to level vehicle out. Anti roll-off step at end of ramp. Durable and easy to clean UV resistant high-density polyethylene with a non-slip surface. Designed to interlock with Model No. WLC01 to securely chock vehicle in place once it is level.

**E - F Car Boot Organizers**  
**Model No. SEE BELOW**

Tough and durable polyester construction. Ideal for storage in cars, 4x4s and SUVs. Features two large compartments, plus additional pockets. Fitted with two carry handles and folds flat for easy storage. Model No. CBO2 features hook-and-loop strips on base to prevent unit from moving while in transit.

Model No:	Size (W x D x H):	Outer Pockets:	Inner Compartments:
<b>E CBO1</b>	590 x 350 x 300mm	2	2
<b>F CBO2</b>	600 x 360 x 310mm	10	2

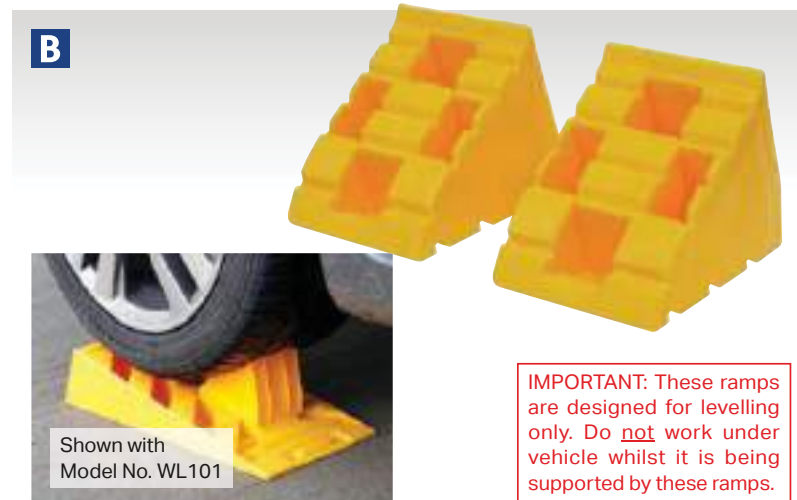

**IMPORTANT:** These ramps are designed for levelling only. Do not work under vehicle whilst it is being supported by these ramps.

**B Levelling Ramp Chocks - Pair**  
**Model No. WLC01**

Chocks for fixing vehicle position on interlocking levelling ramps (not designed to be used independently as chocks). Durable and easy to clean UV resistant high-density polyethylene with a non-slip surface. Different interlocking tread patterns on two of the faces allow secure positioning of chock on Model No's WL301 & WL101 as well as other brands of levelling ramps, for maximum stability.




**IMPORTANT:** These ramps are designed for levelling only. Do not work under vehicle whilst it is being supported by these ramps.

**D Tyre Savers - 2.5tonne Capacity per Ramp 5tonne Capacity per Pair**  
**Model No. TS05**

Tyre saving blocks help prevent flat spots or damage to car, caravan or motorhome tyres whilst they are stationary for prolonged periods of time, such as over winter. Maximum weight capacity 5tonne per pair. Saves installing winter storage wheels. Increased stability, as wheels cannot easily be moved in either direction without deliberate intent to do so.



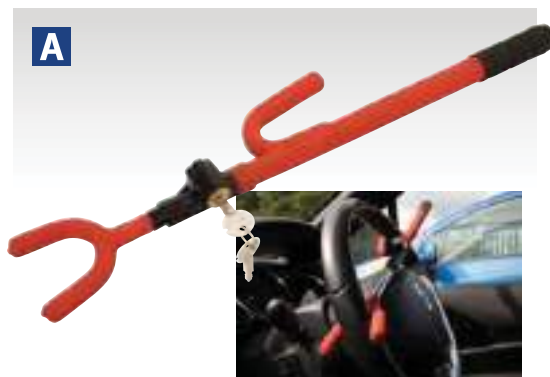

**A Steering Wheel Lock**  
Model No. PB393

Hardened steel lock that is quick and easy to fit to steering wheel. Highly visible deterrent to the vehicle thief. Vinyl coating protects steering wheel from damage. Supplied with two keys.

**Wheel Internal Diameter Range:** Ø180-365mm



**B Claw Car Wheel Clamp with Lock & Key**  
Model No. PB395

Claw locks around wheel rim and tyre. Simple and quick ratchet action makes fitting easy. Fully lockable. No need to touch wheel or tyre when installing or removing so hands remain clean. Plastic sleeved claws will not damage alloys. Finished in yellow and red for high visibility.

**Minimum Clamp Diameter:** Ø180mm

**Maximum Clamp Diameter:** Ø270mm

**Throat:** 190mm



**C Wheel Clamp with Lock & Key**  
Model No. PB396

Triple arms lock around tyre. Simple and quick sliding action makes fitting easy. Fully lockable and supplied with two keys. Finished in yellow for high visibility.

**Minimum Clamp Diameter:** Ø540mm

**Maximum Clamp Diameter:** Ø740mm

**Maximum Tyre Width:** 220mm



**D Wheel Clamp with Lock & Key**  
Model No. PB397

Manufactured from quality steel with zinc plating for corrosion resistance. Simple and quick ratchet action makes protection easy. Fully lockable and supplied with two keys. Ideal for forecourt use. Finished in yellow for high visibility.

**Minimum Clamp Diameter:** Ø450mm

**Maximum Clamp Diameter:** Ø640mm

**Maximum Tyre Width:** 225mm



**E 3-Legged Parking Barrier**  
Model No. PB296

Parking barrier manufactured from Ø35mm tube steel. Supplied with padlock and two keys. All parts galvanized or zinc plated for corrosion resistance. For full security, we suggest you drill out the screw head after installation.

**Minimum Height:** 50mm

**Maximum Height:** 440mm

**Width:** 690mm



**F No Parking Barrier**  
Model No. PB391

Heavy-duty tubular steel construction barrier. Fitted with locking pin feature to secure sign in upright position. Supplied with three securing bolts and two keys. For full security, we suggest you drill out the screw head after installation.

**Minimum Height:** 40mm

**Maximum Height:** 440mm



**G 3-Legged Parking Barrier with Integral Lock**  
Model No. PB298


Heavy-duty parking barrier manufactured from Ø50mm tube steel. Supplied with integral lock and two keys. Powder coat finish for corrosion resistance. For full security, we suggest you drill out the screw head after installation.

**Minimum Height:** 60mm

**Maximum Height:** 650mm

**Width:** 980mm



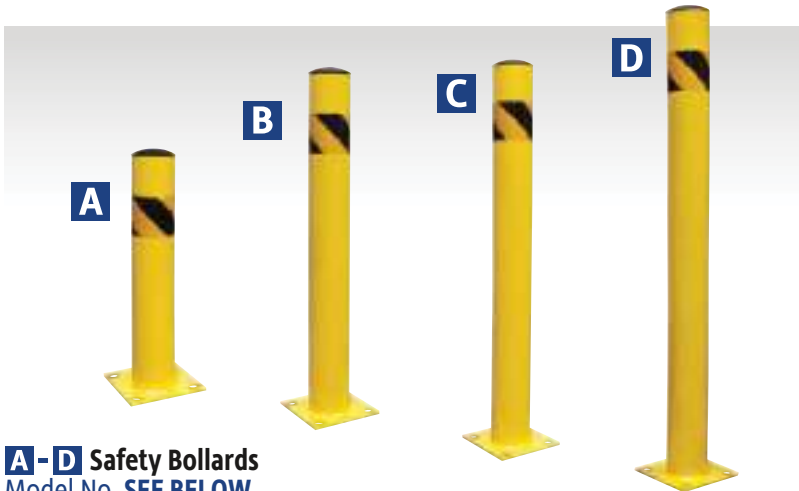

**A - D Safety Bollards**  
Model No. SEE BELOW

Constructed from heavy-duty Ø110mm steel pipe. Plastic cap can be removed and the pipe filled with cement for greater impact resistance. 200mm Square base plate has four pre-drilled Ø22mm holes for fixing to floor (fixings not included). Can be installed as a removable bollard with a secure locking collar (requires Model No. RBLP and a padlock such as Model No. PL402L).

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>
<b>Model No:</b>	<b>BOL600</b>	<b>BOL900</b>	<b>BOL1050</b>	<b>BOL1200</b>
<b>Height:</b>	600mm	900mm	1050mm	1200mm
<b>Weight:</b>	4.46kg	5.86kg	6.06kg	6.60kg



**E 900mm Folding Bollard with Lock**  
Model No. FBOL900

Constructed from heavy-duty Ø114mm steel pipe. Features integral lock. Sturdy 200 x 220mm base plate with four pre-drilled Ø13.5mm holes for fixing to floor (fixings not supplied).


<b>Minimum/Maximum Height:</b>	130/900mm
<b>Weight:</b>	10.76kg



**F - H Heavy-Duty Machine Guards**  
Model No. SEE BELOW

Constructed from heavy-duty Ø114mm steel pipe. Ideal for protecting vulnerable structures or machinery from industrial vehicles. Bases have four pre-drilled Ø22mm holes for fixing to floor (fixings not supplied) in 200mm square mounting plate. Powder coated yellow with hazard black and yellow band at either end for high visibility.

	<b>F</b>	<b>G</b>	<b>H</b>
<b>Model No:</b>	<b>MG600</b>	<b>MG900</b>	<b>MG1050</b>
<b>Height:</b>	600mm	900mm	1050mm
<b>Weight:</b>	17.32kg	25.0kg	29.0kg

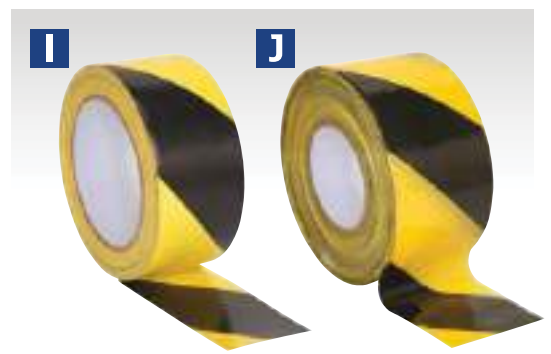

**I - J Hazard Warning Barrier Tapes**  
Model No. SEE BELOW


Model No:	Description:	Size:
<b>I HWTBY</b>	PVC Film with Adhesive Back	50mm x 33m
<b>J BTBY</b>	Non-Adhesive PE Film	80mm x 100m



**K 2500mm Plastic Folding Barrier**  
Model No. PFB2500

Temporary expanding barriers unfold from 230mm to 2.5m long fully extended. 380mm Wide legs at either end, which can both be filled with water via 20mm screw cap on each one, for greater weighted stability. Each side has red and silver reflective criss-crossing strips for maximum visibility across the whole barrier. Sturdy yet flexible material allows for quick and easy stowing.


<b>Weight:</b>	2.36kg
----------------	--------

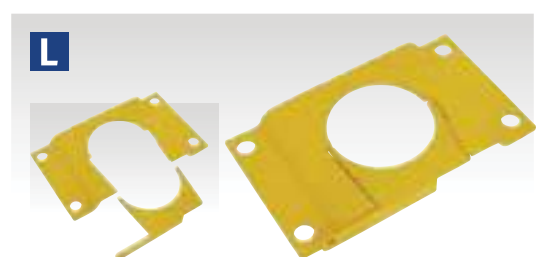

**L Removable Bollard Base Plate - Locking**  
Model No. RBLP

Steel bollard base plate fixes permanently in place using four pre-drilled Ø23.5mm mounting holes (fixings not supplied). Base will fit various sizes of bollards (not supplied) - especially suited to Sealey Model No's. BOL600, BOL900, BOL1050 and BOL1200. Ø11mm Padlock hole will accommodate most robust padlock designs such as Sealey Model No. PL402L.

<b>Minimum Height:</b>	30mm
<b>Width:</b>	340mm
<b>Weight:</b>	3.54kg

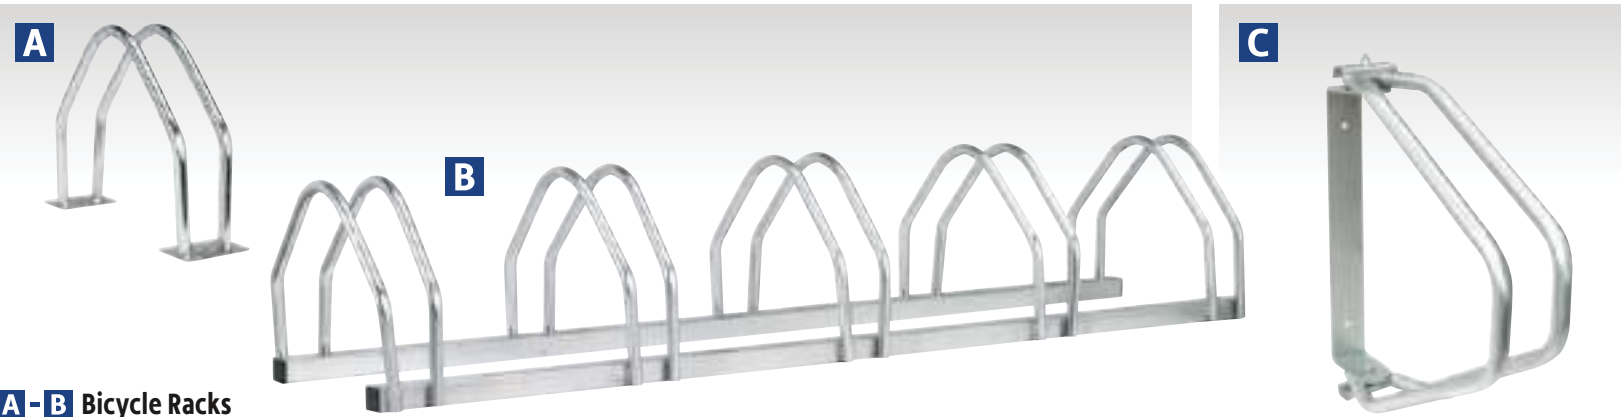

**A - B Bicycle Racks**  
Model No. [SEE BELOW](#)

Heavy-duty bicycle racks, manufactured from galvanized steel for corrosion resistance.

	<b>A</b>	<b>B</b>
Model No:	BS14	BS16
Bicycle Capacity:	1	5
Dimensions (W x D x H):	90 x 260 x 365mm	1420 x 260 x 320mm
Maximum Tyre Width:	55mm	55mm

**C Adjustable Wall Mounting Bicycle Rack**  
Model No. [BS13](#)

Wall mounting bicycle rack. Heavy-duty galvanized steel construction with 180° swivel movement.



**D Dual Height Bicycle Rack for 5 Bicycles**  
Model No. [BS18](#)

Manufactured from heavy-duty galvanized steel tubing for corrosion resistance. Suitable for storing up to five bicycles, including models fitted with disc type brakes. Features dual height positions to ensure that bicycles do not damage each other while stored.

Bicycle Capacity:	5
Dimensions (W x D x H):	1370 x 400 x 320mm
Maximum Tyre Width:	50mm

**F Front Wheel Wall Mounting Bicycle Rack**  
Model No. [BS19](#)


Wall mounting and cleverly designed to allow bicycle to be stored vertically. Ideal for garages or outside where floor space is limited. Strong tubular frame supports bicycle tyre, avoiding damage to spokes and paintwork. Can also be used with a chain and lock for added security. Suitable for both road and mountain bikes. Supplied with heavy-duty fixing bolts.

Maximum Wheel Width:	68mm
Maximum Wheel Diameter:	Ø28" (711mm)
Size (W x D x H):	100 x 590 x 280mm
Maximum Capacity:	80kg



**G Combination Cable Lock**  
Model No. [CCL01](#)

Lightweight and convenient enough to carry in a pocket. Simple 3-digit combination retracting cable lock can be used in various daily situations to secure items and belongings. Uses 950mm long, Ø1.4mm cable to secure cycle helmet or bags to the cycle, pushchair or buggy to a secure location or for securing a crash helmet or jacket to motorcycle (Note this is not a motorcycle security product). Retract button to reel cable in for easy storage, or to shorten length of cable when locked.

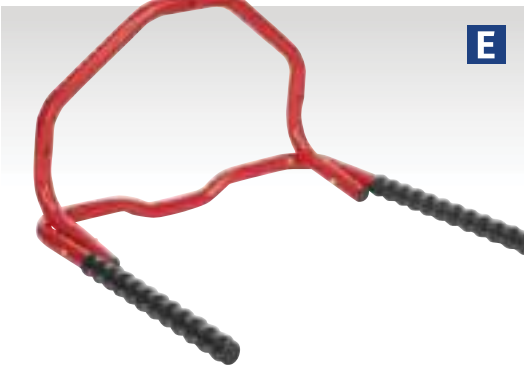

**E Folding Bicycle Rack - Wall Mounting**  
Model No. [BS7](#)

Wall mounting storage rack. Arms fold up when unloaded for compact storage. Supports up to two bicycles.

Width:	500mm
Arm Length:	490mm
Maximum Capacity:	40kg



**Chain Locks**

We have a full range of motorcycle locks which are suitable for bicycles, see page 353 for more details.





**A Workshop Bicycle Stand**  
Model No. BS102

Manufactured with steel tubes and fitted with rubber coated frame clamp which helps prevent damage to paintwork. Features large rubber feet for added stability and multi-position tool tray to ensure tools are always close to hand. Adjustable work height from 1050mm to 1750mm.

Minimum Height:	1050mm
Maximum Height:	1750mm
Maximum Load:	30kg
Weight:	6kg



**B Workshop Bicycle Stand**  
Model No. BS103

Adjustable work height and fitted with articulated rubber coated frame clamp preventing damage to paintwork. Features four folding legs with a 1370mm span for added stability and multi-position tool tray to ensure tools are always close to hand.

Minimum Height:	1050mm
Maximum Height:	1750mm
Maximum Load:	30kg
Weight:	6.2kg



**C 3ft Bicycle Carrier Lighting Board with 2m Cable**  
Model No. TB3/2

Composite 3ft board fitted with 2m of 7-core cable and 12V N-type plug. Includes two E-Approved reflectors and two 4-function lamp clusters (stop, tail, indicator and number plate illumination light).

**Important: Standard trailer boards should not be used in conjunction with bicycle carriers.**




**D 12V LED Magnetic Rear Lighting Set**  
Model No. TB18LEDMAG

Easy-to-install modern direct replacement magnetic trailer lighting set. 5-Function SMD LED rear cluster includes - Stop/Tail/Indicator/Numberplate Illumination/Reflector. Includes 2.5m of 7-core connecting cable and 7.5m main cable fitted with 12V 7-pin N-type plug. R10, CE and E-Marked.



**E 5V Heated Puffy Gilet**  
Model No. WPHG01

Water-resistant gilet with three carbon fibre heating elements. Heating elements are in the back and each side of the chest. Three different heat modes controlled by colour changing button (White - Low, Blue - Medium, Red - High). One size fits all design with adjustable chest and waist size. Power bank not included but required, recommended 2A output for optimum use.

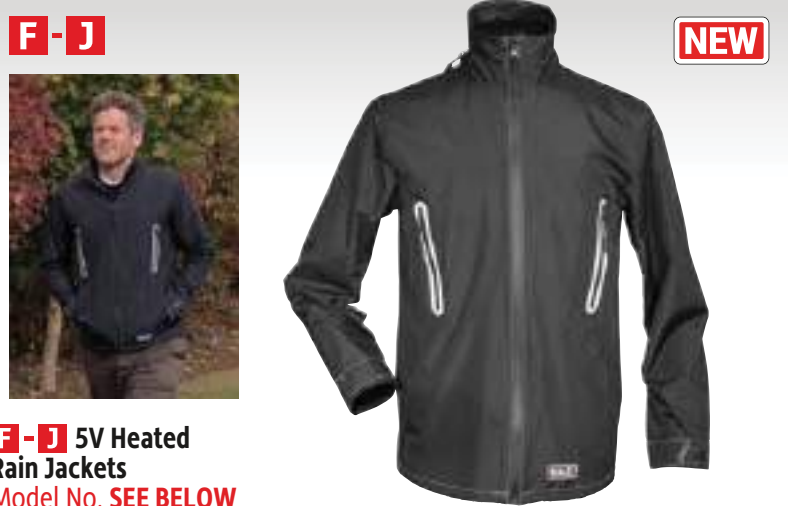

**F-J 5V Heated Rain Jackets**  
Model No. SEE BELOW

Water-resistant jackets with three carbon fibre heating elements. Heating elements are in the back and each side of the chest. Three different heat modes controlled by colour changing button (Blue - Low, Green - Medium, Red - High). Power bank not included but required, recommended 2A output for optimum use.

Model No:	Size:
F WPHJ05	Extra-Small
G WPHJ01	Small
H WPHJ02	Medium
I WPHJ03	Large
J WPHJ04	Extra-Large



### C - D Solar Power Panels

Model No. SEE BELOW

Amorphous solar panels convert daylight directly into 12V electricity. Suitable for maintaining charge in a wide range of batteries and power packs. Ideal for batteries stored in boats and caravans and for batteries in vehicles in long-term storage. IP44 Rating (non-waterproof). For use behind car windscreen or other protection. Supplied with battery clips and vehicle accessory socket plug (only suitable for vehicles with "permanent live" accessory socket).

Model No:	Output:	Dimensions:
C SPP01	12V/1.5W	350 x 125mm
D SPP03	12V/4.8W	440 x 345mm



### A Motorcycle Covers with Solar Panel Pocket

Model No. SEE BELOW

Ideal for protection, rain or shine, against weathering and fading. Double layer cover for extra protection. Inner layer is made from soft anti-scratch material to protect motorcycle's paintwork. Has a clear PVC pocket to accept Model No. SPP01 solar panel (requires Model No. SPP01.A adaptor) to enable battery charging while cover is fitted to the motorcycle without the need for mains power supply. Elastic corners with strap and buckle for easy and secure fitting. Eyelet enabling wheel lock to be fitted. Supplied in a storage bag.

Model No:	Size:	Dimensions (L x W x H):
MCS	Small	1830 x 890 x 1300mm
MCM	Medium	2320 x 1000 x 1350mm
MCL	Large	2460 x 1050 x 1370mm

### B Motorcycle Coveralls with Solar Panel Pocket

Model No. SEE BELOW

A fully enclosed cover; the two halves zip together to completely protect the motorcycle, rain or shine, against weathering and fading. Double layer 190T silver polyester cover for extra protection. Inner layer is made from soft anti-scratch material to protect motorcycle's paintwork. Base is made from hard-wearing 420D with PVC coating. Has a clear PVC pocket to accept Model No. SPP01 solar panel (requires Model No. SPP01.A adaptor) to enable battery charging while cover is fitted to the motorcycle without the need for mains power supply. The cover has side vent holes to aid air circulation. Supplied in a storage bag.

Model No:	Size:	Dimensions (L x W x H):
MCBM	Medium	2270 x 990 x 1370mm
MCBL	Large	2460 x 990 x 1370mm
MCBXL	X-Large	2740 x 990 x 1540mm



### E Folding Wheel Step

Model No. STS01

Heavy-duty wheel step gives safe and easy access to engine or top of vehicle, ideal for 4x4s. Heavy gauge all steel construction folds for easy storage. Suitable for wheel diameters between Ø14"-20" and will fit tyres up to 10" deep. Rubber topped platform for added grip and safety. Platform is height adjustable (three mounting points 90mm apart).

Capacity:	225kg
Platform Size:	210 x 560mm
Wheel Diameter:	Ø14"-20"



### A Lightweight Car Covers

Model No. [SEE BELOW](#)

Made from lightweight, anti-scratch material to protect vehicle's paintwork. Side-opening zips give access to vehicle doors without removing cover. Features elastic corners for easy and secure fitting. Fitted with fastening clip to secure cover onto vehicle. Suitable for dust protection and resistant to light rain.

Model No:	Dimensions (L x W x H):
CCES	3800 x 1540 x 1190mm
CCEM	4060 x 1650 x 1220mm
CCEL	4300 x 1690 x 1220mm
CCEXL	4830 x 1780 x 1220mm

### B Car Covers

Model No. [SEE BELOW](#)

Ideal for protection, rain or shine, against weathering and fading. 2-Layer cover for extra protection. Inner layer is made from soft anti-scratch material to protect vehicle's paintwork. Elastic corners for easy and secure fitting. Side-opening zips give access to vehicle doors without removing cover. Supplied with waterproof storage bag.

Model No:	Dimensions (L x W x H):
CCS	3800 x 1540 x 1190mm
CCM	4060 x 1650 x 1220mm
CCL	4300 x 1690 x 1220mm
CCXL	4830 x 1780 x 1220mm

### C 3-Layer All-Seasons Car Covers

Model No. [SEE BELOW](#)

Professional all-seasons car covers, manufactured from completely waterproof 3-layer breathable composite material, which allows condensation to evaporate. Can be used inside or outside to protect vehicle from elements that could be potentially damaging. Cover is easy to fit using the elasticated edges which fit around the vehicle's bumper and ties down securely with under car straps. This range of car covers also protects from UV/heat, environmental pollutants, bird droppings plus snow and ice.

Model No:	Dimensions (L x W x H):
SCCS	3800 x 1650 x 1200mm
SCCM	4050 x 1650 x 1200mm
SCCL	4550 x 1650 x 1200mm
SCCXL	5100 x 1780 x 1240mm
SCCXXL	5100 x 1950 x 1520mm



UV stable material ensures cover can be used during Summer months to protect vehicle from heat and the sun's rays without the risk of fabric degradation.



With use of external seams, this cover minimises the risk of abrasion and ensures the cover is completely waterproof.



Cover provides resistance to environmental pollutants, tree sap and bird droppings.



Cover protects vehicle against snow and ice, thanks to its waterproof 3-layer design.



Made using a 3-layer cover allowing paintwork to breathe, preventing condensation forming and reducing the risk of damaging the vehicle's paintwork.







**A - B Vehicle Storage Shelters**  
**Model No. SEE BELOW**

Made from durable anti-scratch material to protect vehicle's paintwork. Rigid tubular frame with hinged opening for easy-access. Adjustable side vents allow increased ventilation while still keeping vehicle protected from elements. Includes anchor points for fixing shelter to driveway/ground (fixings not included). Padlock hasp for increased security when canopy is closed.

Model No:	Overall Size (W x D x H):
A MCS01	1050 x 2700 x 1550mm
B MCS02	1800 x 3400 x 1900mm



**C Vehicle Storage Shelter**  
**Model No. CCS01**

Made from durable anti-scratch material to protect vehicle's paintwork. Rigid tubular frame with hinged opening for easy-access. Hook-and-loop vents allow increased ventilation while still keeping vehicle protected from elements. Includes anchor points for fixing shelter to driveway/ground (fixings not included). Central padlock hasp and additional ground anchor point for increased security when canopy is closed.

Overall Size (W x D x H):	2700 x 5500 x 2000mm
---------------------------	----------------------





**A 3.0 x 5.2 x 2.4m Instant Car Port Shelter**  
**Model No. CPS01**

Allows for temporary or permanent storage of small cars, boats, materials and machinery. Manufactured from a strong, rust resistant thermoset powder coated steel frame and 3-layer heavy-duty polyethylene tarpaulin cover, with rip-stop to help prevent tears. Includes stake pegs to secure unit against strong winds and side skirting to protect against crosswinds. Features a wide opening double zip door which can be rolled up to provide easy-access. Cover is UV resistant for long-life and gives protection for stored items.

**Size (W x D x H):** 3 x 5.2 x 2.4m

**B 4 x 6 x 3.1m Dome Roof Car Port Shelter**  
**Model No. CPS03**

Allows for temporary or permanent storage of small cars, boats, materials and machinery. Manufactured from a strong, rust resistant thermoset powder coated steel frame and 3-layer heavy-duty polyethylene tarpaulin cover, with rip-stop to help prevent tears. Includes stake pegs to secure unit against strong winds and side skirting to protect against crosswinds. Features a wide opening double zip door which can be rolled up to provide easy-access. Cover is UV resistant for long-life and gives protection for stored items. Features a dome roof design to further protect against strong winds.

**Size (W x D x H):** 4 x 6 x 3.1m

**C 3.3 x 7.5 x 2.9m Instant Car Port Shelter**  
**Model No. CPS02**

Allows for temporary or permanent storage of large cars, boats, materials and machinery. Manufactured from a strong, rust resistant thermoset powder coated steel frame and 3-layer heavy-duty polyethylene tarpaulin cover, with rip-stop to help prevent tears. Includes stake pegs to secure unit against strong winds and side skirting to protect against crosswinds. Features a wide opening double zip door which can be rolled up to provide easy-access. Cover is UV resistant for long life and gives protection for stored items.

**Size (W x D x H):** 3.3 x 7.5 x 2.9m



CPS01 is secured using heavy-duty ratchet tie downs.



CPS02 & CPS03 feature clips to keep shelter door open when in use.



**A 2.5 x 4.5 x 2.5m Foldable Garage Extension**

**Model No. FGE01**

Foldable garage extension, perfect for allowing temporary use of a driveway as a garage. Supplied with a powder coated steel frame. 195g/m2 PE Tarp with UV protection and completely waterproof.

<b>Door Size (W x H):</b>	2500 x 2000mm
<b>Overall Size (W x D x H):</b>	2.5 x 4.5 x 2.5m
<b>Material:</b>	195g/m2 PE Tarp and Steel
<b>Weight:</b>	122kg

**B Outdoor Storage Box**

**Model No. SBSC01**

Manufactured from heavy-duty polypropylene, maintenance-free and fully weatherproof. Features hinged lid which can be padlocked (not included) for added security. Fitted with two carry-handles, closed ventilation and two integral wheels on base for easy manoeuvrability. Ideal for use in multiple domestic applications, including garden tool and furniture storage. Supplied flat packed and easily assembled with no tools required.

<b>Specification:</b>	<b>Width:</b>	<b>Depth:</b>	<b>Height:</b>
<b>External Size:</b>	1120mm	460mm	540mm
<b>Internal Size:</b>	1100mm	450mm	500mm
<b>Maximum Load:</b>			150kg
<b>Weight:</b>			9.8kg

