

HOW TO ORDER



Our aim is to make ordering as quick, easy and convenient as possible. Our products are available via a comprehensive network of stockists throughout the UK, Ireland and the rest of the world.

Our Distributors hold stock of fast-moving items. If they do not have the specific item that you require, they can order it from us and we will deliver it promptly.

Finding your local Stockist is quick and easy, either visit www.sealey.co.uk or call us on the number shown below.



+91 9380647428

+91 8073843541



info@vandita-technovations.in



www.vandita-technovations.in

Our call centre is open between 8.30am to 5.30pm Monday to Friday. Calls are immediately passed to the first available operator without any complicated routing process. Our experienced, professional and friendly advisors can provide instant stock availability, pricing and technical information.

Our authorised stockists can order direct from us via telephone, email, fax or online using our B2B (Business to Business) website. Here, you can place your order at a time that suits you and view instant stock availability and pricing.

HUGE STOCKS & FAST DESPATCH

We hold over £30million worth of stock. Modern, computer controlled warehousing enables, on average, 99.8% of our entire product range to be despatched straightaway.

Some items in our Catalogue are very heavy and extra assistance is recommended at the delivery point to help unload. Look out for this logo on products affected.



1	HAND TOOLS	14-264
2	JACKING & LIFTING	265-324
3	MOTORCYCLE TOOLS	325-353
4	BATTERY CHARGERS	354-377
5	VEHICLE SERVICE TOOLS	378-629
6	LUBRICATION	630-677
7	BODYSHOP	678-729
8	AIR POWER TOOLS	730-764
9	COMPRESSORS	765-796
10	WELDING & CUTTING	797-819
11	ELECTRIC POWER TOOLS	820-857
12	POWER TOOL ACCESSORIES	858-912
13	LIGHTING & POWER	913-953
14	STORAGE & WORKSTATIONS	954-1073
15	HEATING & COOLING	1074-1095
16	JANITORIAL, MATERIAL HANDLING & LEISURE	1096-1176
17	MACHINE SHOP	1177-1236
18	SAFETY PRODUCTS	1237-1264
19	CONSUMABLES	1265-1331
INDEX - MODEL NO.		1332-1362
INDEX - DESCRIPTIVE		1363-1370

LIGHTING & POWER

SECTION 13

back to
SECTION LIST



Cable Reels

946 - 948

Extension Leads

945

Floodlights

934 - 938

Generators

951 - 953

Head Torches

914 - 916

Inspection Lights

921 - 931

Magnifying Work Lights

944

Penlights

916 - 917

Plugs & Accessories

945 - 949

Power Inverters

950 - 952

Site Lights

937 - 938

Spotlights

920

Torches

917 - 919

Transformers

949

Under-Bonnet Lights

939 - 940

Vehicle Work Lights

941 - 943



A 3W SMD & 2 Red LED Head Torch

Model No. HT03LED

Hands-free LED spotlight. Features one high power 3W white LED for general use and two red LEDs, which can be used at night to help maintain night vision. Adjustable inclination to direct light source as required and adjustable headband. Push-button mode activation.

LED Type:	3W SMD + 2 Red LED
Lumen Output:	120lm
Battery:	3 x AAA (not included)



B 3W COB LED Head Torch

Model No. HT101

Hands-free 3W COB LED spotlight with adjustable inclination to direct light as required. Main light features high, low and flash settings. Produces up to 200 lumens. Adjustable headband and foam brow pad for added comfort.

LED Type:	3W COB
Lumen Output:	200lm
Battery:	3 x AAA (not included)



C XP-G2 CREE LED Intrinsically Safe ATEX/IECEX Approved Head Torch

Model No. HT452IS

Single high power XP-G2 CREE LED produces extremely bright, white light with an output of 216/100 lumens (high/low) and a working range up to 100/75 metres. Three mode push-button for high, low and off settings. Operating time 5/12 hours. Intrinsically safe for use in hazardous locations. Lightweight, tough and durable casing which will sustain high impacts and drops. Adjustable headband attaches to hard hat or head. Light angle adjustable by up to 90° to suit every situation. Built-in gas release vent. Battery compartment secured with screws to prevent inadvertent opening in hazardous area.

LED Type:	CREE XP-G2
Lumen Output (High/Low):	216lm/100lm
Battery:	3 x AAA (not included)



D - F 2W COB LED Rechargeable Head Torches with Auto-Sensor

Model No. SEE BELOW

New design 360° multifunction COB LED rechargeable head torches. Headband can also be used as a wristband. When the band is removed, the work light can be attached to objects via the integral clip. Can also be used as a stand alone table light. One button includes five different lighting options. First press is 100% white light, second dims to 40% white light, third is red warning light (1W COB LED) and fourth is red warning flash, which makes it ideal for cycling. Holding the button enables auto-sensor function to switch on/off just by waving hand in front. Adjustable head/wrist band and foam brow for added comfort. Powered by 3.7V 0.5Ah Li-Poly battery. Supplied with micro USB charging cable.

LED Type:	2W COB	Model No:	Colour:
Lumen Output (High/Low):	160/60lm	D LED360HT	Black
Operating Time (High/Low):	2.5/4hr	E LED360HTG	Green
Charging Time:	1.5hr	F LED360HTR	Red
Battery:	3.7V 0.5Ah Li-Poly		



G 3W CREE LED Rechargeable Head Torch

Model No. HT105LED

Hands-free CREE XPE LED spotlight with adjustable inclination to direct light as required. Features three settings - full light, low light or flashing. Adjustable headband and foam brow for added comfort. Supplied with micro USB charging lead.

LED Type:	3W CREE
Lumen Output:	220lm
Operating Time:	3hr @100%, 10hr @ 30%
Charging Time:	4hr
Battery:	3.7V 1.5Ah Li-ion



A - B 5W COB LED Head Torches with Auto-Sensor
Model No. SEE BELOW

Hands-free 5W COB LED with 40° angle-adjustment. Dimmer switch allows brightness to be adjusted from 20% to 100%. Main light has one switch with four functions, on, flash, auto-sensor and off. Hold down switch to enable auto-sensor function which will allow turning on/off just by waving hand in front. Rear of strap includes a red LED warning light which has two functions, flash or on, ideal for a cycling light. Adjustable headband and foam brow for added comfort. Model No. HT111R is powered by rechargeable 3.7V 2.2Ah Li-ion battery and includes a battery charging level indicator and a micro USB charging lead. Model No. HT111LED is powered by 3 x AA batteries (not included).

	A	B
Model No:	HT111R	HT111LED
LED Type:	5W COB	5W COB
Lumen Output (High/Low):	450/110lm	350/80lm
Operating Time (High/Low):	2.5/8.5hr	-
Charging Time:	3.5hr	n/a
Battery:	3.7V 2.2Ah Li-ion	3 x AA (not included)



C 3W CREE XPE LED Rechargeable Head Torch with Auto-Sensor
Model No. HT102R

Hands-free head torch with adjustable 3W CREE XPE LED spotlight to direct light as required. One switch features an auto-sensor to activate light with the wave of a hand and standard on/off switch. Produces up to 125 lumens. Other switch has four options - full, 50% energy saving mode, flash and red light. Powered by a rechargeable 3.7V 1.2Ah Li-ion battery. Supplied with micro USB charging lead.

LED Type:	3W CREE XPE
Lumen Output (100%/50%):	125/73lm
Operating Time (100%/50%):	3/4hr
Charging Time:	4hr
Battery:	3.7V 1.2Ah Li-ion



D 3W CREE XPE LED Rechargeable Head Torch with Auto-Sensor
Model No. HT106LED

Hands-free 3W CREE XPE LED spotlight with adjustable inclination to direct light as required. Features auto-sensor to switch on/off just by waving hand in front. Alternatively can be overridden to stay on/off by push-button. Two brightness settings. Adjustable headband and foam brow for added comfort. Powered by rechargeable 3.7V 1.5Ah Li-Poly battery. Supplied with micro USB charging lead.

LED Type:	3W CREE XPE
Lumen Output (100%/30%):	180/60lm
Operating Time (100%/30%):	3/9hr
Charging Time:	4hr
Battery:	3.7V 1.5Ah Li-Poly



E 3W CREE XPE LED Head & Hat Torch
Model No. HT103LED

3W CREE XPE LED with adjustable inclination to direct light as required. Features optical zoom for dissipating the spread of light. Removable light with clip-on hat function. Adjustable headband and foam brow pad for added comfort. Push-button on/off switch.

LED Type:	3W CREE XPE
Lumen Output:	100lm
Battery:	3 x AAA (not included)



F 5W CREE XPG LED Rechargeable Head Torch with Auto-Sensor
Model No. HT108LED

Hands-free head torch with adjustable 5W CREE XPG LED spotlight to direct light as required. Features auto-sensor to activate light with the wave of a hand and standard on/off switch. Two power options of full and a 30% energy saving mode. Powered by rechargeable 3.7V 2Ah Li-ion battery. Supplied with micro USB charging lead.

LED Type:	5W CREE XPG
Lumen Output (High/Low):	360/100lm
Operating Time (High/Low):	2/6hr
Charging Time:	6hr
Battery:	3.7V 2Ah Li-ion





A - B 4 SMD LED USB Rechargeable Beanie Hats
Model No. **SEE RIGHT**

Warm and comfortable beanie hats with a removable SMD spotlight. Features three light settings - full light (100%) medium light (75%) and low light (50%). Positioning of the LED gives a sufficient beam of light ahead of the user. Removable lamp is chargeable via a USB port. Powered by a rechargeable 3.7V 300mAh Lithium-Polymer battery. Model No. LED185W includes wireless headphones for phone calls and music 2.4GHz transfer speed up to 10m.



LED Type:	4 SMD
Lumen Output (100/75/50%):	120/90/60lm
Operating Time (100/75/50%):	2/4/5hr
Charging Time:	3hr
Battery:	3.7V 300mAh Li-Poly
Model No:	Wireless Headphones:
A LED185	<input checked="" type="checkbox"/>
B LED185W	<input checked="" type="checkbox"/>



C 3W CREE XTE & 1W COB LED Aluminium Penlight
Model No. **LED016**

Powerful, precise and pocket-sized penlight. 1W COB gives extremely bright light with up to 50 lumen output. CREE XTE side light with up to 55 lumen output. On/off fingertip switch.

LED Type:	3W CREE XTE + 1W COB
Lumen Output:	XTE - 55lm, COB - 50lm
Length:	142mm
Operating Time:	3hr
Battery:	1 x AAA (not included)



D 0.5W LED Aluminium Penlight
Model No. **LED043**

Powerful, precise and pocket-sized penlight. 0.5W LED gives extremely bright light with up to 50 lumen output. On/off fingertip switch.

LED Type:	0.5W LED
Lumen Output:	50lm
Length:	130mm
Battery:	2 x AAA (not included)



E 7 SMD & 1W LED Rechargeable Inspection Penlight
Model No. **LED047**

Seven SMD LED inspection lamp coupled with a bright 1W LED directional torch. USB rechargeable Lithium-Ion battery with charging indicator, suffers no memory effect so performs better for longer. A strong magnet in the pocket/belt clip allows for hands-free use. Supplied in a presentation box with a USB lead.

LED Type:	7 SMD + 1 LED
Lumen Output (Side/Top):	120/80lm
Operating Time (Side/Top):	2.5/4hr
Charging Time:	1.5hr
Length:	168mm
Battery:	3.7V 750mAh Li-Ion



F 3W COB LED Penlight Torch
Model No. **LED125**

Professional aluminium design, features pocket/belt clip with integrated magnet for hands-free operation. Produces up to 280 lumens. Ideal for use in the workshop, garage and home.

LED Type:	3W COB
Lumen Output:	280lm
Length:	162mm
Operating Time:	1.5-2hr
Battery:	3 x AAA (not included)



G 3W Ultraviolet COB LED Penlight Torch
Model No. **LED125UV**

Professional aluminium design, features pocket/belt clip with integrated magnet for hands-free operation. Produces an ultra violet light for fault finding with fluorescent dyes used in leak detection. Ideal for use in workshops or garages.

LED Type:	3W COB
Wavelength:	395-400nm (UVA)
Operating Time:	2-3hr
Length:	162mm
Battery:	3 x AAA (not included)

A-C COB & SMD LED Rechargeable Slim Pocket Lights

Model No. **SEE BELOW**

Slimline pocket lamps for use in confined spaces. Inspection arm can be folded 180° for hands-free use. Super bright COB and SMD LED, 6000-7000k, 80+CRI. High-impact plastic housing with aluminium light and a strong magnet on the bottom. Lumens Output and Operating Time: Top Spotlight; (80lm)/(3hr runtime), Front Light (100/200lm); (3.5hr/1.5hr runtime), Rear Light; (180lm)/(2hr runtime). Rechargeable high quality 3.7V 700mAh Li-ion battery with a charging time of 2.5hr. Flashing warning light when battery is low. Includes 1 LED indicator - flashes green for charging, continuous green for full charge. Supplied with USB charging cable. Available in blue, red and green.

LED Type: 2 x COB + 1 x SMD

Lumen Output Top/Front(High/Low)/Rear: 80/(200/100)/180lm

Operating Time Top/Front(High/Low)/Rear: 3/(1.5/3.5)/2hr runtime

Charging Time: 2.5hr

Length Folded: 165 x 20 x 28mm

Length Extended: 300 x 20 x 28mm

Battery: 3.7V 700mAh Li-ion

Model No: **Colour:**

A LED01B Blue

B LED01R Red

C LED01G Green



See our fully portable powerbank Model No. SPB160W on page 944 for full specification.



D NEW

COB LED

220 LUMENS

Ultraviolet

LITHIUM RECHARGEABLE



D 3W COB & 1 SMD LED Rechargeable Aluminium Pocket Light with UV
Model No. **LED220UV**

Powerful 3W COB with 1 x SMD and 2 x UV SMD. USB rechargeable Lithium-ion battery with small green/red charging indicator light. Made from aluminium, anodized and finished with rubber coating for a more premium feel. A strong magnet in the pocket/belt clip allows for hands-free use as well as a second strong magnet in the base. Features two longwave UV-A SMDs at 390-400nm.

LED Type: 3W COB, 1W SMD, 2 x UV SMD

Lumen Output: 220lm

Charging Time: 3hr

Length: 110mm

Battery: 3.7V 2200mAh Li-ion

E

360°
PATENTED DESIGN
EXCLUSIVE TO SEALEY

200 LUMENS

LITHIUM RECHARGEABLE



360°
SMD LED

E 360° 7 SMD & 1W SMD LED Rechargeable Mini Penlight
Model No. **LED3607G**

Unique and innovative 360° swivel ball joint function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. Each lamp houses seven super bright SMD LEDs providing up to 200 lumens output, illuminating the whole work area. Includes an additional high power 1W LED in the end for use as a directional torch. Features a belt clip with integrated magnet on the back of the light and a strong magnet on the bottom which allow hands-free operation. High quality 1.1Ah Lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Micro USB charging port. Supplied with charging lead.

LED Type: 7 SMD + 1W SMD

Lumen Output (Side/Top): 200lm/80lm

Operating Time (Side/Top): 2.5/5hr

Charging Time: 3hr

Length: 172mm

Battery: 3.7V 1.1Ah Li-ion



A 3W SMD LED Rechargeable Ultraviolet Leak Detection Torch
Model No. V56021

Ideal for detecting leaks in air conditioning and cooling systems with the use of fluorescent dye (not included). Illumination can be adjusted from spotlight to wide area, by simple push/pull action of the head. Features lightweight aluminium housing. Battery charged via USB lead (supplied). For best results and protection, we suggest this product is used with Model No. SSP46 Light Enhancing Safety Spectacles (see page 1241).

LED Type:	3W UV SMD
Operating Time:	6-7hr
Charging Time:	5hr
Length:	120mm
Battery:	3.7V 2Ah Li-ion

B 3W LED Torch/Multi-Tool Adjustable Focus
Model No. LED072

Produces extremely bright, white light from the single 3W LED. Sliding action light focus can be adjusted from spotlight to wide area. Includes a hammer and belt cutter for use in an emergency situation. Ideal for storing in glove box. Powered by 3 x AAA batteries (not included).

LED Type:	3W LED
Lumen Output (High/Low):	120/80lm
Operating Time:	8hr
Functions:	Phillips Screwdriver, Slotted Screwdriver, Bottle Opener, Can Opener, Fine Edge Blade, Hex, 5, 6mm, Scissors, Hammer, Belt Cutter
Battery:	3 x AAA (not included)

C 3W LED & 3W COB LED Torch/Inspection Light
Model No. LED069

Twin function light, features a powerful 3W LED directional torch and, by extending the body of the torch, an automatic on/off 3W COB LED inspection lamp. A strong magnet in the base allows for hands-free use. Powered by 4 x AAA batteries (not included).

LED Type:	3W COB + 3W LED
Lumen Output (Top/Side):	50/150lm
Minimum Length:	165mm
Maximum Length:	220mm
Battery:	4 x AAA (not included)



D XPE CREE LED Intrinsicly Safe ATEX/IECEx Approved Flashlight
Model No. LED4521S

Single high power XPE CREE LED produces extremely bright, white light with an output of 120/32 lumens (high/low) and a working range up to 172/85m. Operating time 6/69 hours. 3 Mode push-button for high, low and off settings. Intrinsicly safe for use in hazardous locations. Lightweight, tough and durable casing which will sustain high impacts and drops. Screw fastener prevents inadvertent opening of battery container in hazardous environments. Built-in gas release vent. Features wrist lanyard connection. Powered by 4 x AA batteries (not included).

LED Type:	CREE XPE
Lumen Output (High/Low):	120/32lm
Operating Time (High/Low):	6/69hr
Range (High/Low):	172/85m
Battery:	4 x AA (not included)



E 3500lm Super Boost Rechargeable Osram P9 LED 30W Pocket Light
Model No. LED451

Triple Osram P9 LED 10W produces extremely bright, white light with an output of 1400 lumens, with a 'super boost' output of 3500lm for 35 seconds. Working range up to 250m. Powered by a rechargeable 3.7V 2Ah Li-ion battery. Supplied with micro USB charging lead. ***WARNING*** Please keep out of reach of children, as lens generates heat on 'super boost' setting.

LED Type:	3 x 10W Osram P9 LED
Lumen Output:	Super Boost: 3500lm for 35 seconds; High: 1400lm
Operating Time:	Super Boost for 35 seconds + High: 1.2hr; Low: 10hr
Charging Time:	4-5hr
Range:	250m
Battery:	3.7V 2Ah Li-ion



A 10W CREE XPL LED Rechargeable Aluminium Torch - Adjustable Focus
Model No. LED449

Single 10W CREE XPL LED produces extremely bright, white light with an output of 720 lumens and a working range up to 200m. Focus type can be changed from spotlight to wide area by a twist action of the head. Lightweight aluminium housing. Two power options, full power and 30% energy saving mode. Powered by a rechargeable 3.7V 2Ah Li-ion battery. Supplied with micro USB charging lead.

LED Type:	10W CREE XPL
Lumen Output (High/Low):	720/210lm
Operating Time (High/Low):	2.5/5hr
Working Range:	200m
Battery:	3.7V 2Ah Li-ion

B-F CREE LED Aluminium Torches with Adjustable Focus
Model No. SEE BELOW

Produces extremely bright, white light from the single CREE LED with a working range between 100-200m, depending on model. Focus type can be changed from spotlight to wide area by a twist action of the head, except Model No's LED444 and LED445, which require a sliding action. Lightweight aluminium housing. Two power options, full power and 30% energy saving mode.

	B	C	D	E	F
Model No:	LED444	LED445	LED446	LED447	LED448
LED Type:	3W CREE XPE	3W CREE XPE	5W CREE XPE	10W CREE T6	10W CREE T6
Lumen Output (High/Low):	140/45lm	150/45lm	390/120lm	680/200lm	680/200lm
Operating Time (Maximum):	17hr	8hr	80hr	23hr	80hr
Working Range:	100m	100m	200m	200m	200m
Battery (not included):	3 x AAA	2 x AA	3 x C	2 x D	3 x D



G-J Rechargeable Aluminium Torches with Adjustable Focus
Model No. SEE BELOW

Super powerful LED produces extremely bright, white light with an outputs ranging from 750-4000 lumens and a working range of 100-200m, depending on model. Focus type can be changed from spotlight to wide area by a twist action of the head. Lightweight aluminium housing. Two power options, full power and 30% energy saving mode. Powered by rechargeable Li-ion batteries. Strong magnet on the base. Supplied with micro USB charging lead.

	G	H	I	J
Model No:	LED4491	LED4492	LED4493	LED4494
LED Type:	5W CREE XPG	10W CREE XML	20W CREE XHP50	60W COB
Lumen Output (High/Low):	750/225lm	1000/300lm	2000/600lm	4000/1200lm
Operating Time (High/Low):	2/4hr	2/4hr	2/4hr	4/8.5hr
Range:	100m	100m	200m	100m
Battery:	3.7V 2Ah Li-ion	3.7V 2Ah Li-ion	7.4V 2Ah Li-ion	7.4V 4Ah Li-ion



A - B SMD LED Lanterns
Model No. SEE BELOW

Composite case lanterns with hanging/carry handle. Produces warm white light and features two or three selectable light settings, depending on model.

	A	B
Model No:	LED181	LED182
LED Type:	4 x 0.3W SMD	10 x 0.3W SMD
Lumen Output:	High/Low - 200/18lm	High/Med/Low - 400/145/18lm
Operating Time:	High/Low - 12/70hr	High/Med/Low - 18/75/800hr
IP Rating:	IPX4	IPX4
Battery:	3 x AA (not included)	3 x D (not included)



C 60W/230V Lead Light with Gripper
Model No. ML100G

Tough composite construction, features unique spring loaded mechanism incorporated into handle. Two red rubber covered pads help prevent accidental damage to gripped surfaces. Bulb mounted in ceramic holder and protected by metal grille giving safe, directional light. Supplied with 5m cable.

Power:	60W
Bulb Included:	X
Bulb Fitting:	E27 Cap
Cable Length:	5m
Fitted Plug:	✓
Overall Length:	300mm
Supply:	230V



D 5W/230V SMD LED Lead Light
Model No. ML9230V

High output illumination with even spread of light. SMD LEDs lower power consumption, saving on energy costs, and have a high shock resistance and life span. Supplied with 5m cable.

Power:	5W
LED Type:	SMD
Lumen Output:	420lm
Cable Length:	5m
Colour Temperature:	6500K
Fitted Plug:	✓
Overall Length:	400mm
IP Rating:	IP54
Supply:	230V



E 0.5W LED Spotlight
Model No. AK427

Spotlight with strong composite case with sealed switch and a long lasting, energy efficient LED bulb.

LED Type:	0.5W LED
Lens Diameter:	Ø89mm
Lumen Output:	35lm
Battery:	1 x RJ996 (not included)

F - G CREE LED Rechargeable Spotlights
Model No. SEE RIGHT

Weatherproof composite case. LED43B Features swivel handle, allowing pistol grip or carry handle operation. Integral adjustable foot allows positioning of a number of different angles. Super bright CREE LED spotlights. Two modes of brightness and an emergency amber flashing rear light (LED43B only). Supplied with mains and in-car charger.

	F	G
Model No:	LED43B	LED439
Lens Diameter:	Ø125mm	Ø190mm
Operating Time (High/Standard/Rear):	2.5/7/100hr	2/6hr
LED Type:	10W CREE XML	30W CREE XHP-70
Lumen Output (High/Standard):	850/280lm	2000/800lm
Charging Time:	11hr	13hr
Battery:	3.7V 4Ah Li-ion	7.4V 4.4Ah Li-ion



10W
LUMEN RECHARGEABLE
CREE LED
850 LUMENS



30W
LUMEN RECHARGEABLE
CREE LED
2000 LUMENS



Flashing Light

Shoulder Strap



A 24 SMD & 7 LED Rechargeable Inspection Light Model No. LED307

Heavy-duty housing features 24 super bright SMDs. Seven LEDs in the end for use as a directional torch. 360° Hanging hook and a magnet on rear of lamp for hands-free applications. 3.7V Lithium-ion 1.5Ah battery. Single LED battery indicator. Supplied with 12V in-car charger and mains charger.

LED Type:	24 SMD + 7 LED
Lumen Output (Side/Top):	180/50lm
Operating Time (Side/Top):	16/3hr
Charging Time:	5hr
Length:	210mm
Battery:	3.7V 1.5Ah Li-ion



B 3W COB & 3W SMD LED Rechargeable Inspection Light Model No. LED317

Mini, lightweight lamp. Featuring a super bright 3W COB LED light source, which gives an even and constant spread of light, producing up to 250 lumens. 3W High power LED torch producing up to 100 lumens. Integral hanging hook/belt clip and a magnetic base which can rotate through 180° for hands-free applications. Features a battery level indicator. Rechargeable 3.7V 1.2Ah Li-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Micro USB charging port. Supplied with micro USB cable.

LED Type:	3W COB + 3W SMD
Lumen Output:	250/100lm
Operating Time:	3hr
Charging Time:	2.5hr
Battery:	3.7V 1.2Ah Li-ion



C-D 5W COB & 3W SMD LED Rechargeable Inspection Lights With Power Bank Model No. SEE BELOW

Lightweight lamps. Featuring a super bright 5W COB LED light source, which gives an even and constant spread of light, producing up to 400 lumens. 3W High power LED torch producing up to 100 lumens. Integral hanging hook/belt clip with magnets and a magnetic base which can rotate through 180° for hands-free applications. Features a battery level indicator. Rechargeable 3.7V 2Ah Li-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Built-in emergency power bank to charge mobile devices. Micro USB charging port. Supplied with USB cable.

LED Type:	5W COB + 3W SMD
Lumen Output (Side/Top):	400/100lm
Operating Time (Side/Top):	3/5hr
Charging Time:	3hr
Length:	190mm
USB Output:	5V-1A
Battery:	3.7V 2Ah Li-ion
Model No:	Colour:
C LED318G	Green
D LED318R	Red



E 1W LED directional torch.

Hanging hook on reverse.

1000 lumens, 8W COB LED.

On/Off button incorporates (High/Low)/Top: (2/4)/16hr.

90° Flex with additional 360° twist function.

Rubber covered magnet on base.



E 8W COB & 1W SMD LED Rechargeable Inspection Light Model No. LED1001

Smooth 90° flex with additional 360° twist function enables the light source to be positioned in any direction. Super bright COB LED provides up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 1W LED directional torch. Features a swivel hanging hook and rubber covered magnet on the base, which allow hands-free operation. Two high quality 2.6Ah Lithium-ion batteries for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Type-C charging port. Supplied with Type-C USB cable.

LED Type:	8W COB + 1W SMD
Lumen Output Side(High/Low)/Top:	(1000/500)/100lm
Length:	240mm
Operating Time Side(High/Low)/Top:	(2/4)/16hr
Charging Time:	5hr
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-ion (x2)



F 3 LED Wind-Up Rechargeable Torch Model No. AK3305

Bright LED light available under all conditions with 30 minutes illumination from 1 minute's winding. Ideal for outdoor activities and as an emergency torch in the home or car. Includes a charging outlet port with adaptors to micro USB capable of charging mobile phones. Two switchable levels of brightness. No batteries or bulbs to replace.

LED Type:	3 LED
Operating Time:	1 LED - 30min, 3 LEDs - 15min



A 270lm Osram P8 LED Aluminium Magnetic Flexi-Head Light
Model No. LED021

Osram P8 LED produces 270 lumens. Flexible head bends and holds position to allow bright illumination in confined spaces. Adjustable focus from spotlight to wide area by a push/pull action of the head. Features a magnet in the end for hands-free use.

LED Type:	Osram P8
Lumen Output:	270lm
Range:	100m
Operating Time:	4hr
Battery:	3 x AAA Batteries (Not Included)



B 5W COB & 1 SMD LED Flexi Rechargeable Inspection Light
Model No. LEDFLEXG

Unique new 360° design made from high-impact materials. High power COB LED produces up to 500 lumens in tight spaces like engine compartments. Features a 160mm strong heavy-duty flexible neck with the ability to hold its position wherever you need it. Top light is a 3W LED producing up to 120 lumens. Features a sturdy base which means it can also be used as a desk lamp. Base includes a strong magnet and 90° folding hook. One switch controls top light, side light and dimmer function. Features LED battery charge level indicator and charges via a USB Type-C lead. (Supplied with USB Type-C Cable).



LED Type:	5W COB + SMD
Lumen Output (Side/Top):	50-500lm/120lm
Operating Time (Side/Top):	16-2hr/9.5hr
Length:	425mm
Charging Time:	4hr
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-ion



C 6W COB & 1W SMD LED Rechargeable Slim Inspection Light
Model No. LED186

Slimline foldout inspection lamp for use in confined spaces with its slim 9mm thickness. Inspection arm can be rotated 180° and folded. Features 1 COB LED, which produces up to 550 lumens and a 1W SMD LED on the end for use as a directional torch. Main light has two different lighting modes High/Low (550lm/220lm) and the SMD spotlight which has one setting at 80lm. Suitable for hands-free operation with a magnet and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Powered by a 3.7V 2Ah rechargeable Lithium-ion battery, which lasts up to 8 hours. Supplied with USB charging lead.

LED Type:	6W COB + 1W SMD
Lumen Output: Side(High/Low)/Top:	(550/220)/80lm
Charging Time:	3hr
Operating Time: Side(High/Low)/Top:	(2.5/4)/8hr
IP Rating:	IPX4
Maximum Length:	270mm
Minimum Length:	155mm
Battery:	3.7V 2Ah Li-ion



1W SMD LED directional torch.

550 Lumens, 1W COB.

9mm Thickness.

Can be rotated 180° and folded.

On Off Button incorporates (High/Low) 550lm/220lm.

Up to 8 hours of continuous use on one charge.

Hanging hook and magnet.



D 6W LED Rechargeable Light
Model No. LED176

Composite construction, rechargeable inspection lamp. High output with even spread of light up to 400 lumens. Features 50% or 100% lighting modes, 360° hanging hook, battery level indicator and micro USB charging port. Supplied with micro USB charging lead.

Lamp Type:	20 LED
Lumen Output (High/Low):	400/200lm
Operating Time (High/Low):	2/4hr
Charging Time:	3hr
Overall Length:	465mm
IP Rating:	IP20
Battery:	3.7V 2.2Ah Li-ion



A 20W COB LED Rechargeable Portable Floodlight & Power Bank
Model No. **LED184**

Die-cast aluminium housing with integral 180° adjustable stand. COB LED technology allows ultra-bright illumination. Power switch has three brightness settings (low, medium and high) producing up to 1900 lumens. Features battery level indicator and a 5V-1A USB output for charging electronic devices. Supplied with USB charging lead.

LED Type:	20W COB
Lumen Output (100/50/25%):	1900/1100/550lm
Operating Time (100/50/25%):	1.6/3.5/4.5hr
Charging Time:	9hr
IP Rating:	IPX4
Battery:	3.7V 2Ah Li-ion (x3)



NEW
180°
Swivel Action
250 LUMENS

COB LED

B 3W COB LED Work Light with Clamp
Model No. **LED100C**

3W COB LED that produces up to 250lm. Made from tough ABS plastic with a moulded grip and a soft finish. Clamp opens up to 3". Lamp can be separated from the grip and used as a small handheld torch or mounted to any magnetic surface. Features 360° rotating ball joint to allow for greater coverage.

LED Type:	3W COB
Lumen Output:	250lm
Operating Time:	5hr
Battery:	3 x AA (not included)



NEW
COB LED
UP TO 1000 LUMENS
LITHIUM RECHARGEABLE

C 10W COB LED Rechargeable Pocket Floodlight with Powerbank
Model No. **LED1000PB**

Compact, lightweight design with a massive 1000lm output. Made with a tough ABS plastic housing with flip out magnetic bracket that hides a small carabiner, which can be used when no ferrous surface is available. Includes USB 5V-1A output for secondary use as a power bank. Magnetic bracket can be angled at a range of 120° making it simple and easy to direct up to 1000 lumens of light. Three light output settings; full 1000lm, half 500lm and flashing. Features LED battery level indicator. Fitted with a high quality 3.7V 4.5Ah Lithium-ion battery. Charges via a micro USB lead. (Supplied with micro USB cable.)

LED Type:	10W COB
Lumen Output:	1000lm
Operating Time:	4hr
Charging Time:	3.5hr
IP Rating:	IPX4
Battery:	3.7V 4500mAh Li-ion



D-G 360° COB LED Rechargeable Pocket Floodlights with Magnet
Model No. **SEE BELOW**

Incredibly tough aluminium housing with sturdy handle which can rotate through 360°. Virtually indestructible and one of the most durable floodlights available. Also fitted with a strong magnet, making it simple and easy to direct light. Three light output settings. Features three LED battery level indicator. Fitted with a high quality 3.7V Lithium-ion battery. Charges via USB Type-C lead (USB Type-C Cable included).

LED Type:	7W COB
Lumen Output (High/Mid/Low):	700/350/100lm
Operating Time (High/Mid/Low):	2/4/10hr
Charging Time:	4hr
Length:	95mm
IP Rating:	IP65
Battery:	3.7V 2.6Ah Li-ion
Model No:	Colour:
D LED700P	Green
E LED700PR	Red

LED Type:	14W COB
Lumen Output (High/Mid/Low):	1400/700/350lm
Operating Time High/Mid/Low:	2/5/10hr
Charging Time:	4hr
Length:	125mm
IP Rating:	IP65
Battery:	3.7V 5.2Ah Li-ion
Model No:	Colour:
F LED1400P	Green
G LED1400PR	Red



A 12 SMD & 1W SMD LED Rechargeable Slim Inspection Lights
Model No. LED180

Slimline foldout inspection light for use in confined spaces, with 6mm minimum thickness. Inspection arm can be rotated 180° and folded back for use as a hands-free inspection lamp. Features 12 SMD LEDs which produce up to 400 lumens, operated by a rolling dimmer switch, and a 1W SMD LED in the end for use as a directional torch. Suitable for hands-free operation with three magnets and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Powered by a 3.7V 2Ah rechargeable Li-ion battery which lasts up to 8 hours. Supplied with USB charging lead.

LED Type:	12 SMD + 1W SMD
Lumen Output (Side/Top):	400lm/70lm
Operating Time (Side/Top):	3/8hr
Charging Time:	3hr
Minimum Length:	155mm
Maximum Length:	300mm
IP Rating:	IP20
Battery:	3.7V 2Ah Li-ion



B 12 SMD & 1W SMD LED Rechargeable Slim Folding Inspection Lights
Model No. LED1801

Slimline foldout inspection light for use in confined spaces, with 6mm minimum thickness. Inspection arm can be rotated 180° and folded back for use as a hands-free inspection lamp. Features 12 SMD LEDs which produce up to 500 lumens, operated by a rolling dimmer switch, and a 1W SMD LED in the end for use as a directional torch. Suitable for hands-free operation with three magnets and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Can be charged in a Sealey docking station - LED1801K (not included). Powered by a 3.7V 2.6Ah rechargeable Li-ion battery which lasts up to 8 hours. Supplied with USB charging lead.

LED Type:	12 SMD + 1W SMD
Lumen Output (Side/Top):	500/70lm
Charging Time:	4hr
Operating Time (Side/Top):	3/8hr
Maximum Length:	300mm
Minimum Length:	155mm
IP Rating:	IP20
Battery:	3.7V 2.6Ah Li-ion



C Rechargeable Floodlight/Inspection Light Docking Station Kit
Model No. LED1801K

Docking station kit includes 2 x LED1801 and charging station. Each inspection lamp has 12 x SMD LEDs (side) + 1 x SMD LED (top) producing up to 500 lumens. When both inspection lamps are docked it can be used as a floodlight with two light options 50% and 100% producing 500 or 1000 lumens. Each inspection lamp can extend and is able to rotate 180° making it easy to direct the light. Two charging points with individual LED charging level indicators. Includes 5V-2A mains adaptor and 1m USB charging cable.

LED Type:	12 SMD + 1 SMD (x2)
Lumen Output (Side/Top):	1000/140lm
Charging Time:	4hr
Operating Time (Side/Top):	3/8hr
IP Rating:	IP20
Battery:	2 x 3.7V 2.6Ah Li-ion





A 360° 12V COB LED Inspection Light Body Only

Model No. **LED36012V**

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. Each lamp houses a super bright COB LED providing up to 1000 lumens output with 120° spread of light, illuminating the whole work area. CRI 80+ with brightness of 6500K. Features swivel hook and a super strong magnet on the base, which allow hands-free operation. Requires Model No. CP1200BP 12V 1.5Ah Lithium-ion Power Tool Battery and Model No. CP1200MC 12V Lithium-ion Battery Charger.

LED Type:	8W COB
Lumen Output:	1000lm
Charging Time:	12V 1.5Ah Li-Ion 60min, 12V 3Ah Li-Ion 105min, 12V 4Ah Li-Ion 140min (not included)
IP Rating:	IP20/IK07
Minimum Length:	Without Battery: 202mm, With Battery: 223mm
Maximum Length:	Without Battery: 223mm, With Battery: 243mm
Battery:	CP1200BP - 12V 1.5Ah Li-Ion, CP1200BP3 - 12V 3Ah Li-Ion, CP1200BP4 - 12V 4Ah Li-Ion (not included)



B LED36012V & Battery and Charger Combo
Model No. **LED36012VCOMBO1**

Model No:	Description:
LED36012V	360° 12V Lithium-ion COB LED Inspection Lamp - Body Only
CP1200BP	12V 1.5Ah Lithium-ion Power Tool Battery for SV12 Series
CP1200MC	12V Lithium-ion Battery Charger for SV12 Series



C 3pc SMD LED Strip Lighting

Model No. **LEDSTR03**

Linkable LED strip lights with PIR and CDS sensor. The sensor only works in dark (illuminance ≤10-20 LUX). The PIR and CDS sensor can be set to two modes, 30 seconds and 1 minute before turning off. This allows you to leave the light on when not in use and it will turn off after the set period when no movement is detected. Each strip features 6 SMD LEDs and can be linked to up to five strips. Each pack includes two corner extensions, one cover for the end of the strip and six metal clips with option of using the included screws or adhesive strips to attach to almost any surface. USB powered and can be used with the battery case supplied (4 x AAA batteries not included) which can also be mounted using the bracket supplied, any 5V=1A/2A power bank or a 5V=1A/2A USB plug adaptor.

LED Type:	0.6W x 3 SMD
Lumen Output:	150lm
Operating Time:	4hr
Length (L x W x D):	306 x 8.44 x 6.80mm Per Strip
Battery:	4 x AAA (not included)



D Interchangeable 3-in-1 COB LED Rechargeable Inspection Light

Model No. **LED0131R**

Innovative 3-in-1 work light. Threaded interface enables user to change between 1000 lumen torch with sliding focus, 450 lumen work light and a 300 lumen flexi-head. Features a power indicator on the switch and a magnet on the base for hands-free operation. Supplied in a presentation box with a high quality USB cable.

LED Type:	Osram P8 5W LED + 5W COB + 10W SMD
Lumen Output:	COB: 450lm, Flexi-Head Light: 300lm, Torch: 1000lm
Charging Time:	7hr
Operating Time:	(High): Flexi-Head Light - 11hrs, COB - 4.2hr, Flashlight - 3.3hr
IP Rating:	IPX4
Battery:	3.7V 2200mAh Li-ion





Li-Polymer RECHARGEABLE
DAYLIGHT EFFECT CRI 80
COB LED

A - E 360° 3W COB & 1W SMD LED Rechargeable Inspection Lights
Model No. SEE RIGHT

Mini, lightweight lamps with exclusive patented design owned by and registered to Sealey. Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Featuring a super bright 3W COB LED light source, which gives an even and constant spread of light. Produces up to 300 lumens with a CRI-80 rating. Recessed lens for added protection, 1W High power LED directional torch located on top of the lamp, produces up to 100 lumens. Rubber covered magnet in base and swivel hook for hands-free operation. High quality rechargeable 3.7V 1.5Ah Li-Polymer battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Micro USB charging port. Supplied with USB cable.

300 LUMENS
WEB VIDEO
PATENTED DESIGN EXCLUSIVE TO SEALEY

LED Type:	3W COB + SMD
Lumen Output Side/Top:	300/100lm
CRI Rating Side:	80
Operating Time Side/Top:	3/6hr
Charging Time:	3hr
IP Rating:	IP20
Minimum Length:	160mm
Maximum Length:	170mm
Battery:	3.7V 1.5Ah Li-Poly

Model No:	Colour:
A LED3601R	Red
B LED3601	Black
C LED3601G	Green
D LED3601BA	Brushed Aluminium
E LED3601CF	Carbon Fibre



Micro USB charging port.

Rubber covered magnetic base.

Hanging hook.

450 LUMENS
WEB VIDEO
PATENTED DESIGN EXCLUSIVE TO SEALEY
CRI 96

Li-Polymer RECHARGEABLE COB LED



Battery life indicator.

F Rechargeable 360° Inspection Light COB LED Colour Match CRI 96 - 3 Colour
Model No. LED360CM

Hand-held rechargeable inspection lamp with a high Colour Rendering index (CRI 96) suitable for accurate colour matching. The light produced by the COB LED is ideal for detecting swirls and differences in paint colour when touching up areas of bodywork. Single button features three colour options to choose from - 2700k, 4500k and 6500k producing 450 lumens. Fitted with a patented magnetic 360° swivel base and hanging hook for hands-free operation. Features a LED battery level indicator and light is powered by a high quality 3.7V 2.6Ah Li-Ion battery. Supplied with micro USB lead.

LED Type:	COB
Lumen Output:	450lm
CRI Rating:	96
Operating Time (High/Low):	2hr
Charging Time:	4hr
IP Rating:	IP65
Battery:	3.7V/2600mAh Li-Ion

Colour Match



A-G 360° 7 SMD & 3W SMD LED Rechargeable Inspection Lights
Model No. SEE RIGHT

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Seven super bright SMD LEDs with magnified lens providing up to 400 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. High quality 2.2Ah Lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Micro USB charging port. Supplied with USB cable.

LED Type:	7 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(400/200)/120lm
Operating Time Side(High/Low)/Top:	(3/7)/8hr
Charging Time:	3.5hr
IP Rating:	IP54
Minimum Length:	255mm
Maximum Length:	270mm
Battery:	3.7V 2.2Ah Li-ion

Model No:	Colour:
A LED3602R	Red
B LED3602	Black
C LED3602G	Green
D LED3602B	Blue
E LED3602Y	Yellow
F LED3602BA	Brushed Aluminium
G LED3602CF	Carbon Fibre



H-J 360° 14 SMD & 3W SMD LED Lithium-ion Rechargeable Inspection Lights
Model No. SEE BELOW

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Each lamp houses 14 super bright SMD LEDs providing up to 600 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. High quality 2.6Ah Lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Features a micro USB charging port and supplied with USB charging lead.

LED Type:	14 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(600/200)/120lm
Operating Time Side(High/Low)/Top:	(3/8)/8hr
Charging Time:	3.5hr
IP Rating:	IP54
Minimum Length:	260mm
Maximum Length:	280mm
Battery:	3.7V 2.6Ah Li-Ion

Model No:	Colour:
H LED360	Black
I LED360G	Green
J LED360R	Red

700 LUMENS
LITHIUM RECHARGEABLE
SMD LED



3W LED directional torch.



LED battery life indicator. Micro USB charger port.

A - C 360° 16 SMD & 3W SMD LED Rechargeable Inspection Lights
Model No. SEE BELOW

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Includes two 3.7V 2.6Ah rechargeable Lithium-ion batteries in parallel for up to 15 hours run time. Each lamp houses 16 SMD LEDs providing up to 700 lumens output and a 120° spread of light, illuminating the whole work area. Includes an additional 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Supplied with USB lead, mains plug and in-car charger.



THE 360°



C



LED Type:	16 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(700/350)/150lm
Operating Time Side(High/Low)/Top:	(6/12)/15hr
Charging Time:	7hr
Minimum Length:	256mm
Maximum Length:	276mm
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-Ion (x2)

Model No:	Colour:
A LED360PLUS	Black
B LED360PLUSG	Green
C LED360PLUSR	Red



1000 LUMENS



1000 LUMENS

LITHIUM RECHARGEABLE
SMD LED



THE 360°

D - E 360° 24 SMD & 3W SMD LED Rechargeable Inspection Lights
Model No. SEE BELOW

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Features 24 super bright SMD LEDs with magnified lens providing up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Two high quality 3.7V 2.6Ah Lithium-ion batteries in parallel for up to 15 hours run time. Micro USB charging port. Supplied with USB cable.

LED Type:	24 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(1000/300)/150lm
Operating Time Side(High/Low)/Top:	(3/12)/15hr
Charging Time:	7hr
IP Rating:	IP54
Minimum Length:	256mm
Maximum Length:	276mm
Battery:	3.7V 2.6Ah Li-Ion (x2)

Model No:	Colour:
D LED3606G	Green
E LED3606R	Red



A - B 360° 36W SMD LED Rechargeable Portable Floodlights
Model No. **SEE BELOW**

Features patented 360° swivel and tilt function enabling light source to be positioned in any direction. Work light houses 72 super bright SMD LEDs providing up to 3000 lumens. Features high quality 4.4Ah Lithium-ion battery with battery level indicator and includes a 2.1A USB output for use as a powerbank. Supplied with mains charger.

LED Type:	72 SMD
Power:	36W
Lumen Output (High/Medium/Low):	3000/1500/750lm
Operating Time (High/Medium/Low):	1.5/2.5/5hr
Colour Temperature:	6500K
Charging Time:	4.5hr
IP Rating:	IP65
Battery:	7.4V 4.4Ah Li-ion

Model No:	Colour:
A LED360FG	Green
B LED360FR	Red



C 360° 7 SMD & 1W SMD LED Rechargeable Mini Penlight
Model No. **LED3607G**

Unique and innovative 360° swivel ball joint function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. Each lamp houses seven super bright SMD LEDs providing up to 200 lumens output. Illuminating the whole work area. Includes an additional high power 1W LED in the end for use as a directional torch. Features a belt clip with integrated magnet on the back of the light and a strong magnet on the bottom which allow hands-free operation. High quality 1.1Ah Lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Micro USB charging port. Supplied with charging lead.

LED Type:	7 SMD + 1W SMD
Lumen Output (Side/Top):	200lm/80lm
Operating Time:	2.5/5hr
Charging Time:	3hr
Battery:	3.7V 1.1Ah Li-ion



The 360° Family consists of seven styles of inspection lamp. All of the lamps feature our unique and innovative 360° swivel and tilt function enabling the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey.



D - G 360° 16 SMD & 1W SMD LED Rechargeable Inspection Lights
Model No. **SEE BELOW**

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Each lamp houses 16 super bright SMD LEDs providing up to 600 lumens through the adjustable rotary switch and a 1W LED directional torch. Slimline design with minimum thickness of 8mm. Features a single hanging hook, magnetic base allowing hands-free operation and battery level indicator. High quality 2.6Ah 3.7V Lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Supplied with a high quality braided USB lead. Model No. LED3604UV includes a four LED UV light, with 7hr operating time.



LED Type:	16 SMD + 1W SMD
Lumen Output Side (High/Low)/Top:	(600/50)/120lm
Operating Time Side (High/Low)/Top:	(1.5/16)/10hr
Charging Time:	4hr
IP Rating:	IP54
Minimum Length:	390mm
Maximum Length:	400mm
Battery:	3.7V 2.6Ah Li-ion

Model No:	Colour:
D LED3604UV	Blue (Ultraviolet)
E LED3604G	Green
F LED3604	Black
G LED3604R	Red



New wireless charging feature allows for effortless charging while storing the torches when not in use.

B NEW

500 LUMENS



B 5W COB & 3W SMD LED Inspection Light Wireless Rechargeable
Model No. LEDWC02

Heavy-duty inspection lamp with dimming function. Supplied with one strong magnet on the base and two on the back. Lumen output on side lamp 50-500lm with dimming function and 300lm on top light. Operating time is 3-10hr on side lamp and 5hr on the top light. Charging time is 5hr. Includes LED indicator for level of charge on the front of the torch. Charger not included, compatible with Model No's WCB1 and WCB2 Wireless Charging Bases.

LED Type:	5W COB + 3W SMD
Lumen Output (Side/Top):	50-500/300lm
Operating Time (Side/Top):	3-10/5hr
Charging Time:	5hr
IP Rating:	IP68
Battery:	3.7V 2600mAh

D NEW

NEW



D 5V-2A Double Wireless Charging Base
Model No. WCB2

Double wireless charging base fitted with two strong magnets for attaching to a metal surface. Four holes at each corner for permanent fixture to non-metallic surface or wall. Charges both Model No's LEDWC01 and LEDWC02 Wireless Rechargeable Inspection Lamps. Supplied with USB charging cable and 5V-2A charging adaptor.

Input Voltage:	5V-2A
Output:	1A

A NEW

NEW

300 LUMENS



A 3W COB & 1W SMD LED Inspection Light Wireless Rechargeable
Model No. LEDWC01

Heavy-duty inspection lamp with dimming function. Supplied with one strong magnet on the base and two on the back. Lumen output on side lamp 30-300lm with dimming function and 100lm on top light. Operating time 2-10hr on side lamp and 5.5hr on the top light. Charging time is 2.5hr. Includes LED indicator for level of charge on the front of the torch. Charger not included, compatible with Model No's WCB1 and WCB2 Wireless Charging Bases.

LED Type:	3W COB + 1W SMD
Lumen Output (Side/Top):	30-300/100lm
Operating Time (Side/Top):	2-10/5.5hr
Charging Time:	2.5hr
IP Rating:	IP68
Battery:	3.7v 1200mAh

C NEW

NEW



C 5V-1A Single Wireless Charging Base
Model No. WCB1

Single wireless charging base fitted with two strong magnets for attaching to a metal surface. Four holes at each corner for permanent fixture to non-metallic surface or wall. Charges both Model No's LEDWC01 and LEDWC02 Wireless Rechargeable Inspection Lamps. Supplied with USB charging cable and 5V-1A charging adaptor.

Input Voltage:	5V-1A
Output:	1A



A NEW

Wireless Charging

A 3W Inspection Light & Single Wireless Charging Base
Model No. LEDWCOMB01

For full specification see page 930.

Model No:	Description:
LEDWC01	3W COB + 1W SMD LED Inspection Lamp Wireless Rechargeable
WCB1	5V-1A Single Wireless Charging Base



A



D



B NEW

Wireless Charging

B 5W Inspection Light & Single Wireless Charging Base
Model No. LEDWCOMB02

For full specification see page 930.

Model No:	Description:
LEDWC02	5W COB + 3W SMD LED Inspection Lamp Wireless Rechargeable
WCB1	5V-1A Single Wireless Charging Base



C NEW

Wireless Charging

C 3W Inspection Light (x2) & Double Wireless Charging Base
Model No. LEDWCOMB03

For full specification see page 930.

Model No:	Description:
LEDWC01	3W COB + 1W SMD LED Inspection Lamp Wireless Rechargeable (x2)
WCB2	5V-2A Double Wireless Charging Base



D NEW

Wireless Charging

D 5W Inspection Light, 3W Inspection Light & Double Wireless Charging Base
Model No. LEDWCOMB04

For full specification see page 930.

Model No:	Description:
LEDWC01	3W COB + 1W SMD LED Inspection Lamp Wireless Rechargeable
LEDWC02	5W COB + 3W SMD LED Inspection Lamp Wireless Rechargeable
WCB2	5V-2A Double Wireless Charging Base



E NEW

Wireless Charging

E 5W Inspection Light (x2) & Double Wireless Charging Base
Model No. LEDWCOMB05

For full specification see page 930.

Model No:	Description:
LEDWC02	5W COB + 3W SMD LED Inspection Lamp Wireless Rechargeable (x2)
WCB2	5V-2A Double Wireless Charging Base



F NEW

Wireless Charging

F 3W Inspection Light & Double Wireless Charging Base
Model No. LEDWCOMB06

For full specification see page 930.

Model No:	Description:
LEDWC01	3W COB + 1W SMD LED Inspection Lamp Wireless Rechargeable
WCB2	5V-2A Double Wireless Charging Base



G NEW

Wireless Charging

G 5W Inspection Light & Double Wireless Charging Base
Model No. LEDWCOMB07

For full specification see page 930.

Model No:	Description:
LEDWC02	5W COB + 3W SMD LED Inspection Lamp Wireless Rechargeable
WCB2	5V-2A Double Wireless Charging Base



A 8W LED Rechargeable Inspection Light Display Box of 12
Model No. LED1001DB

Smooth 90° flex with additional 360° twist function enables the light source to be positioned in any direction. Super bright COB LED provides up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 1W LED directional torch. Features a swivel hanging hook and rubber covered magnet on the base, which allow hands-free operation. Two high quality 2.6Ah Lithium-ion batteries for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Type-C USB charging port. Supplied with Type-C USB cable.



UP TO 300 LUMENS
RECHARGEABLE
COB LED

D LED3601 Series - Display Box of 12
Model No. LED3601COMBO

For full specification see page 926.

Model No:	Colour:	Qty:
LED3601	Black	4
LED3601G	Green	4
LED3601R	Red	4



B 8W COB & 1W SMD LED Rechargeable Inspection Light
Model No. LED1001

Smooth 90° flex with additional 360° twist function enables the light source to be positioned in any direction. Super bright COB LED provides up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 1W LED directional torch. Features a swivel hanging hook and rubber covered magnet on the base, which allow hands-free operation. Two high quality 2.6Ah Lithium-ion batteries for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Type C charging port. Supplied with Type C USB cable.

LED Type:	8W COB + 1W SMD
Lumen Output Side(High/Low)/Top:	(1000/500)/100lm
Length:	240mm
Operating Time Side(High/Low)/Top:	(2/4)/16hr
Charging Time:	5hr
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-Ion (x2)



E 2W COB LED Rechargeable Head Torch with Auto-Sensor - Display Box of 12
Model No. LED360HTDB

Display box includes 4 x Green, 4 x Red and 4 x Black models. New design 360° multi-function COB LED rechargeable head torch. Headband can also be used as a wristband. Band can be removed giving you a work light with a clip which can be clipped to many objects like a baseball cap. Will also stand by itself sturdy as a table light. One button includes five different lighting options. First press is 100% white light, second dims to 40% white light, third is red warning light (1W COB LED) and fourth is red warning flash, which makes it ideal for cycling. Holding the button enables auto-sensor function to switch on/off just by waving hand in front. Adjustable head/wristband and foam brow for added comfort. Powered by 3.7V 0.5Ah Li-Poly battery. Supplied with micro USB charging cable.

LED Type:	2W COB
Lumen Output (High/Low):	160/60lm
Operating Time (High/Low):	2.5/4hr
Charging Time:	1.5hr
Battery:	3.7V 0.5Ah Li-Poly



C 6 SMD LED Magnetic Flexi-Head Pocket Light - Display Box of 6
Model No. LED051DB

Flexible head bends and holds position to allow bright illumination in confined spaces. Two brightness settings of 100 or 70 lumens. Features a magnet in the end for hands-free use. Display box of six.

LED Type:	6 SMD
Lumen Output (High/Low):	100/70lm
Operating Time (High/Low):	4/5hr
Battery:	3 x AAA (supplied)



See page 935 for full specification.

F 10W COB LED Rechargeable Torch with Wireless Speaker - Display Box of 10
Model No. LED50WSDB

Supplied with built-in high quality wireless speaker which can easily be connected to your smartphone or tablet to play music. Rubber coated housing with recessed hook and integral 90° adjustable stand. Battery charge level indicator on the back. Main light has an on/off power button when pressed multiple times cycles through two levels of brightness, 500lm and 250lm with a runtime of 4.5hr/12hr. Light produces a beam distance of up to 50m. IPX4 Waterproof. IK08 Impact rated to withstand falls of up to 1m. Charging time 6hr. Light and speakers can be used whilst charging. Supplied with USB cable.

LED Type:	10W COB
Lumen Output (High/Low):	500/250lm
Operating Time (High/Low):	4.5/12hr
Charging Time:	6hr
Length:	160mm
IP Rating:	IPX4
Battery:	3.7V 3Ah Li-Ion

A - C Rechargeable Inspection Light Display Boxes Model No. SEE BELOW

Display boxes of our popular LED360 range of inspection lamps. Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. Each lamp houses super bright SMD LEDs providing up to 700 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. High quality Lithium-ion batteries for longer life. Micro USB charging port. For full details see pages 926 to 928.

A LED360 Series Display Box of 24 Model No. LED360COMBO2

Model No:	Colour:	Qty:
LED360	Black	8
LED360G	Green	8
LED360R	Red	8

B LED3602 Series Display Box of 24 Model No. LED3602COMBO1

Model No:	Colour:	Qty:
LED3602	Black	4
LED3602G	Green	4
LED3602R	Red	4
LED3602Y	Yellow	4
LED3602B	Blue	4
LED3602BA	Brushed Aluminium Effect	4

C LED360PLUS Series Display Box of 24 Model No. LED360PLUSCOM

Model No:	Colour:	Qty:
LED360PLUS	Black	8
LED360PLUSG	Green	8
LED360PLUSR	Red	8



Model No.	LED360 Series:	LED3602 Series:	LED360PLUS Series:
LED Type:	14 SMD + 3W SMD	7 SMD + 3W SMD	16 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(600/200)/120lm	(400/200)/120lm	(700/300)/150lm
Operating Time Side(High/Low)/Top:	(3/6)/8hr	(3/7)/8hr	(6/12)/15hr
Charging Time:	3.5hr	3.5hr	7hr
IP Rating:	IP54	IP54	IP54
Minimum Length:	260mm	255mm	256mm
Maximum Length:	280mm	270mm	276mm
Battery:	3.7V 2.6Ah Li-ion	3.7V 2.2Ah Li-ion	3.7V 2.6Ah Li-ion (x2)





A - B COB LED Rechargeable Portable Floodlights - Fold Flat
Model No. **SEE BELOW**

COB LED work lights. Two brightness settings plus SOS and flash modes. Durable folding frame makes for easy storage. Micro USB input and USB output both 5V 1A with power indicator light. Supplied with 1m micro USB charging cable.

	A	B
Model No:	LEDFL10W	LEDFL20W
LED Type:	10W COB	20W COB
Lumen Output (High/Low):	750/375lm	1600/800lm
Operating Time (High/Low):	2.5/5hr	2/4hr
Charging Time:	4hr	6hr
Collapsed Size:	215 x 180 x 38mm	240 x 230 x 38mm
IP Rating:	IP67	IP67
Battery:	3.7V 2.2Ah Li-ion	3.7V 4.4Ah Li-ion



C 20W COB LED Lithium-ion Rechargeable Floodlight - Colour Matching CRI 96
Model No. **LED068**

Rechargeable professional floodlight with super bright COB LED which gives an even and constant spread of light. Five colour temperature options, 2700K, 3500K, 4500K, 5500K and 6500K. Produces a light with a CRI (Colour Rendering Index) of 96, which gives a daylight effect. Ideal for detecting swirls and differences in paint colour when touching up areas of bodywork. Three settings allow for 25, 50 or 100% brightness to suit task. Features a 180° adjustable stand and a five LED battery level indicator. Supplied with quick release charging lead.

LED Type:	20W COB
Lumen Output (High/Low):	2000/1000/500lm
Operating Time (High/Low):	2/4/8hr
Charging Time:	3.5hr
CRI Rating:	96
IP Rating:	IP65
Battery:	11.1V 4.4Ah Li-ion



D - E SMD LED Rechargeable Portable Floodlights - Fold Flat
Model No. **SEE BELOW**

Innovative swivel function enables floodlights to rotate 360° and fold flat. Floodlight houses super bright SMD LEDs with 110° spread of light. High quality Lithium-ion battery for longer life and a much slower discharge than traditional NI-MH batteries. Supplied with mains charger.

	D	E
Model No:	LED170	LED171
LED Type:	20 SMD	36 SMD
Power:	10W	20W
Lumen Output (High/Low):	600/300lm	1200/600lm
Operating Time (High/Low):	2.2/4.4hr	2.2/4.4hr
Charging Time:	4.5hr	4.5hr
IP Rating:	IP44	IP44
Battery:	7.4V 2.6Ah Li-ion	7.4V 5.2Ah Li-ion



F 30 SMD LED Rechargeable Portable Floodlight
Model No. **LED109C**

Portable floodlight with adjustable head, housed within a stable steel frame. Features 30 super bright SMD LEDs, giving a full 120° spread of light. Weatherproof design with an on/off rocker switch and two light settings. Built-in 7.4V 4Ah Lithium-ion rechargeable battery. Supplied with a 3-pin UK plug, mains charger and 12V in-car charger. Suitable for lighting workshops, garages and other environments where no mains supply is available.

LED Type:	30 SMD
Lumen Output (High/Low):	1000/400lm
Operating Time (High/Low):	3.5/8hr
Charging Time:	5hr
Battery:	7.4V 4Ah Li-ion

A NEW

COB LED

Wireless

Music

500 LUMENS



B NEW



1100 LUMENS
COB LED

Music

Wireless



C NEW



RECHARGEABLE

3500 LUMENS

Auto EXPRESS RECOMMENDS

C 3500lm Super Boost Rechargeable Osram P9 LED 30W Pocket Light

Model No. **LED451**

Triple Osram P9 LED 10W produces extremely bright, white light with an output of 1400 lumens, with a 'super boost' output of 3500lm for 35 seconds. Working range up to 250m. Powered by a rechargeable 3.7V 2Ah Li-ion battery. Supplied with micro USB charging lead. ***WARNING*** Please keep out of reach of children, as lens generates heat on 'super boost' setting.

LED Type:	3 x 10W Osram P9 LED
Lumen Output:	Super Boost: 3500lm for 35 seconds; High: 1400lm
Operating Time:	Super Boost for 35 seconds + High; 1.2hr, Low; 10hr
Charging Time:	4-5hr
Range:	250m
Battery:	3.7V 2Ah Li-ion

D Rechargeable Wireless Sound Bar

Model No. **SB1**

Stylish and modern sound bar is finished in anthracite grey. Plays your favourite music easily from your smartphone or tablet by wireless technology, AUX in via an AUX cable (1m AUX cable supplied) or can play MP3 files via micro SD card. (Micro SD not included). Two channel sound bar includes a pair of 2" speakers and one vibrating diaphragm for added sound quality. Base is mounted on two sturdy feet with high grip foam pads which helps dampen any vibration. Charges from a USB cable (USB cable included).

Battery:	3.7V 1.5Ah Li-Ion
Charging Time:	2hr
Dimensions (W x D x H):	428 x 57 x 64mm
Speaker Output:	RMS: 6W
Battery:	3.7V 1.5Ah

A



B 20W COB LED Rechargeable Floodlight with Wireless Speakers & Power Bank

Model No. **LED100WS**

3-in-1 Function floodlight made of a strong nylon plastic with thermoplastic rubber edges for durability. Features an ultra bright 20W COB LED light producing up to 1100 lumens with three light settings: High 1100lm, Mid 580lm, Low 350lm (working time: 3, 5 and 15 hours respectively). Work light also includes two good quality wireless speakers which can be easily linked to your tablet or smartphone. Fixed to the rear is a sturdy 180° adjustable stand which can also be used as a carry handle. Has four strong magnets on the back for easy mounting to metal applications such as a tool chest. Built-in power bank with a USB output and LED charge indicator. Micro USB charging lead included.

LED Type:	20W COB
Lumen Output:	350/580/1100lm
Running Time (Minimum):	3-15hr
Charging Time:	8hr
Speaker Output:	80dB
Battery:	3.7V 8Ah Li-poly

A 10W COB LED Rechargeable Torch with Wireless Speaker

Model No. **LED50WS**

Supplied with built-in high quality wireless speaker which can easily be connected to your smartphone or tablet to play music. Rubber coated housing with recessed hook and integral 90° adjustable stand. Battery charge level indicator on the back. Main light has an on/off power button when pressed multiple times cycles through two levels of brightness, 500lm and 250lm with a runtime of 4.5hr/12hr. Light produces a beam distance of up to 50m. IPX4 Protection, water-resistant. IK08 Impact rated to withstand falls of up to 1m. Charging time 6hr. Light can be used whilst charging. Supplied with USB cable.

LED Type:	10W COB
Lumen Output (High/Low):	500/250lm
Operating Time (High/Low):	4.5/12hr
Charging Time:	6hr
Length:	160mm
IP Rating:	IPX4
Battery:	3.7V 3Ah Li-ion

D NEW

RECHARGEABLE



Wireless

Music

A-C
230V



10W
50W 70W
SMD LED

D-F
110V



20W
50W 70W
SMD LED

A-C SMD LED Portable Floodlights
Model No. SEE BELOW

Portable floodlights in die-cast aluminium housing with stand. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Supplied with 3-pin plug.

	A	B	C
Model No:	LED090	LED094	LED096
Power:	10W	50W	70W
LED Type:	SMD	SMD	SMD
Lumen Output:	800lm	3800lm	5600lm
Supply:	230V	230V	230V
Colour Temperature:	6000K	6000K	6000K
IP Rating:	IP54	IP54	IP54

D-F SMD LED Portable Floodlights - 110V
Model No. SEE BELOW

Portable floodlights in die-cast aluminium housing with stand. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Supplied with power cable and 16A 110V plug.

	D	E	F
Model No:	LED093	LED095	LED097
Power:	20W	50W	70W
LED Type:	SMD	SMD	SMD
Lumen Output:	1600lm	3800lm	5600lm
Supply:	110V	110V	110V
Colour Temperature:	6000K	6000K	6000K
IP Rating:	IP54	IP54	IP54

G
700 LUMENS
10W



H
1400 LUMENS
20W



SMD LED

SMD LED

Li-Ion RECHARGEABLE

G-H SMD LED Rechargeable Portable Floodlights
Model No. SEE TABLE

Portable, rechargeable, constant current floodlights, with replaceable battery pack. Die-cast aluminium housing with integral stand. SMD LED technology allows ultra-bright illumination, providing an even spread of light across a 110° angle. Features battery level indicator. Model No. LED085 also features a 5V/1A USB output for charging electronic devices. Supplied with mains charger.



	G	H
Model No:	LED084	LED085
Power:	10W	20W
LED Type:	SMD	SMD
Lumen Output:	700lm	1400lm
Colour Temperature:	6000K	6000K
Battery:	11.1V 2.2Ah Li-Ion	11.1V 4.4Ah Li-Ion
Operating Time:	3hr	3hr
Charging Time:	2.5-3hr	2.5-3hr
IP Rating:	IP54	IP54
USB Output:	n/a	5V - 1A
Replacement Battery:	n/a	LED085B



A - B 110V SMD LED Site Lights

Model No. **SEE BELOW**

Heavy-duty robust design with integral carry handle and 180° stand for positioning of light and substantial stability. SMD LED technology site lights for ultra-bright illumination. Simple on/off weatherproof switch on reverse of lights. Cable strap to keep cable tidy when not in use. Cable gland fitted to entry of the light to provide good protection of the cable. Supplied with 110V 16A plug.

	A	B
Model No:	LED24110	LED48110
Power:	24W	48W
LED Type:	SMD	SMD
Lumen Output:	2500lm	5000lm
Colour Temperature:	5700K	5700K
IP Rating:	IP65	IP54



C 2 x 20W Rechargeable Fluorescent Floor Light
Model No. **ML18/36**

Twin daylight fluorescent tubes suitable for applications where mains power is unavailable. Tubes can be selected to run individually or as a pair from rechargeable cells. Includes an integrally stored mains cable for recharging only, electronic control allows unit to be used as an emergency light, switching on the light in the event of mains power failure. Features carry handle, floor stand and can also be wall mounted.

Power:	2 x 20W
Tube Length:	590mm
Supply:	230V
Operating Time:	1 Tube: 3hr, 2 Tubes: 1.5hr
Charging Time:	20hr
Replacement Tube:	003-SD1824D
Battery:	6V 4.5Ah



D - E 230V SMD LED Site Lights
Model No. **SEE BELOW**

Heavy-duty robust design with integral carry handle and 180° stand for positioning of light and substantial stability. SMD LED technology site lights for ultra-bright illumination. Model No LED48230 features 2 x 13A power sockets on reverse of lamp allowing other power tools to be used. Simple on/off weatherproof switch on reverse of lights. Cable strap to keep cable tidy when not in use. Cable gland fitted to entry of the light to provide good protection of the cable. Supplied with 3-pin plug.

	D	E
Model No:	LED24230	LED48230
Power:	24W	48W
LED Type:	SMD	SMD
Lumen Output:	2500lm	5000lm
Colour Temperature:	5700K	5700K
IP Rating:	IP65	IP54



A-D NEW

230V

SMD LED



- 20W
- 50W
- 70W
- 100W

2 YEAR GUARANTEE*

A-D SMD LED Extra Slim Floodlights with Wall Bracket
Model No. **SEE BELOW**

Mounted in die-cast powder coated aluminium extra slim housing with wall bracket. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Supplied with power cable only and suitable for outdoor mounting.

	A	B	C	D
Model No:	LED112	LED113	LED114	LED115
Power:	20W	50W	70W	100W
LED Type:	SMD	SMD	SMD	SMD
Lumen Output:	1700lm	4500lm	5600lm	8500lm
Supply:	230V	230V	230V	230V
Colour:	3000K, 4000K and 6000K	3000K, 4000K and 6000K	3000K, 4000K and 6000K	3000K, 4000K and 6000K
IP Rating:	IP65	IP65	IP65	IP65

E-H NEW

230V

SMD LED



- 20W
- 50W
- 70W
- 100W

2 YEAR GUARANTEE*

E-H SMD LED Extra Slim Floodlights with PIR Sensor
Model No. **SEE BELOW**

Mounted in die-cast powder coated aluminium extra slim housing with wall bracket. SMD LED technology allows ultra bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Features a PIR motion detector. Supplied with power cable only and suitable for outdoor mounting.

	E	F	G	H
Model No:	LED112PIR	LED113PIR	LED114PIR	LED115PIR
Power:	20W	50W	70W	100W
LED Type:	SMD	SMD	SMD	SMD
Lumen Output:	1700lm	4500lm	5600lm	8500lm
Supply:	230V	230V	230V	230V
Colour:	3000K, 4000K and 6000K	3000K, 4000K and 6000K	3000K, 4000K and 6000K	3000K, 4000K and 6000K
IP Rating:	IP44	IP44	IP44	IP44

I

230V

10W

800 LUMENS

SMD LED



J

110V

10W

800 LUMENS

SMD LED



K

110V

20W

1600 LUMENS

SMD LED



I - K SMD LED Telescopic Floodlights
Model No. **SEE BELOW**

Mounted in an extra slim, die-cast aluminium housing with foldaway tripod legs. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 120° angle. Supplied with 3-pin 230V or 16A 110V plug. Twin light models feature removable head, allowing freestanding use.

	I	J	K
Model No:	LED098	LED099	LED103
Power:	10W	10W	20W
LED Type:	SMD	SMD	SMD
Lumen Output:	800lm	800lm	1600lm
Min./Max. Height:	0.61/1.6m	0.61/1.6m	0.61/1.6m
Colour Temperature:	6000K	6000K	6000K
IP Rating:	IP54	IP54	IP54
Supply:	230V	110V	110V

L

NEW

4800 LUMENS
230V
60W
COB LED



L 60W COB Folding Floodlight & Stand
Model No. **LED192TCOMBO1**

Model No:	Description:
LED192T	60W COB Folding Floodlight
LED193ST	Telescopic Stand for Folding Floodlight



A NEW



USB

150 LUMENS

SMD LED 4 x AAA Batteries

A 3pc SMD LED Strip Lighting
Model No. **LEDSTR03**

Linkable LED strip lights with PIR and CDS sensor. The sensor only works in dark (illuminance $\leq 10-20$ LUX). The PIR and CDS sensor can be set to two modes, 30 seconds and 1 minute before turning off. This allows you to leave the light on when not in use and it will turn off after the set period when no movement is detected. Each strip features six SMD LED's and can be linked to up to five strips. Each pack includes two corner extensions, one cover for the end of the strip and six metal clips with option of using the included screws or adhesive strips to attach to almost any surface. USB powered and can be used with the battery case supplied (4 x AAA batteries not included) which can also be mounted using the bracket supplied, any 5V=1A/2A power bank or a 5V=1A/2A USB plug adaptor.

LED Type:	0.6W x 3 SMD
Lumen Output:	150lm
Operating Time:	4hr
Length (L x W x D):	306 x 8.44 x 6.80mm Per Strip
Battery:	4 x AAA (not included)



B



SMD LED 150 LUMENS WEB VIDEO

B 15 SMD LED Rechargeable Magnetic Toolbox Light
Model No. **TBL450**

Robust aluminium housing incorporating 15 SMD LEDs to illuminate the trays in a toolbox. With a width of 450mm the light is fitted with two sliding magnetic brackets which can rotate 180° to direct the light as required, whilst also giving the flexibility to attach the light to any ferrous metal avoiding badges and logos. Features two light settings with an operating time of up to 12 hours. Powered by a rechargeable 3.7V 2.2Ah Lithium-ion battery and includes an LED charging indicator. Supplied with a 1m USB charging cable.

LED Type:	15 SMD
Lumen Output (High/Low):	150/100lm
Operating Time (High/Low):	6/12hr
Charging Time:	3hr
Battery:	3.7V 2.2Ah Li-ion
Dimensions (W x D x H):	450 x 50 x 30mm



C NEW

(Lamps not included.)

C Under-Bonnet Lamp Rail
Model No. **ULR01**

Versatile aluminium and steel construction allows easy fixing of magnetic lamps. Nylon coated TPE arm ends protect the edges of the bonnet. Magnetic bases rotate 360° horizontally to obtain required lighting angle. Centre buckle allows extension of the rail, and then clips back down to fix the length. Easy push-button release allows the bases to move freely along the section of rail. Collapsed size: 85 x 11 x 18cm, Extended size: 210 x 11 x 18cm.



A NEW



RECHARGEABLE

1000 LUMENS

SMD LED

A 63 SMD LED Under-Bonnet Cordless Rechargeable Lamp

Model No. LED138

Robust aluminium design with built-in spring loaded telescopic mounting brackets. Both brackets can rotate 360° individually making it easy to direct the light where required. 63 SMD LEDs have two options on light settings; full - 1000lm, half - 500lm. Includes battery level indicator, mains charger and USB lead.

LED Type:	63 SMD
Lumen Output (High/Low):	1000/500lm
Minimum/Maximum Width:	1200/1800mm
Operating Time (High/Low):	3/6hr
Charging Time:	4.5hr
Battery:	3.7V 4.4Ah Li-ion



B 40 SMD LED Folding Cordless Under-Bonnet Rechargeable Lamp

Model No. LED136

Robust design with built-in spring loaded telescopic mounting brackets. Soft padded hooks provide good protection against the bonnet. An adjustable light source, with 40 SMD LEDs, gives complete engine bay illumination. Folding design for easy storage. Light source rotates within clamps to direct as required. Includes battery level indicator, mains charger and in-car charger.

LED Type:	40 SMD
Lumen Output:	1400lm
Minimum/Maximum Bonnet Width:	1230/1680mm
Operating Time (High/Low):	1.5/3hr
Charging Time:	6hr
Battery:	7.4V 2.2Ah Li-ion

B



RECHARGEABLE

1400 LUMENS

SMD LED

Easy storage.

C 15W COB LED Under-Bonnet Rechargeable Inspection Lamp

Model No. LED137

Features spring loaded telescopic arms extendable from 1200mm to 1750mm, enabling use on a variety of vehicles. Arms feature padded hooks to ensure bodywork is not damaged in use. Fitted with 3 x 5W COB LEDs providing up to 1000 lumens of light output. Each light has a 40° angle adjustment to ensure required area is illuminated, whilst alleviating shadow effects. Includes battery level indicator, USB plug and charger cable.

LED Type:	3 x 5W COB
Lumen Output:	1000lm
Minimum/Maximum Bonnet Width:	1200/1750mm
Operating Time:	15hr
Charging Time:	8hr
IP Rating:	IP40
Battery:	3.7V 10.4Ah Li-ion

C



RECHARGEABLE

UP TO 1000 LUMENS

COB LED



A-F LED Work Lights

Model No. SEE BELOW

Operating voltage of 10-30V DC. Waterproof rating of IP68. ECE R10 Certified and E-Marked. Suitable replacement for traditional halogen work lights. Powder coated die-cast aluminium housing. Adjustable grade 201 shock-resistant stainless steel bracket.

A NEW SMD LED



960 LUMENS

A 12W SMD LED Mini Round Work Light with Mounting Bracket

Model No. LED1R

4 x 3W Epistar™ high power LEDs. Produces up to 960 lumens output.

LED Type:	4 x 3W SMD
Supply:	10-30V DC
Lumen Output:	960lm
Size:	Ø80mm

B NEW SMD LED



1200 LUMENS

B 15W SMD LED Mini Square Work Light with Mounting Bracket

Model No. LED2S

5 x 3W Epistar™ high power LEDs. Produces up to 1200 lumens output.

LED Type:	5 x 3W SMD
Supply:	10-30V DC
Lumen Output:	1200lm
Size (W x H):	83 x 83mm

C NEW SMD LED



2160 LUMENS

C 27W SMD LED Round Work Light with Mounting Bracket

Model No. LED3R

9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output.

LED Type:	9 x 3W SMD
Supply:	10-30V DC
Lumen Output:	2160lm
Size:	Ø115mm



G 27W SMD LED Round Work Light with Magnetic Base

Model No. LED3RM

9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output. Operating voltage of 10-30V DC. Waterproof rating of IP68. ECE R10 Certified and E-Marked. Suitable replacement for traditional halogen work lights. Powder coated die-cast aluminium housing. Adjustable grade 304 shock-resistant stainless steel bracket. Supplied with a magnetic base, coiled cable and cigarette lighter plug.

LED Type:	9 x 3W SMD
Supply:	10-30V DC
Lumen Output:	2160lm
Size:	Ø115mm

D NEW SMD LED



2160 LUMENS

D 27W SMD LED Square Work Light with Mounting Bracket

Model No. LED3S

9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output.

LED Type:	9 x 3W SMD
Supply:	10-30V DC
Lumen Output:	2160lm
Size (W x H):	108 x 108mm

E NEW SMD LED



3360 LUMENS

E 42W SMD LED Round Work Light with Mounting Bracket

Model No. LED4R

14 x 3W Epistar™ high power LEDs. Produces up to 3360 lumens output.

LED Type:	14 x 3W SMD
Supply:	10-30V DC
Lumen Output:	3360lm
Size:	Ø115mm

F NEW SMD LED



3840 LUMENS

F 48W SMD LED Square Work Light with Mounting Bracket

Model No. LED5S

16 x 3W Epistar™ high power LEDs. Produces up to 3840 lumens output.

LED Type:	16 x 3W SMD
Supply:	10-30V DC
Lumen Output:	3840lm
Size (W x H):	108 x 108mm



H-I Universal Light Mounting Brackets Number Plate Fitting

Model No. SEE BELOW

Simple, lightweight solution to fitting driving lamps or LED light bars to the front of a vehicle. Manufactured from lightweight powder coated aluminium. Enables lights to be fitted above or below the number plate. Ensure that the bracket is securely attached to the vehicle and is capable of supporting the lamps. Make sure the number plate is clearly visible and not obscured by the lamps or fittings.

Model No:	Size (H x W x D):
H DLB01	125 x 365 x 55mm
I DLB02	120 x 590 x 90mm



A - D 12/24V Rotating Beacons

Model No. **SEE BELOW**

Fully approved for highway use to ECE R65. Heavy-duty ABS bases. Quick release UV stabilised domes will not fade if exposed to prolonged sunlight. Supplied with 2 bulbs.



E 12V Rotating Amber Beacon with Magnetic Base

Model No. **RB75412**

Fitted with a high power base magnet. Supplied with 3m coiled flex and universal vehicle accessory socket plug. N.B. Not approved for highway use.

F - I 12/24V SMD LED Warning Beacons

Model No. **SEE BELOW**

Fully approved for highway use to EN 65. Heavy-duty ABS bases. Quick release UV stabilised domes will not fade when exposed to sunlight. Features 40 LEDs for an increased output of light. Dual voltage (12/24V) with 3-function control allowing different LED configurations depending on operation (Switch 1: Rotating flash: flash rotates mimicking a rotary beacon. Switch 2: Six rapid flashes followed by a break. Switch 3: Two flashes followed by a break). CE Approved and E-Marked.



H 12V/24V SMD LED Warning Beacon with Magnetic Base

Model No. **WB954LED**

Beacon fitted with six powerful magnets, strong enough to cope with normal road speeds. Supplied with 3m coiled flex and universal vehicle accessory socket plug.



A 12V/24V Rotating Beacon with 12mm Bolt Fixing

Model No. **RB951**

12V/24V Single point mounting beacon suitable for direct mounting to vehicle roof using a 12mm bolt.



C 12V/24V Rotating Beacon with Magnetic Base

Model No. **RB954**

Beacon fitted with high power magnet strong enough to cope with normal road speeds. Supplied with 3m coiled flex and universal vehicle accessory socket plug.



F 12V/24V SMD LED Warning Beacon with 12mm Bolt Fixing

Model No. **WB951LED**

Single point mounting beacon suitable for direct mounting to vehicle roof using a 12mm bolt.



I 12V/24V SMD LED Warning Beacon with Flexible Spigot Base

Model No. **WB955LED**

Beacon with flexible DIN element suitable for agricultural vehicles where standard beacons may be broken.



B 12V/24V Rotating Beacon with 3 Bolt Fixings

Model No. **RB952**

Direct mounting beacon pre-drilled with 3 x 6.5mm holes.



D 12V/24V Rotating Beacon with Flexible Spigot Base

Model No. **RB955**

Beacon with flexible DIN element suitable for agricultural vehicles where standard beacons may be broken.



G 12V/24V SMD LED Warning Beacon with 3 Bolt Fixing

Model No. **WB952LED**

Direct mounting beacon pre-drilled with 3 x 6.5mm holes.



J - K 2 Bolt Fixing Beacon Brackets for RB955LED & WB955LED

Model No. **SEE BELOW**

Model No:	Type:
J RB95B1	Straight Mount Fixing - Ø24mm DIN Spigot
K RB95B2	90° Vertical Fixing - Ø24mm DIN Spigot



A 12/24V 80 LED Mini Light Bar - Magnetic Base

Model No. **MLB80MB**

Extremely bright 80 amber LED high intensity mini light bar fitted with two high strength magnets for ease of installation. Ten modules fitted with 8 LEDs creating a 360° light. Fitted with a 3m cable and 12V vehicle accessory socket. Plug includes two switches, on/off and a momentary switch, giving you the option of ten different flash patterns. Built-in memory recalls last pattern selected. ECE R65 & R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply:	12-24V DC
Temperature Range:	-30°C to +50°C
Dimensions (W x D x H):	279 x 165 x 61mm
Nett Weight:	1.2kg

B 12/24V 80 LED Mini Light Bar Single Bolt Fixing

Model No. **MLB80SB**

Extremely bright 80 amber LED high intensity mini light bar fitted with a 10mm single bolt fixing. Ten modules fitted with 8 LEDs, creating a 360° light. Built-in 10 option flash pattern that has a built-in memory which recalls the last pattern selected. ECE R65 & R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply:	12-24V DC
Temperature Range:	-30°C to +50°C
Dimensions (W x D x H):	279 x 165 x 61mm
Nett Weight:	1kg



C 12 SMD & 6 SMD LED Rotating Hazard Warning Emergency Light

Model No. **LED040**

Rotating warning light is ideal to keep in the car for a variety of roadside emergency applications and hazard awareness. Durable, waterproof (IPX5) and extremely heavy-duty design. Features nine different warning functions with 12 ultra-bright amber coloured SMD LEDs and six white SMDs for use as a torch producing 150 lumens. Visible 360° at 500m distance. Includes three magnets for adhering to any ferrous material and hanging hook for hands-free operation. Powered by 3 x AAA batteries (not included).

LED Type:	12 SMD + 6 SMD
Dimensions:	130 x 120 x 45mm
Functions:	White 6 SMD Light on, Amber Double Flash Quick, Double Flash Slow, Single Flash, Rotate, Alternate Flash, SOS, All Amber Light On, 2 x Amber On
Battery:	3 x AAA (not included)

D 1W COB LED Auto Light with PIR Sensor

Model No. **GL93**

Manufactured from a lightweight composite material. Two 0.5W bright white COB LEDs. Easily positioned on a 90° axis. Simple on/off switch or automatic setting, which switches the LEDs on when the PIR sensor detects movement. Suitable for garden sheds, garages or around the home. Features strong magnets on the rear that will attach to any ferrous surface.

LED Type:	2 x 0.5W COB
Lumen Output:	80lm
Battery:	3 x AA (not included)



E 1.2W COB LED Auto Light with PIR Sensor

Model No. **GL931**

Manufactured from a lightweight composite material. Powerful twin 0.6W COB LED producing 120lm. Easily positioned on a 90° axis. Simple on/off switch or automatic setting, which switches the LEDs on when the PIR sensor detects movement. Suitable for garden sheds, garages or around the home. Features strong magnets on the rear that will attach to any ferrous surface.

LED Type:	2 x 0.6W COB
Lumen Output:	120lm
Battery:	3 x AA (not included)

A - B



400W

A - B 400W C-Class Halogen Tubes
Model No. SEE BELOW

Energy saving C-Class 400W tubes. Suitable as replacement for standard 500W halogen tubes.

Model No:	Supply:	Power:
A ML400B	230V	400W
B ML400B110V	110V	400W

C 36 LED Bulb Unit
Model No. LED3612B

Bright, 36 LED unit with automotive bayonet fitting. Suitable for 12V supply, AC or DC. Low, 250mA, current draw is a big advantage when operating from vehicle battery.

Supply:	12V AC or DC
Current:	200-250mA
LED Type:	36

C



12V

D

SMD LED

60 LUMENS



D 6 SMD LED Dimmable Rechargeable Dual Mounting Magnifying Work Light
Model No. WL63/8D

Powerful 3 dioptre 109mm and 8 dioptre 24mm precision lens gives high quality magnifying capabilities. Features 6 SMD LEDs producing up to 60 lumens to illuminate the object for improved detailed work. Built-in touch sensitive dimmer switch. Magnifier can detach from its sturdy base and spring clamp to a work bench up to 45mm thick. Ideal for electrical engineers, engravers and fine detail work. Rechargeable 400mAh lithium cell battery. Supplied with micro USB cable.

LED Type:	6 SMD
Supply:	5V

E

SMD LED



E 48 SMD LED Bench Mounting Magnifying Work Light
Model No. WL483D

Powerful 3 dioptre 120mm precision lens gives high quality magnifying capabilities. Features 48 SMD LEDs to illuminate the object for improved detailed work. Multi-position swing arm allows simple positioning of lamp to suit task. Features a G-clamp base to secure to a workbench or table. Ideal for electrical engineers, engravers and fine detail work. Supplied with 3-pin plug.

LED Type:	48 SMD
Supply:	230V

F

SMD LED

550 LUMENS



F 45 SMD LED Dimmable Dual Mounting Magnifying Work Light
Model No. WL53/8D

Powerful 3 dioptre 85mm and 8 dioptre 22mm precision lens gives high quality magnifying capabilities. Features 45 SMD LEDs producing up to 550 lumens to illuminate the object for improved detailed work. Includes a built-in touch sensitive dimmer switch. Extremely strong and flexible neck allowing ease of positioning. Features a G-clamp base to secure to a workbench or table. Also includes a sturdy base which the magnifier can sit in. Ideal for electrical engineers, engravers and fine detail work. Supplied with 3-pin plug.

LED Type:	45 SMD
Supply:	230V

G

NEW



230V

G 31200mAh Lithium AC Power Pack 160W
Model No. SPB160W

Powered by Lithium-ion technology. Easily fits in a glove box or backpack and it benefits from being a compact, 1.5kg leisure unit which provides multiple high amperage outputs. This unit can also supply several full charges for smartphones (iPhone X; seven charges, Samsung Galaxy Note; six charges) or two full charges for your tablet/laptop (based on an 8800mAh battery) as well as many other devices. Supplied with both Micro USB and Type-C charging cables. Includes a small integral work light.

Dimensions (W x D x H): 263 x 115 x 40mm

G NEW

230V



Charge Indicator.

230V-50HZ AC Output.

2 x 12V 10A DC Outputs (120W MAX).

Small Integral Work Light.

Textured Grip.

1 x Micro USB, 1 x TYPE-C Input.

Standard USB 5V-2A, QC3.0 (5V-2A, 9V-2A, 12V-1.5A), Type-C Output (5V-2A).





A 1.4m Powercube Extension Cable
4 x 230V & 2 x USB Sockets
Model No. **EL144USB**

Space-saving cube design. Suitable for garage, workshop and office applications. Features 2 x 5V (2.1A) USB sockets and 4 x 230V sockets. Fitted with 3-pin heavy-duty plug. Supplied with bracket, suitable for mounting under desks (covers one socket).

Colour:	White
Sockets:	4 x 230V, 2 x USB 5V~2.1A
Cable Section:	3 x 1.25mm ²
Length:	1.4m



B **NEW** 1.4m Extension Cable Cube 3 x 230V &
3 x USB Sockets & Wireless Charging Pad
Model No. **EL144WC**

Space-saving cube design. Suitable for garage, workshop and office applications. Features 3 x 5V (2.4A) USB sockets and 3 x 230V sockets. Fitted with 3-pin heavy-duty plug. Includes wireless charging pad (5W) suitable for any wireless charging enabled devices.

Colour:	White
Sockets:	3 x 230V, 3 x USB 5V~2.4A
Cable Section:	3 x 1.25mm ²
Length:	1.4m



C-F 2.6m Extension Leads with 230V & USB Sockets
Model No. **SEE BELOW**

Suitable for garage, workshop and office applications. Features 2 x 5V (2.4A) USB sockets and 230V sockets (quantity dependent on model) and an on/off rocker switch. Fitted with 3-pin heavy-duty plug.

	C	D	E	F
Model No:	EL32USBB	EL32USBW	EL34USBB	EL34USBW
Colour:	Black	White	Black	White
Sockets:	2 x 230V, 2 x USB 5V~2.4A	2 x 230V, 2 x USB 5V~2.4A	4 x 230V, 2 x USB 5V~2.4A	4 x 230V, 2 x USB 5V~2.4A
Cable Section:	3 x 1.5mm ²	3 x 1.5mm ²	3 x 1.5mm ²	3 x 1.5mm ²
Length:	2.6m	2.6m	2.6m	2.6m



G-H 13A Plug
Model No. **SEE BELOW**

G Model No:	PL13/320S
Pack Size:	Single
H Model No:	PL13/320
Pack Size:	Box of 20



I-J 13A Heavy-Duty Plug
Model No. **SEE BELOW**

I Model No:	PL/13/3S
Pack Size:	Single
J Model No:	PL/13/3
Pack Size:	Box of 10



K RCD Safety Adaptor 230V
Model No. **RCD981**

Cuts power automatically to protect against electrocution. Suitable for all types of indoor and outdoor electrical appliances. Easy-to-use, 2-button operation. No wiring needed - plugs straight into 13A socket. No need to remove from socket to reset unit.

Supply:	230V
Maximum Load:	3120W
Maximum Operating Current:	13A
Trip Speed:	30ms
Trip Current:	30mA

A - G Cable Reels 230V

Model No. [SEE BELOW](#)

A comprehensive range to meet the different requirements of the workshop, site, office or home environments. All models manufactured to comply with the latest BS standards. Four outlets incorporating a thermal trip which cuts supply if cable becomes overloaded.



A 10m Cassette Type Cable Reel with Thermal Trip 4 x 230V

Model No. [BCR10B](#)

Supply:	230V
Length:	10m
Cable Section:	3 x 1mm ²
Cable Type:	PVC
Sockets:	4
Thermal Trip:	✓
Drum Size:	Medium
Drum Type:	Composite
Capacity Wound:	720W
Capacity Unwound:	2400W

B - C Box Type Cable Reels with Thermal Trip 4 x 230V

Model No. [SEE BELOW](#)

	B	C
Model No:	BCR15CB	BCR25CB
Supply:	230V	230V
Length:	15m	25m
Cable Section:	3 x 1.25mm ²	3 x 1.25mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Medium	Medium
Drum Type:	Composite	Composite
Capacity Wound:	1200W	1200W
Capacity Unwound:	3120W	3120W



D - G Cable Reels with Thermal Trip 4 x 230V

Model No. [SEE BELOW](#)

	D	E	F	G
Model No:	BCR153T	BCR25	BCR2525	BCR50
Supply:	230V	230V	230V	230V
Length:	15m	25m	25m	50m
Cable Section:	3 x 1.25mm ²	3 x 1.25mm ²	3 x 2.5mm ²	3 x 1.25mm ²
Cable Type:	PVC	PVC	PVC	PVC
Sockets:	4	4	4	4
Thermal Trip:	✓	✓	✓	✓
Drum Size:	Medium	Medium	Medium	Medium
Drum Type:	Composite	Composite	Composite	Composite
Capacity Wound:	960W	960W	1440W	960W
Capacity Unwound:	3120W	3120W	3120W	3120W



A 25m Cable Reel with Thermal Trip & RCD Plug 4 x 230V
Model No. **BCR25RCD**

Supply:	230V
Length:	25m
Cable Section:	3 x 1.25mm ²
Cable Type:	PVC
Sockets:	4
Thermal Trip:	✓
Drum Size:	Medium
Drum Type:	Composite
Capacity Wound:	960W
Capacity Unwound:	3120W

B 25m Heavy-Duty Cable Reel with Thermal Trip 2 x 110V
Model No. **CR12515**

Supply:	110V
Length:	25m
Cable Section:	3 x 1.5mm ²
Cable Type:	PVC
Sockets:	2
Thermal Trip:	✓
Drum Size:	Medium
Drum Type:	Composite
Capacity Wound:	660W
Capacity Unwound:	1760W

C 15m Caravan & Camping Cable Reel with RCD Plug
Model No. **WSPC1633U**

Supply:	230V
Length:	15m
Cable Section:	3 x 1.5mm ²

Caravan and camping cable reel fitted with three UK standard 230V 13A sockets, 2 x 2.1A USB ports and a 2P+E plug 230V 16A. Fitted with a residual current circuit breaker 25A 2-pole and a mini circuit breaker 16A 2-pole. IP44 rated.



D - E 25m Heavy-Duty Cable Reels with Thermal Trip 4 x 230V
Model No. **SEE BELOW**

	D	E
Model No:	CR25/1.5	CR22525
Supply:	230V	230V
Length:	25m	25m
Cable Section:	3 x 1.5mm ²	3 x 2.5mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Medium	Medium
Drum Type:	Composite	Composite
Capacity Wound:	720W	720W
Capacity Unwound:	3120W	3120W



F - G 50m Heavy-Duty Cable Reels with Thermal Trip 4 x 230V
Model No. **SEE BELOW**

	F	G
Model No:	CR50/1.5	CR25025
Supply:	230V	230V
Length:	50m	50m
Cable Section:	3 x 1.5mm ²	3 x 2.5mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Large	Large
Drum Type:	Composite	Composite
Capacity Wound:	720W	720W
Capacity Unwound:	3120W	3120W



- A-C**
- 10m
- 15m
- 25m
- 1mm² Cable
- 1.5mm² Cable
- Thermal Trip

A-C Retractable Cable Reels 230V
Model No. [SEE BELOW](#)

Durable composite housing operated by simple pull and release action. Features integral manual thermal trip switch to prevent overload and LED power indicator. Supplied with single socket outlet.

	A	B	C
Model No:	CRM101	CRM151	CRM251
Voltage:	230V	230V	230V
Cable Length:	10m	15m	25m
Cable Section:	3 x 1mm ²	3 x 1mm ²	3 x 1.5mm ²
Thermal Trip:	✓	✓	✓
Capacity Wound:	1000W	1000W	1000W
Capacity Unwound:	1500W	1400W	3000W



- D-E**
- 10m
- 15m

D-E Retractable Cable Reels 230V
Model No. [SEE BELOW](#)

Hard-wearing, composite cased, retracting electric cable reels operated by simple pull and release action. Features integral manual thermal trip switch to prevent overload. Double socket outlet with individual LED power indicators and rocker on/off switches.

	D	E
Model No:	CRM10	CRM15
Voltage:	230V	230V
Cable Length:	10m	15m
Cable Section:	3 x 1.5mm ²	3 x 1.5mm ²
Thermal Trip:	✓	✓
Capacity Wound:	1000W	1000W
Capacity Unwound:	2750W	2750W



F 16A/13A Trailing Socket & Cable Set
Model No. [WPS16131](#)

Trailing socket and cable fitted with a 230V~50Hz 13A standard UK socket and 2P+E plug rated at 230V~50Hz 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length:	350mm Cable
Electrical Plug Type:	Blue - 16A-2P+E



G 13A/16A Trailing Socket & Cable Set
Model No. [WSP1316](#)

Trailing socket and cable fitted with a 230V~50Hz 13A standard UK plug and 2P+E socket rated at 230V~50Hz 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length:	350mm Cable
----------------	-------------



H 16A/13A Trailing Twin Socket & Cable Set
Model No. [WPS16132](#)

Trailing twin socket and cable fitted with 230V~50Hz 13A standard UK sockets and 2P+E plug rated at 230V~50Hz 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length:	350mm Cable
Electrical Plug Type:	Blue - 16A-2P+E



I 14m Extension Lead 230V 13A
Model No. [EL15240](#)

Extension cable fitted with 230V~50Hz 13A plug and socket. Conforms to BS EN 60309.


Length:	14m Cable
Cable Section:	1.5mm ²



J 15m Caravan & Camping Mains Unit with RCD
Model No. [WSC16133](#)

Caravan and camping mains unit fitted with three UK standard 230V~50Hz 13A sockets and a 2P+E Plug rated at 230V~50Hz 16A. Fitted with a residual current circuit breaker 25A 2-pole and a mini circuit breaker 16A 2-pole. IP44 Rated.

Length:	15m
Cable Section:	1.5mm ²
Electrical Plug Type:	Blue - 16A-2P+E

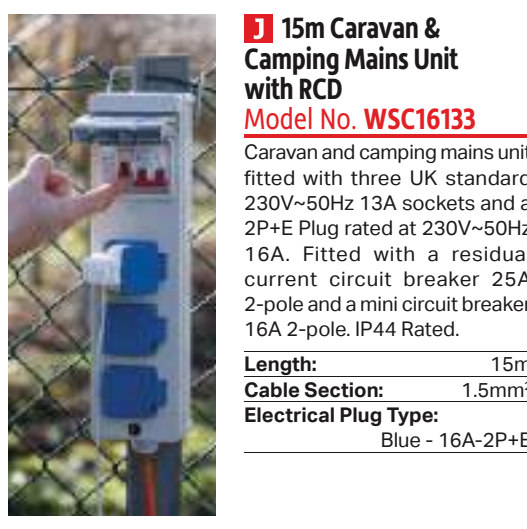



NEW
230V

A 230V 16A/13A Socket Adaptor
Model No. **W1613PS**

Socket adaptor with 2P+E plug 16A to 3-Pin standard UK plug 13A. IP44 Rated. Conforms to EN60309 and BS1363.

Electrical Plug Type: Blue - 16A-2P+E



NEW
230V

B - C 230V 2P+E Blue Plugs
Model No. **SEE BELOW**

230V Plugs, IP44 rated, 16A. 2P+E connectors. Conforms to BS EN 60309.

B Model No:	WP24016
Description:	16A/230V
C Model No:	WP24032
Description:	32A/230V



NEW
230V

D - E 230V 2P+E Blue Sockets
Model No. **SEE BELOW**

230V Sockets for use with 2P+E connectors. IP44 Rated.

D Model No:	WC24016
Description:	16A/230V
E Model No:	WC24032
Description:	32A/230V



230V **NEW**

F 230V 3-Way Splitter
Model No. **WTWS16A**

3-Way splitter 230V~50Hz, allows splitting of a maximum current of 16A. Fitted with one 2P+E input and three output connectors. IP44 Rated.



NEW
110V

G - H 110V 2P+E Yellow Plugs
Model No. **SEE BELOW**

110V Plugs, IP44 rated, 2P+E connectors. Conforms to BS EN 60309.

G Model No:	WP11016
Description:	16A/110V
H Model No:	WP11032
Description:	32A/110V



NEW
110V

I - J 110V 2P+E Yellow Sockets
Model No. **SEE BELOW**

110V Sockets for use with 2P+E connectors. IP44 Rated.

I Model No:	WC11016
Description:	16A/110V
J Model No:	WC11032
Description:	32A/110V



NEW
110V

K 110V 3-Way Splitter
Model No. **WSTWA**

110V 2P+E 3-Way 16A Splitter. IP44 Rated.



NEW
110V

L 110V 4-Way Splitter Box
Model No. **WSSB16**

4-Way 16A Splitter Box with 1.5mm cable and 16A plug. CEE Connector. IP44 Rated.



M **NEW**

N **NEW**

O **NEW**

110V

M - O 110V Portable Transformers
Model No. **SEE BELOW**

110V Transformers with tool rated performance suitable for intermittent running of power tools and continuous running of lighting products, within specified capacity. IP54 Rated units with case manufactured from GRP and insulated to class H with thermostatic overload protection. Fitted with flexible 3-core cable.

	M	N	O
Model No:	WST1500	WST3000	WST5000
Power Tool Rating:	1500VA	3000VA	5000VA
Continuous Rating:	900VA	1650VA	2800VA
Sockets:	2 x 16A	2 x 16A	2 x 16A, 1 x 32A
Weight:	11kg	17kg	30.5kg



NEW

110V

P 5kVA Portable Vented Transformer
16/32A Outlets
Model No. **WST5000MV/2**

110V Transformer with continuous 3000va output which is ideal for 110V heaters and power tools that require a continuous load. IP20 Rated unit with steel casing and insulated to class 1 with ventilated outlets. Fitted with thermal overload protection. Supplied with 1 x 16A and 1 x 32A/110V output socket.

Power Tool Rating:	5000VA
Continuous Rating:	3000VA
Sockets:	1 x 16A, 1 x 32A
Weight:	30.5kg



A - C 12V DC Power Inverters - 230V ~ 50Hz
Model No. SEE BELOW

Supplies continuous smooth 230V power from 12V DC power supply found in cars, caravans, boats and commercials. Suitable for powering small TVs, laptops, power tools and various other electrical equipment within the wattage rating of the inverter. Features a USB port (5W/2.1A) for use on various domestic electronic equipment such as digital cameras and mobile phones. Aluminium case provides durability and maximum heat dissipation. Safety features include automatic overload shut-down, short circuit protection, low voltage alarm, low voltage shut-down and overheat shut-down. Supplied with vehicle accessory socket plug and/or battery clips/terminals depending on model.

	A	B	C
Model No:	PI300	PI500	PI1000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	300W	500W	1000W
Maximum Output:	600W	1000W	2000W
Output Frequency:	50Hz	50Hz	50Hz
Dimensions (W x D x H):	180 x 95 x 58mm	230 x 95 x 58mm	240 x 160 x 65mm
Supply Connection:	Battery Clips	Battery Clips	Battery Terminal Leads
USB Output:	5V-2.1A	5V-2.1A	5V-2.1A

D 24V to 12V DC 15A Converter
Model No. DC2412

Suitable for commercial vehicles with 24V DC battery supply. Converts down to 12V DC 15A vehicle accessory socket output. Features a low and high voltage alarm for added protection. Additionally includes a 5V USB outlet. Supplied with 550mm vehicle accessory socket plug.

Input Voltage:	24V
Output Voltage:	12V
Output:	15A
Dimensions (W x D x H):	120 x 85 x 50mm
Supply Connection:	24V Vehicle Accessory Socket Plug



E - G 12V DC Pure Sine Wave Power Inverters - 230V ~ 50Hz
Model No. SEE BELOW

Pure sine wave inverters have been designed to produce the same AV frequency produced on the grid, making them more reliable than traditional inverters, without any fluctuation in power or performance. Units operate from a 12V DC power supply found in cars, caravans, boats and commercials. High performance outlet eliminates electrical interference, reducing noise levels during use. Suitable for powering small TVs, laptops, power tools and various electrical equipment within the wattage rating of the inverter. Includes USB outlet for charging and operating small electric devices. Aluminium case provides durability and maximum heat dissipation. Safety features include automatic overload shut-down and short circuit protection. Supplied with vehicle accessory socket plug and/or battery clips/terminals depending on model.

	E	F	G
Model No:	PSI300	PSI600	PSI1000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	300W	600W	1000W
Maximum Output:	600W	1200W	2000W
Output Frequency:	50Hz	50Hz	50Hz
Dimensions (W x D x H):	200 x 110 x 60mm	245 x 110 x 60mm	315 x 140 x 80mm
Supply Connection:	Vehicle Accessory Socket Plug & Battery Clips	Battery Clips	Battery Terminal Leads



A - C Power Inverters Modified Sine Wave 12V DC - 230V-50Hz
Model No. SEE BELOW

Supplies continuous smooth 230V power from 12V DC power supply found in cars, caravans, boats and commercials. Features two USB charging ports combined 2.1A and an LCD screen which displays the output wattage, input voltage and battery level. Durable aluminium body with four mounting points for secure installation. Near silent cooling fan for low noise operation. Safety features include overload shutdown, audible low voltage alarm, thermal shutdown and short circuit shutdown. Supplied with 1m battery cables, wired remote control and in-line fuse kit.

Includes wired remote control.



	A	B	C
Model No:	PI1100	PI1500	PI2000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	1100W	1500W	2000W
Maximum Output:	2200W	3000W	4000W
Output Frequency:	50Hz	50Hz	50Hz
USB Output:	5V-2.1A (x2)	5V-2.1A (x2)	5V-2.1A (x2)
Dimensions (W x D x H):	297 x 170 x 88mm	351 x 170 x 88mm	390 x 170 x 88mm
Supply Connection:	Battery Terminal Leads	Battery Terminal Leads	Battery Terminal Leads



Features 2 x 230V power outputs and 2 x USB charging ports.



D 1000W Inverter Generator 230V
2-Stroke Engine
Model No. G1000I

Digital inverter technology provides stable 'clean' output, making the unit suitable for use with sensitive electrical equipment. Automatically adjusts the engine speed to precisely match the load, which allows the generator to run quieter whilst increasing fuel efficiency and lengthening engine life. Electronic ignition and a light pull recoil for easy start-up. Electronic safety overload system. Easy to carry at just 8.7kg. Fitted with a 230V socket.

Motor Power:	1.1kW/1.47hp
Motor Type:	2-Stroke Petrol
Fuel:	Unleaded 95 RON
Output:	230V-50Hz
Current Rating:	3.6A
Continuous Power Rating:	800W
Maximum Power Rating:	1000W
Fuel Tank:	3.5L
Maximum Running Time:	3.2hr
Noise Rating:	95dB(A)
Dry Weight:	8.7kg
Dimensions (W x D x H):	295 x 250 x 345mm



E 2000W Inverter Generator 230V - 4-Stroke Engine
Model No. G2000I

Digital inverter technology provides pure sine wave electric power suitable for use with sensitive electrical equipment. Lightweight, easily lifted and fully portable. Eco mode set up allowing the generator to run quieter (60dB @7m), increase fuel efficiency (4L fuel tank will last 6hr) and reduce emissions. Features light recoil start, fuel gauge, auto voltage adjuster, low oil alarm and electric circuit protector. Fitted with two 230V sockets and 12V DC 8.3A port.

Motor Power:	2.2kW/3hp
Motor Type:	4-Stroke Petrol
Fuel:	Unleaded 95 RON
Output:	230V AC-50Hz/12V DC
Current Rating:	8.3A
Continuous Power Rating:	1600W
Maximum Power Rating:	2000W
Fuel Tank:	4L
Maximum Running Time:	6hr
Noise Rating:	95dB(A)
Dry Weight:	21.5kg
Dimensions (W x D x H):	465 x 280 x 425mm

A



2200W

A 2200W Generator 6.5hp - 4-Stroke Engine 230V
Model No. G2201

Heavy-duty frame design provides full protection and portability. Suitable for running power tools and lighting units. Long running with up to 13 hours on a full tank. Fitted with two 230V 13A sockets. Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.

B



3100W

B 3100W Generator 7hp - 4-Stroke Engine 230V
Model No. G3101

Heavy-duty frame design features two wheels and a large handle, these provide full protection and portability. Suitable for running power tools and lighting units. Long running with up to 11 hours on a full tank. Fitted with 230V 13A sockets (x2). Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.

C



5500W



C 5500W Generator 13hp - 4-Stroke Engine 110/230V
Model No. G5501

Heavy-duty frame design features two wheels and a large handle, these provide full protection and portability. Suitable for running power tools and lighting units. Long running with up to 11 hours on a full tank. Fitted with two 230V 16A and two 110V 16A sockets. Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.

D - F 110V Extension Leads
Model No. SEE BELOW

D Model No:	EL15110
Description:	14m 110V 16A 1.5mm
E Model No:	EL25110/16
Description:	14m 110V 16A 2.5mm
F Model No:	EL25110/32
Description:	14m 110V 32A 2.5mm

D - F

NEW

110V



G - H Extension Leads
Model No. SEE BELOW

G Model No:	EL1523016
Description:	14m 230V 16A 1.5mm
H Model No:	EL2523016
Description:	14m 230V 16A 2.5mm

G - H

NEW

230V



Model No:	G2201
Motor Power:	4.9kW/6.5hp
Motor Type:	4-Stroke Petrol
Output:	230V-50Hz
Current Rating:	8.7A
Continuous Power Rating:	2000W
Maximum Power Rating:	2200W
Fuel Tank:	15L
Maximum Running Time:	13hr
Noise Rating:	94dB(A)
Dry Weight:	37.5kg
Dimensions (W x D x H):	595 x 435 x 425mm

Model No:	G3101
Motor Power:	5.2kW/7hp
Motor Type:	4-Stroke Petrol
Output:	230V-50Hz
Current Rating:	11.3A
Continuous Power Rating:	2600W
Maximum Power Rating:	3100W
Fuel Tank:	15L
Maximum Running Time:	11hr
Noise Rating:	96dB(A)
Dry Weight:	43kg
Dimensions (W x D x H):	595 x 435 x 425mm

Model No:	G5501
Motor Power:	9.7kW/13hp
Motor Type:	4-Stroke Petrol
Output:	230V/110V-50Hz
Current Rating:	16/16A
Continuous Power Rating:	5000/3500W
Maximum Power Rating:	5500/4000W
Fuel Tank:	25L
Maximum Running Time:	11hr
Noise Rating:	96dB(A)
Dry Weight:	77kg
Dimensions (W x D x H):	685 x 540 x 535mm



A - B 230V Inverter Generators 4-Stroke Engine
Model No. **SEE BELOW**

Heavy-duty frame provides full protection and incorporates carry handles for portability. Inverter generators suitable for running sensitive electrical equipment. Produces a clean AC current to match the load. Fitted with 2 x 230V 13A sockets. Increased fuel efficiency compared to standard generators. Features oil warning light, overload indicator and sight glass to monitor fuel level.



	A	B
Model No.	GI2300	GI3500
Motor Power:	2.3kW	3.5kW
Motor Type:	4-Stroke Petrol	4-Stroke Petrol
Output:	230V~50Hz	230V~50Hz
Current Rating:	8.3A	15.2A
Continuous Power Rating:	2000W	3200W
Maximum Power Rating:	2300W	3500W
Fuel Tank:	13L	13L
Maximum Running Time:	13hr	8hr
Noise Rating:	95dB(A)	95dB(A)
Dry Weight:	35.1kg	35.5kg
Dimension (W x D x H):	440 x 520 x 470mm	440 x 520 x 470mm



Extension Leads

For our full range of Extension Leads, see pages 945 to 949.

C
6.5hp
2800W
12V



D
13hp
6000W
12V



C - D Generators - 4-Stroke Engine
Model No. **SEE BELOW**

Heavy-duty industrial frame design provides full protection and portability. Suitable for running power tools and lighting units etc. Running time of up to 10 hours on a full tank. Fitted with 12V battery charging outlet and 16A 230V and 110V sockets. Powerful and reliable generators fitted with maintenance-free brushless alternator. Smooth running units fitted with anti-vibration mountings. Low oil cut-out feature and fuel gauge.



Plugs & Sockets

For our full range of 110V and 230V Plugs, Sockets and Adaptors, see pages 948 to 949.

	C	D
Model No:	GG2800	GG7500
Motor Power:	4.9kW/6.5hp	9.7kW/13hp
Motor Type:	4-Stroke Petrol	4-Stroke Petrol
Output:	230V/110V~50Hz/12V DC	230V/110V~50Hz/12V DC
Current Rating:	10.4A/21.6A/8.3A	22A/45A/8.3A
Continuous Power Rating:	2400W	5000W
Maximum Power Rating:	2800W	6000W
Fuel Tank:	15L	25L
Maximum Running Time:	10hr	10hr
Noise Rating:	90dB(A)	96dB(A)
Dry Weight:	46.5kg	85kg
Dimensions (W x D x H):	623 x 480 x 538mm	713 x 541 x 569mm