

# HOW TO ORDER



Our aim is to make ordering as quick, easy and convenient as possible. Our products are available via a comprehensive network of stockists throughout the UK, Ireland and the rest of the world.

Our Distributors hold stock of fast-moving items. If they do not have the specific item that you require, they can order it from us and we will deliver it promptly.

**Finding your local Stockist is quick and easy, either visit [www.sealey.co.uk](http://www.sealey.co.uk) or call us on the number shown below.**

 **+91 9380647428** **+91 8073843541**

 **[info@vandita-technovations.in](mailto:info@vandita-technovations.in)**  **[www.vandita-technovations.in](http://www.vandita-technovations.in)**

**Our call centre is open between 8.30am to 5.30pm Monday to Friday.** Calls are immediately passed to the first available operator without any complicated routing process. Our experienced, professional and friendly advisors can provide instant stock availability, pricing and technical information.

Our authorised stockists can order direct from us via telephone, email, fax or online using our B2B (Business to Business) website. Here, you can place your order at a time that suits you and view instant stock availability and pricing.

## HUGE STOCKS & FAST DESPATCH

We hold over £30million worth of stock. Modern, computer controlled warehousing enables, on average, 99.8% of our entire product range to be despatched straightaway.

Some items in our Catalogue are very heavy and extra assistance is recommended at the delivery point to help unload. Look out for this logo on products affected.



1	HAND TOOLS	14-264
2	JACKING & LIFTING	265-324
3	MOTORCYCLE TOOLS	325-353
4	BATTERY CHARGERS	354-377
5	VEHICLE SERVICE TOOLS	378-629
6	LUBRICATION	630-677
7	BODYSHOP	678-729
8	AIR POWER TOOLS	730-764
9	COMPRESSORS	765-796
10	WELDING & CUTTING	797-819
11	ELECTRIC POWER TOOLS	820-857
12	POWER TOOL ACCESSORIES	858-912
13	LIGHTING & POWER	913-953
14	STORAGE & WORKSTATIONS	954-1073
15	HEATING & COOLING	1074-1095
16	JANITORIAL, MATERIAL HANDLING & LEISURE	1096-1176
17	MACHINE SHOP	1177-1236
18	SAFETY PRODUCTS	1237-1264
19	CONSUMABLES	1265-1331
INDEX - MODEL NO.		1332-1362
INDEX - DESCRIPTIVE		1363-1370

# COMPRESSORS

## SECTION 9

*back to*  
**SECTION LIST**



**Air Accessories**  
791

**Direct Drive Compressors**  
767 - 771

**Air Filters/Regulators/Lubricators**  
783 - 785

**Low Noise Compressors**  
780 - 783

**Air Hose Reels**  
792 - 794

**Mobile Belt Drive Compressors**  
782

**Air Hoses**  
795 - 796

**Oil Free Belt Drive Compressors**  
766

**Air Line Couplings**  
788 - 790

**Screw Compressors**  
781

**Belt Drive Compressors**  
770 - 779

**Speedfit® Air Supply System**  
786 - 787

PAGE 1300



*You can also find our  
full range of Air Tool &  
Compressor Oils in the  
Consumables Section!*

## A - J Air Filters/Regulators/Lubricators

Model No. SEE BELOW


Suitable for most workshop air supply set-ups. Die-cast control heads with clear polycarbonate bowls. Regulator assembly features locking control knob for presetting air pressure and large, easy-to-read pressure gauge. Filter is fitted with automatic drain tap. Lubricator includes oil/air mix control and sight glass. Filter and lubricator are fitted with metal bowl cages for protection.

### WORKSHOP RANGE

Model No:	SA2001R	SA2001	SA2001/FR	SA2001/F	SA2001/L
Type:	Regulator	Filter/Regulator/ Lubricator	Filter/ Regulator	Filter	Lubricator
Port Size:	3/8"BSP	3/8"BSP	3/8"BSP	3/8"BSP	3/8"BSP
Maximum Working Pressure:	145psi	145psi	145psi	145psi	145psi
Maximum Airflow:	80cfm	55cfm	70cfm	48cfm	55cfm

### HIGH FLOW RANGE

Model No:	SA4001R	SA4001	SA4001FR	SA4001F	SA4001L
Type:	Regulator	Filter/Regulator/ Lubricator	Filter/ Regulator	Filter	Lubricator
Port Size:	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP
Maximum Working Pressure:	145psi	145psi	145psi	145psi	145psi
Maximum Airflow:	210cfm	99cfm	135cfm	135cfm	170cfm

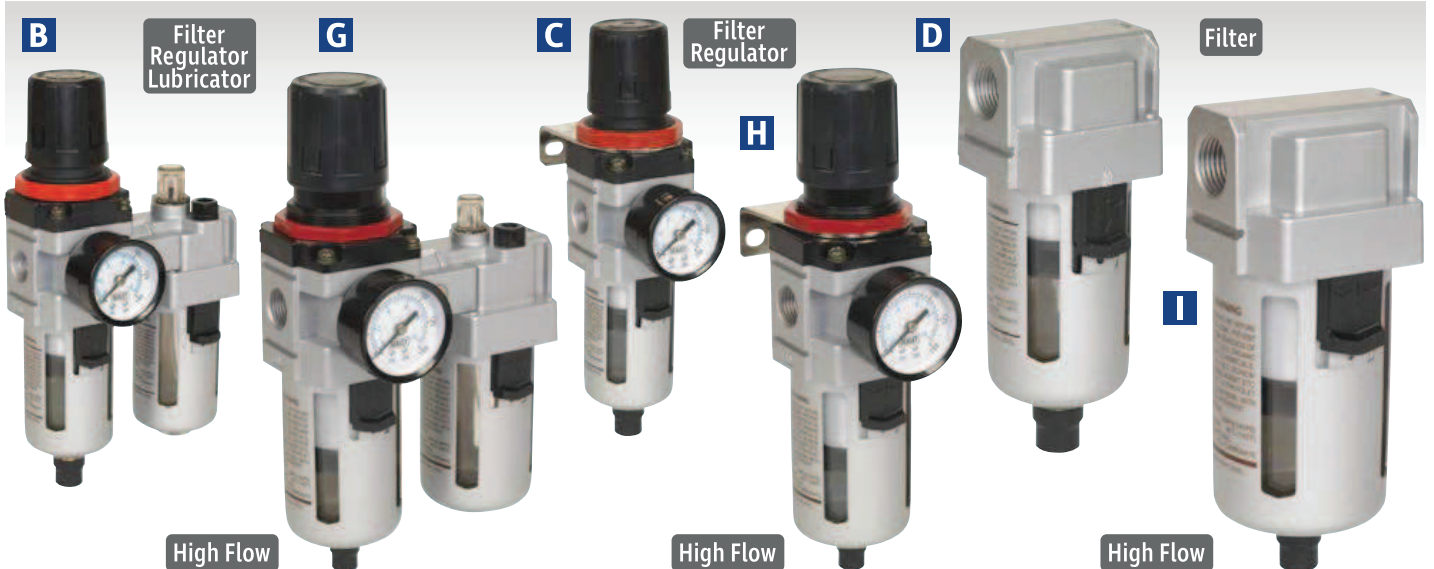

## K Professional HVLP Gravity Feed Spray Gun 1.4mm Set-Up

Model No. HVLPO1

Gravity feed spray gun designed for applying base coats. Features air and paint flow controls for fine adjustment of spray pattern. HVLP Technology and precision engineering delivers consistent and unrivalled results. Suitable for water based paints. Alternative set-ups available separately.

Standard Set-Up:	1.4mm
Available Set-Ups:	1.3, 1.7mm
Recommended Air Pressure:	30-43psi
Air Consumption:	14.5cfm
Pot Capacity:	600ml





## A - L Heavy-Duty Air Filters/Regulators/Lubricators

Model No. SEE BELOW

Suitable for workshop air supply set-ups. Regulator assemblies feature pressure gauge, locking control knob for presetting air pressure and manual 1/8" BSP female drain facility. Lubricators include oil/air mix control and sight glass. Filters and lubricators are fitted with metal bowl cages for protection.

### WORKSHOP RANGE


	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>
Model No:	SA106R	SA106	SA106FR	SA106F	SA106L
Type:	Regulator	Filter/Regulator/ Lubricator	Filter/ Regulator	Filter	Lubricator
Port Size:	1/4"BSP	1/4"BSP	1/4"BSP	1/4"BSP	1/4"BSP
Maximum Supply Pressure:	150psi	150psi	150psi	150psi	150psi
Maximum Outlet Pressure:	125psi	125psi	125psi	125psi	125psi
Maximum Airflow*:	88cfm	60cfm	70cfm	53cfm	60cfm

\*Supply Pressure of 100psi

### HIGH FLOW RANGE

	<b>F</b>	<b>G</b>	<b>H</b>	<b>I</b>	<b>J</b>	<b>K</b>	<b>L</b>
Model No:	SA206R	SA206	SA206FR	SA206FRAD	SA206F	SA206FAD	SA206L
Type:	Regulator	Filter/Regulator/ Lubricator	Filter/ Regulator	Auto Drain Filter Regulator	Filter	Auto Drain Filter	Lubricator
Port Size:	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP	1/2"BSP
Maximum Supply Pressure:	150psi	150psi	150psi	150psi	150psi	150psi	150psi
Maximum Outlet Pressure:	125psi	125psi	125psi	125psi	125psi	125psi	125psi
Maximum Airflow*:	210cfm	105cfm	140cfm	140cfm	140cfm	140cfm	175cfm

\*Supply Pressure of 100psi

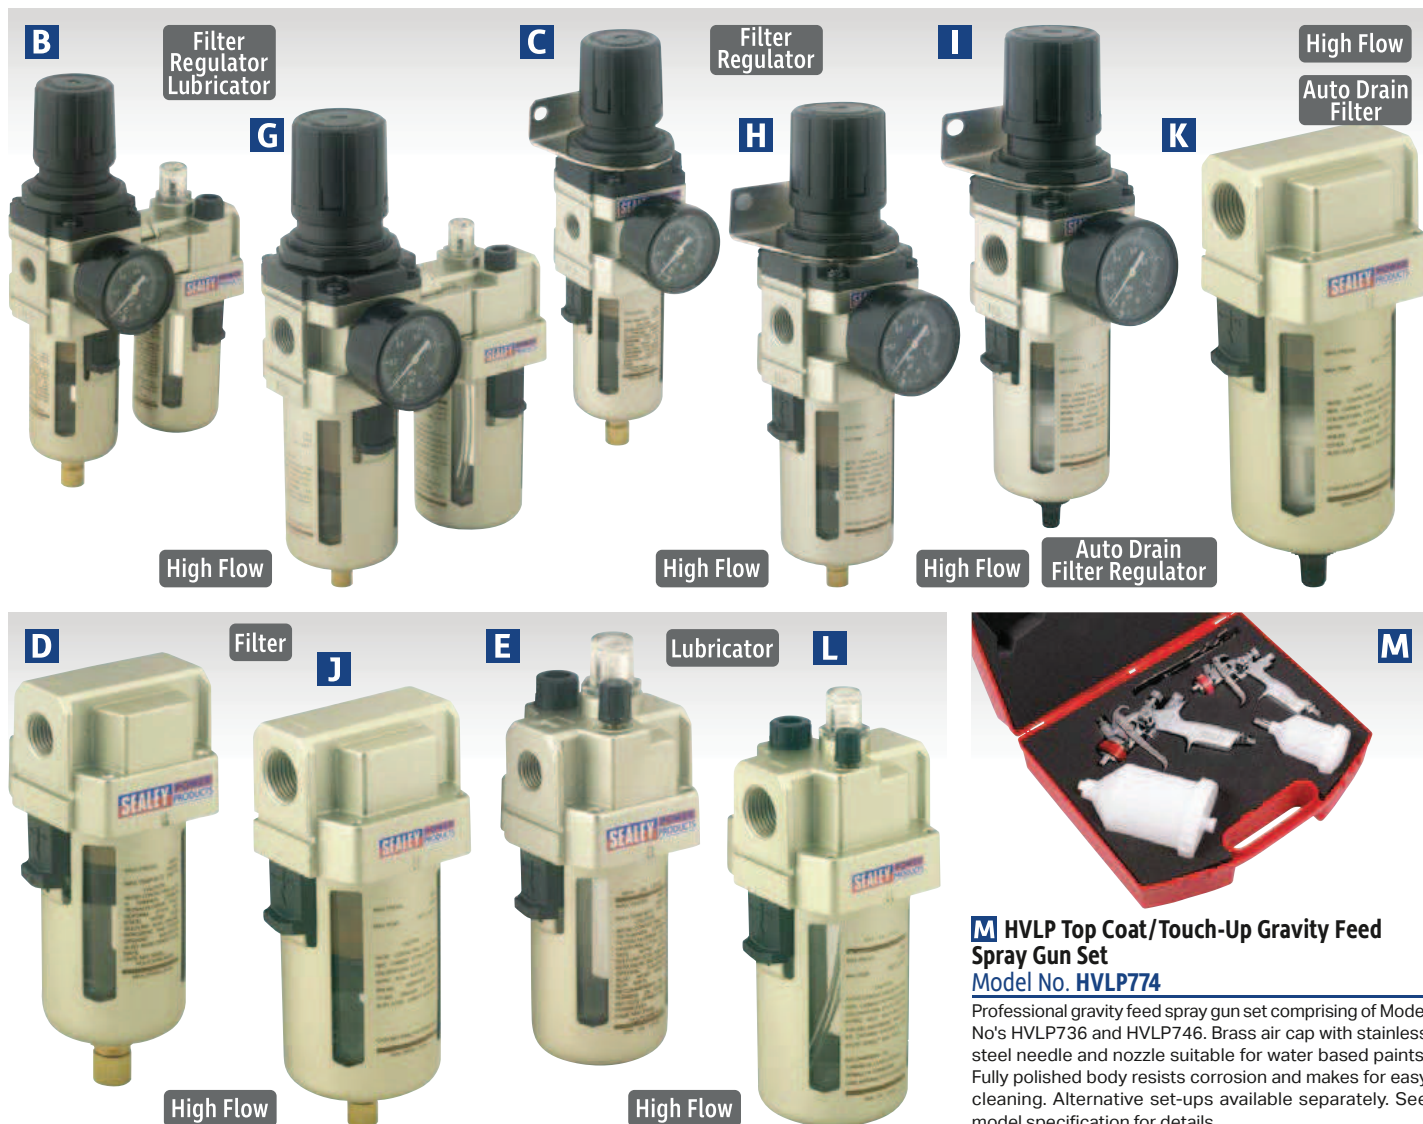

## M HVLP Top Coat/Touch-Up Gravity Feed Spray Gun Set

Model No. HVLP774

Professional gravity feed spray gun set comprising of Model No's HVLP736 and HVLP746. Brass air cap with stainless steel needle and nozzle suitable for water based paints. Fully polished body resists corrosion and makes for easy cleaning. Alternative set-ups available separately. See model specification for details.

# 786 Speedfit® Air Supply System



## Speedfit® Air Supply Ring Main System

Install your own workshop compressed air ring main quickly, easily and competitively with this compressed air system (CAS).

A complete professional compressed air system can be installed quickly and easily, considerably reducing the need for specialist staff. Avoids extensive disruption and downtime.

Lightweight yet strong acetal copolymer fittings and nylon pipe runs, make handling and assembling the system far easier than an equivalent system in galvanized steel.

- ✓ Quick to install - save up to 40% in time and cost.
- ✓ Safe, secure and leak-proof.
- ✓ Simple to reconfigure.
- ✓ Lightweight and easy to handle.
- ✓ Corrosion resistant and maintenance-free.

Simple push action pipe fittings do away with preparing threaded tubes or applying solvents. Complex pipe and fitting configurations are also assembled more rapidly since the fittings can be disassembled and reconfigured quickly.

### Installation Guidelines

For a comprehensive set of installation guidelines and recommendations, call or email our technical department on 01284 757505, [technical@sealey.co.uk](mailto:technical@sealey.co.uk), or visit our website [www.sealey.co.uk](http://www.sealey.co.uk). As with all installation work a certain level of technical competence is required. Refer to 'Approved Code of Practice - Safety of Pressure Systems' available from HMSO.

### Simple to Assemble



1. Cut pipe to size.



2. Push firmly into chosen fitting.




3. Pull on pipe to check secure.



To disconnect, depressurize system, push collet into base of fitting (A) and remove pipe (B). The fitting and pipe may be reused.



Illustration purposes only.

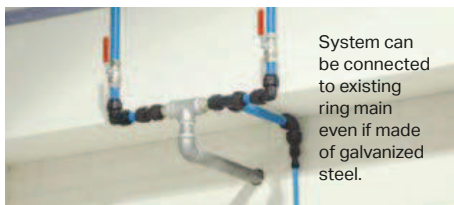

System can be connected to existing ring main even if made of galvanized steel.

### Technical Specification

**Working Temperature Range:** -20 to +70°C

The above specification refers to use with compressed air.

#### Working Pressure

This system is suitable for the following temperatures and pressures:

Temperature:	Pressure:
+23°C:	10bar
+70°C:	7bar

The above ratings are for air. For use with other fluids or at other temperatures and pressures please consult our technical sales department.

#### Pipe Types

These fittings are intended for use with Sealey nylon pipe but are also suitable for use with a wide range of plastic and soft metal pipes including UPVC, ABS, polyethylene, nylon, mild steel and copper to the tolerances set out below. Soft plastic pipe, such as nylon, should have a minimum wall thickness of 1.5mm. The pipe should have a good quality surface and be damage-free.

#### Pipe Tolerances

These fittings are intended for pipes with outside diameters to the following tolerances:

Size:	Ø15, 22 & 28mm OD
Tolerance:	+0.05 to -0.10mm OD

#### Torque Values

The following maximum torque values should be applied:


Size:	1/2"	3/4"	1"
Plastic Threads:	3Nm	4Nm	n/a
Metal Threads:	4Nm	5Nm	5Nm

#### Material Specification

The fittings are made up of three components: Bodies are produced in strong engineering plastic or in brass. O-Rings are nitrile rubber. Collets are produced in acetal copolymer with stainless steel teeth.

#### Applications

Pipe and fittings should be kept clean and undamaged before use. These products are designed for use with air. For other applications please contact our technical sales department.




A

### A Nylon Pipes - Packs of 5 Model No. SEE BELOW

Rigid nylon air pipes suitable for all Sealey ring main fittings.

Model No:	Pack Qty:	Pipe OD:	Length:
CAS15NP	5	Ø15mm	3m
CAS22NP	5	Ø22mm	3m
CAS28NP	5	Ø28mm	3m



B


### B Aluminium Pipes - Pack of 5 Model No. CAS22AP

Aluminium air pipes suitable for all Sealey ring main fittings.

Pack Qty:	5
Pipe OD:	Ø22mm
Length:	3m



C



D

### C Pipe Clips - Packs of 20 Model No. SEE BELOW

Secures pipework to wall.

Model No:	Pack Qty:	Pipe OD:
CAS15PC	20	Ø15mm
CAS22PC	20	Ø22mm
CAS28PC	20	Ø28mm

### D Spacer - Pack of 20 Model No. CASS

Provides additional distance between pipe and wall. Use with pipe clips.

Pack Qty:	20
-----------	----



**A**

**A Straight Connectors**
**Model No. SEE BELOW**

Equal connectors for nylon pipe.

Model No:	Pack Qty:	Pipe OD:
CAS15SC	5	Ø15mm
CAS22SC	5	Ø22mm
CAS28SC	5	Ø28mm

**B**

**B Equal Elbows**
**Model No. SEE BELOW**

90° Elbows with equal pipe fittings.

Model No:	Pack Qty:	Pipe OD:
CAS15EE	5	Ø15mm
CAS22EE	5	Ø22mm
CAS28EE	5	Ø28mm

**C**

**C Equal Tees**
**Model No. SEE BELOW**

Divides main pipe run.

Model No:	Pack Qty:	Pipe OD:
CAS15ET	5	Ø15mm
CAS22ET	5	Ø22mm
CAS28ET	5	Ø28mm

**D**

**D 22-15mm Reducing Tee**
**Model No. CAS2215T**

Suitable for making drops from ring main to workstations.

Pipe OD:	Ø22mm
Stem OD:	Ø15mm
Pack Qty:	5

**E**

**E Straight Adaptors**
**Model No. SEE BELOW**

Converts pipe end to male thread.

Model No:	Pack Qty:	Pipe OD:	Thread:
CAS15SA	2	Ø15mm	1/2"BSPT
CAS22SA	2	Ø22mm	3/4"BSPT
CAS28SA	2	Ø28mm	1"BSPT

**F**

**F Stem Adaptors**
**Model No. SEE BELOW**

Converts coupling to male thread.

Model No:	Pack Qty:	Stem OD:	Thread:
CAS15STA	2	Ø15mm	1/2"BSPT
CAS22STA	2	Ø22mm	3/4"BSPT

**G**

**G Line End Plugs**
**Model No. SEE BELOW**

Caps end of pipe.

Model No:	Pack Qty:	Stem OD:
CAS15P	5	Ø15mm
CAS22P	5	Ø22mm
CAS28P	5	Ø28mm

**H**

**H Stem Elbows**
**Model No. SEE BELOW**

Provides a simple return or can be swivelled in any direction.

Model No:	Pack Qty:	Pipe OD:
CAS15SE	2	Ø15mm
CAS22SE	2	Ø22mm

**I**

**I Reducers**
**Model No. SEE BELOW**

Reduces coupling to stem.

Model No:	Pack Qty:	Stem OD:	Pipe OD:
CAS2215	2	Ø22mm	Ø15mm
CAS2822	2	Ø28mm	Ø22mm
CAS2815	2	Ø28mm	Ø15mm

**J**

**J 22mm Equal Water Trap Tee**
**Model No. CAS22WTT**

Stops water reaching air tools, spray guns, etc.

Pipe OD:	Ø22mm
Pack Qty:	1

**K**

**K Brass Straight Adaptors**
**Model No. SEE BELOW**

Converts pipe end to male thread.

Model No:	Pack Qty:	Pipe OD:	Stem OD:
CAS15BSA	1	Ø15mm	Ø1/2"BSPT
CAS22BSA	1	Ø22mm	Ø3/4"BSPT
CAS28BSA	1	Ø28mm	Ø1"BSPT

**L**

**L Brass Wingback Elbows**
**Model No. SEE BELOW**

Secures termination of pipe run at workstation.

Model No:	Pack Qty:	Pipe OD:	Thread:
CAS15BWE	1	Ø15mm	1/2"BSPT
CAS22BWE	1	Ø22mm	3/4"BSPT

**M**

**M Porting Block 5 x 1/2" BSP Connection**
**Model No. CASPB**

5-Way junction block with 1/2"BSPT connections. Supplied with three blanking plugs.

Connection:	5 x 1/2"BSPT
Pack Qty:	1



## 788 Air Line Couplings



### PCL Couplings & Adaptors

Manufactured in the UK. Ideal for workshop/engineering use with all types of wrenches, sanders and grinders. Adaptors will fit Vertex slim type coupling bodies. Free airflow rate at 100psi(7bar): 35-43cfm(991-1218L/min).



**A**



#### **A** Couplings - Male Thread

Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC01	Male Thread	1/4"BSPT	1
ACP01	Male Thread	1/4"BSPT	5
AC01BP	Male Thread	1/4"BSPT	50
AC62	Male Thread	3/8"BSPT	1
AC63	Male Thread	1/2"BSPT	1

**B**



#### **B** Couplings - Female Thread

Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC13	Female Thread	1/4"BSPT	1
ACP13	Female Thread	1/4"BSPT	5
AC13BP	Female Thread	1/4"BSPT	50
AC64	Female Thread	3/8"BSPT	1
AC65	Female Thread	1/2"BSPT	1

**C**



#### **C** Couplings - Tailpiece

Model No. [SEE BELOW](#)

Model No:	Type:	Hose Size:	Pack Qty:
AC66	Tailpiece	5/16" Bore	1
AC67	Tailpiece	3/8" Bore	1

**D**



#### **D** Adaptors - Male Thread

Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC04	Male Thread	1/4"BSPT	5
ACP04	Male Thread	1/4"BSPT	15
AC04BP	Male Thread	1/4"BSPT	100
AC19	Male Thread	3/8"BSPT	5
AC68	Male Thread	1/2"BSPT	5

**E**



#### **E** Adaptors - Female Thread

Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC18	Female Thread	1/4"BSPT	5
ACP18	Female Thread	1/4"BSPT	15
AC18BP	Female Thread	1/4"BSPT	100
AC69	Female Thread	3/8"BSPT	5
AC70	Female Thread	1/2"BSPT	5

**F**



#### **F** Adaptors - Tailpiece

Model No. [SEE BELOW](#)

Model No:	Type:	Hose Size:	Pack Qty:
AC20	Tailpiece	3/16" Bore	5
AC06	Tailpiece	1/4" Bore	5
AC21	Tailpiece	5/16" Bore	5
AC07	Tailpiece	3/8" Bore	5
AC71	Tailpiece	1/2" Bore	5

**G**




#### **G** Double End Tailpieces

Model No. [SEE BELOW](#)

Model No:	Hose Size:	Pack Qty:
AC10	1/4" Bore	5
AC50	5/16" Bore	5
AC11	3/8" Bore	5
AC51	1/2" Bore	2

**H**




#### **H** Tailpieces - Male Thread

Model No. [SEE BELOW](#)

Model No:	Thread Size:	Hose Size:	Pack Qty:
AC38	1/4"BSPT	3/16" Bore	5
AC08	1/4"BSPT	1/4" Bore	5
AC39	1/4"BSPT	5/16" Bore	5
AC09	1/4"BSPT	3/8" Bore	5
AC40	1/4"BSPT	1/2" Bore	5
AC41	3/8"BSPT	3/8" Bore	5
AC42	3/8"BSPT	1/2" Bore	5

**I**



#### **I** Coned Tailpieces


Model No. [SEE BELOW](#)

Model No:	Hose Size:	Union Nut Size:	Pack Qty:
AC44	1/4" Bore	1/4"BSPT	5
AC45	5/16" Bore	1/4"BSPT	5
AC46	3/8" Bore	1/4"BSPT	5

**J**



**K**



#### **J** 1/4"BSPT Double Union

Model No. [AC12](#)

Type:	Male Thread
Thread Size:	1/4"BSPT
Pack Qty:	5

#### **K** Union Nuts

Model No. [SEE BELOW](#)

Model No:	Thread Size:	Pack Qty:
AC48	1/4"BSPT	5
AC49	3/8"BSPT	5
AC52	1/4"BSPT	3

AC52 fits AC46 only.

**L**



#### **L** 1/4"BSPT Air Tool Coupling Kit

Model No. [AC61](#)

Kit comprising of female threaded coupling body and male threaded adaptor. Fitted with 1/4"BSPT threads. Suitable for most air tool applications. Use in conjunction with whip/leader hose assembly, Model No. [AH2R](#).

Thread Size:	1/4"BSPT
Pack Qty:	2pc Kit

**M**



#### **M** 1/4"BSPT Air Tool Coupling Kit

Model No. [AC60](#)

Kit comprising of male threaded coupling body together with male and female threaded adaptors. Fitted with 1/4"BSPT threads. Suitable for most air tool applications.

Thread Size:	1/4"BSPT
Pack Qty:	3pc Kit



SealeyTools



@sealeytools



Sealey Tools



@sealeytools



Sealey Tools



@sealeytools

**A - D PCL Vertex Couplings**
**Model No. SEE BELOW**

Manufactured in the UK. Slim profile bodies suitable for trailing hose applications such as portable garage and workshop tools. Compatible with standard coupling adaptors. Free airflow rate at 100psi(7bar): 35-43cfm (991-1218L/min).


**A**

**A Couplings - Male Thread**
**Model No. SEE BELOW**

Model No:	Type:	Thread Size:	Pack Qty:
AC16	Male Thread	1/4"BSPT	1
ACP16	Male Thread	1/4"BSPT	5
AC16BP	Male Thread	1/4"BSPT	50
AC72	Male Thread	3/8"BSPT	1
AC73	Male Thread	1/2"BSPT	1

**B**

**B Couplings - Female Thread**
**Model No. SEE BELOW**

Model No:	Type:	Thread Size:	Pack Qty:
AC15	Female Thread	1/4"BSP	1
ACP15	Female Thread	1/4"BSP	5
AC15BP	Female Thread	1/4"BSP	50
AC74	Female Thread	3/8"BSP	1
AC75	Female Thread	1/2"BSP	1

**E**

**E 110pc Air Coupling Kit**
**Model No. AC110K**


Popular selection of air line couplings, hose connections and adaptors. Ideal for air supply system maintenance and service engineers, as well as van and countertop sales. Supplied in a storage case.

**Contents:** Coupling Male 1/4"BSPT (x10), Coupling Female 1/4"BSP (x10), Adaptor Male 1/4"BSPT (x20), Adaptor Female 1/4"BSP (x15), Adaptor Tailpiece 1/4" Bore Hose (x10), Tailpiece Male 1/4"BSPT - 1/4" Hose (x10), Tailpiece Male 1/4"BSPT - 3/8" Hose (x10), Double Male Union 1/4"BSPT to 1/4"BSPT (x10), Adaptor 1/2"BSPT Male to 1/4"BSP Female (x15)

**C**

**C Couplings - Tailpiece**
**Model No. SEE BELOW**

Model No:	Type:	Hose Size:	Pack Qty:
AC76	Tailpiece	5/16" Bore	1
AC77	Tailpiece	3/8" Bore	1

**D**

**D Twin Couplings - Y-Adaptor**
**Model No. SEE BELOW**

Model No:	Type:	Pack Qty:
AC55	Vertex	1
AC87	Standard	1



All PCL Couplings are manufactured in Great Britain.


**F - I PCL 100 Series Couplings**
**Model No. SEE BELOW**

Manufactured in the UK. Suitable for applications where greater airflow rates are required. Ideal for industrial applications and for use on heavy portable tools such as 3/4" and 1" air impact wrenches. Compatible only with 100 Series coupling adaptors. Free airflow rate at 100psi(7bar): 100-117cfm(2832-3313L/min).


**F**

**F Coupling - Male Thread**
**Model No. AC23**

Type:	Thread Size:	Pack Qty:
Male Thread	1/2"BSPT	1

**G**

**G Coupling - Female Thread**
**Model No. AC22**

Type:	Thread Size:	Pack Qty:
Female Thread	1/2"BSP	1

**J**


**Safeflow**
**J Safety Coupling - Male Thread**
**Model No. AC56**

Type:	Thread Size:	Pack Qty:
Male Thread	1/4"BSPT	1

**K**

**Safeflow**
**K Safety Coupling - Female Thread**
**Model No. AC57**

Type:	Thread Size:	Pack Qty:
Female Thread	1/4"BSP	1

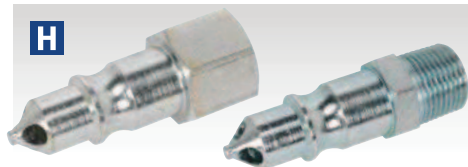**H**

**H Adaptors**
**Model No. SEE BELOW**

Model No:	Type:	Thread Size:	Pack Qty:
AC24	Female Thread	3/8"BSP	2
AC25	Male Thread	3/8"BSPT	2
AC26	Male Thread	1/2"BSPT	2

**I**

**I Adaptors - Tailpiece**
**Model No. SEE BELOW**

Model No:	Type:	Hose Size:	Pack Qty:
AC27	Tailpiece	1/2" Bore	2
AC28	Tailpiece	3/8" Bore	2

For our full range of Air Hoses, see pages 792 to 796



## 790 Air Line Couplings



### A - F PCL XF Vertex Couplings & Adaptors

Model No. [SEE BELOW](#)

Manufactured in the UK. High Flow Rate enhances tool efficiency. Hardened steel construction with corrosive resistant finish. Compatible only with XF coupling adaptors. Free airflow rate at 100psi(7bar): 100-130cfm(2832-3681L/min).



**A** Couplings - Male Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC30	Male Thread	1/4"BSPT	1
AC32	Male Thread	3/8"BSPT	1
AC78	Male Thread	1/2"BSPT	1



**B** Couplings - Female Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC29	Female Thread	1/4"BSP	1
AC31	Female Thread	3/8"BSP	1
AC79	Female Thread	1/2"BSP	1



**C** Couplings - Tailpieces  
Model No. [SEE BELOW](#)

Model No:	Type:	Hose Size:	Pack Qty:
AC80	Tailpiece	5/16" Bore	1
AC81	Tailpiece	3/8" Bore	1
AC82	Tailpiece	1/2" Bore	1



**D** Adaptors - Male Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC34	Male Thread	1/4"BSPT	2
AC83	Male Thread	3/8"BSPT	2
AC84	Male Thread	1/2"BSPT	2



**E** Adaptors - Female Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
AC33	Female Thread	1/4"BSP	2
AC85	Female Thread	3/8"BSP	2
AC86	Female Thread	1/2"BSP	2



**F** Adaptors - Tailpieces  
Model No. [SEE BELOW](#)

Model No:	Hose Size:	Pack Qty:
AC35	5/16" Bore	2
AC36	3/8" Bore	2
AC37	1/2" Bore	2

### G - L Economy Airline Couplings

Model No. [SEE BELOW](#)

Economy fittings, compatible with UK style couplings. Ideal for general workshop use with all types of air tool. Good value for money. Free airflow rate at 100psi(7bar): 35-40cfm(991-1133L/min).



**G** Couplings - Male Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
ACX01	Male Thread	1/4"BSPT	1
ACX01BP	Male Thread	1/4"BSPT	25



**H** Couplings - Female Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
ACX13	Female Thread	1/4"BSP	1
ACX13BP	Female Thread	1/4"BSP	25




**I** Twin Coupling - Y-Adaptor  
Model No. [ACX55](#)

Pack Qty:
1



**J** Adaptors - Male Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
ACX04	Male Thread	1/4"BSPT	5
ACX04BP	Male Thread	1/4"BSPT	50

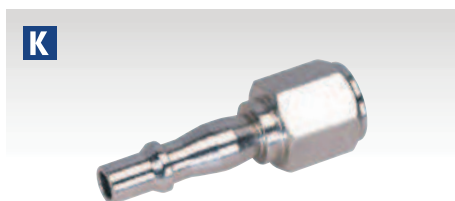

**K** Adaptors - Female Thread  
Model No. [SEE BELOW](#)

Model No:	Type:	Thread Size:	Pack Qty:
ACX18	Female Thread	1/4"BSP	5
ACX18BP	Female Thread	1/4"BSP	50



**L** 1/4" BSP Air Tool Coupling Kit  
Model No. [ACX60](#)

Kit comprises male threaded coupling body together with male and female threaded adaptors. Fitted with 1/4" BSP threads. Suitable for most air tool applications.

Thread Size:	1/4" BSP
Pack Qty:	3pc Kit



SealeyTools



@sealeytools



Sealey Tools



@sealeytools



Sealey Tools



@sealeytools

**A**

**A 1/4\"/>**

Kit comprises male threaded coupling body together with male and female threaded adaptors. Fitted with 1/4\"/>

<b>Thread Size:</b>	1/4\"/>
<b>Pack Qty:</b>	3pc Kit

**D**

**D 1/4\"/>**

Oil mist lubrication for all 1/4\"/>

<b>Maximum Pressure:</b>	120psi
--------------------------	--------

**G**

**G 1/4\"/>**

Swivel adaptor allows for greater freedom of movement when connected to an air line. Free airflow rate at 100psi(7bar): 35-40cfm(991-1133L/min).

<b>Type:</b>	Female Thread
<b>Thread Size:</b>	1/4\"/>
<b>Pack Qty:</b>	1

**H**

**H 1/4\"/>**

Swivel adaptor allows for greater freedom of movement when connected to an air line. Free airflow rate at 100psi(7bar): 35-40cfm(991-1133L/min).

<b>Type:</b>	Male Thread
<b>Thread Size:</b>	1/4\"/>
<b>Pack Qty:</b>	1

**B**

**B 1/4\"/>**

Suitable for all air tools with 1/4\"/>

<b>Inlet Size:</b>	1/4\"/>
<b>Outlet Size:</b>	1/4\"/>

**E**

**BULK  
PACK**
**E Air Tool Oil**  
**Model No. SEE BELOW**

Maintain your air tools with a quality high performance air tool oil containing mineral lubricants and detergents.

<b>Model No:</b>	<b>Pack Qty:</b>	<b>Size:</b>
<b>ATO/500</b>	12	500ml
<b>ATO500S</b>	1	500ml
<b>ATO/1000</b>	12	1L
<b>ATO1000S</b>	1	1L

**I**

**I 1/4\"/>**

Lever style ball valve with male (1/4\"/>

<b>Type:</b>	1/4\"/>
--------------	---------

**C**

**C 1/4\"/>**

Suitable for all air tools with 1/4\"/>

<b>Inlet Size:</b>	1/4\"/>
<b>Outlet Size:</b>	1/4\"/>

**F**

**F Double Unions & Adaptors**  
**Model No. SEE BELOW**

<b>Model No:</b>	<b>Type:</b>
<b>SA1/1414</b>	1/4\"/>
<b>SA1/1212</b>	1/2\"/>
<b>SA1/1414FF</b>	1/4\"/>
<b>SA1/1438F</b>	1/4\"/>
<b>SA1/1412F</b>	1/4\"/>
<b>SA1/3814F</b>	3/8\"/>
<b>SA1/1214F</b>	1/2\"/>
<b>SA1/1238F</b>	1/2\"/>
<b>SA1/1234</b>	1/2\"/>
<b>SA1/3412F</b>	3/4\"/>

**J**

**J 3/8\"/>**

Lever style ball valve with female (3/8\"/>

<b>Type:</b>	3/8\"/>
--------------	---------

## 792 Retractable Air Hose Reels



### A - D Workshop Series Retractable PU Air Hose Reels

Model No. **SEE BELOW**

Heavy-duty polypropylene casing. Double braided polyurethane hose reels fitted with 1/4"BSP female inlets and 1/4"BSPT male outlets. Features auto-layering mechanism which distributes air hose evenly back into the reel housing preventing it from jamming. Supplied with mounting bracket and fixing kit for attachment onto walls or ceilings.

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>
Model No:	SA811	SA812	SA813	SA814
Hose Length:	6.5m	12m	10m	15m
Hose Size (ID/OD):	Ø6.5/10mm	Ø6.5/10mm	Ø8/12mm	Ø8/12mm
Maximum Pressure:	150psi	150psi	150psi	150psi
Inlet-Outlet:	1/4"BSP	1/4"BSP	1/4"BSP	1/4"BSP

### E Workshop Air Filter/Regulator/Lubricator

Model No. **SA2001**

For full details see page 784.



### F - G Workshop Series Retractable PU Air Hose Reels

Model No. **SEE BELOW**

Hard-wearing, composite cased, retracting air hose reels supplied with heavy-duty polyurethane hose. Reels feature ratchet or free-running operation. Supplied with mounting bracket for attachment onto walls or ceilings

	<b>F</b>	<b>G</b>
Model No:	SA894	SA895
Hose Length:	15m	10m
Hose Size (ID/OD):	Ø8/12mm	Ø10/15mm
Maximum Pressure:	150psi	150psi
Inlet-Outlet:	1/4"BSP	3/8"BSP



SealeyTools



@sealeytools



Sealey Tools



@sealeytools




Sealey Tools



@sealeytools

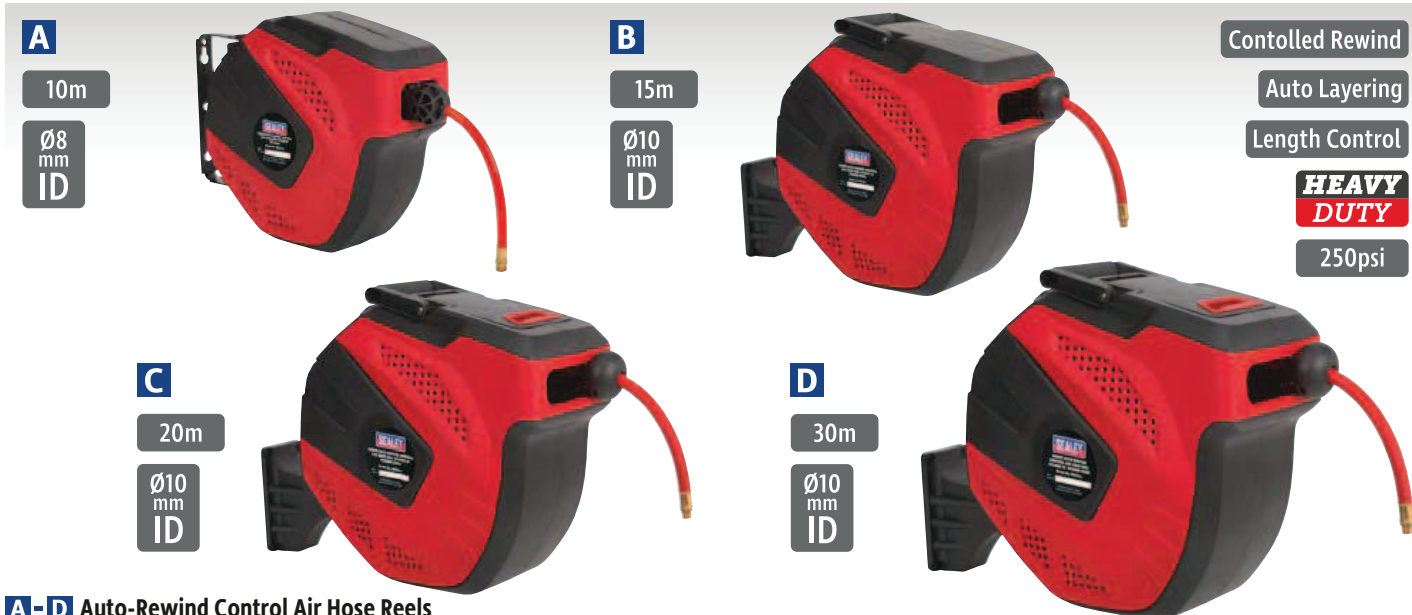


**A - D Auto-Rewind Control Air Hose Reels**
**Model No. SEE BELOW**

Composite housing with heavy-duty wall mounting swivel bracket. Model No. SA821 fitted with high quality Ø8mm ID PU hose. Auto-layering mechanism distributes air hose evenly back into reel housing preventing it from jamming. Suitable for professional garages and workshops. Model No's SA822, SA823 and SA824 supplied with high quality Ø10mm ID rubber hose. Hose can be extended and stopped at any length. Controlled, slow rewind which, unlike traditional retractable reels, returns the air hose at a safe speed. Auto-layering mechanism distributes air hose evenly back into reel housing preventing it from jamming. Suitable for professional garages and workshops.

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>
<b>Model No:</b>	SA821	SA822	SA823	SA824
<b>Hose Length:</b>	10m	15m	20m	30m
<b>Hose Size (ID/OD):</b>	Ø8/12mm	Ø10/16.5mm	Ø10/16.5mm	Ø10/16.5mm
<b>Maximum Pressure:</b>	250psi	250psi	250psi	250psi
<b>Hose Type:</b>	PU	Rubber	Rubber	Rubber
<b>Inlet-Outlet:</b>	1/4"BSP	1/4"BSP	1/4"BSP	1/4"BSP


**E 12m Retractable Air Hose Reel  
Ø8mm ID Polyurethane Hose**
**Model No. SA90**

Robust metal case for heavy-duty applications. TPU (Thermoplastic Polyurethane) Hose can be extended and retracted by simple pull and release mechanism. Supplied with swivel mounting bracket for fixing to wall or ceiling.

<b>Hose Length:</b>	12m
<b>Hose Size (ID/OD):</b>	Ø8/12mm
<b>Maximum Pressure:</b>	280psi
<b>Hose Type:</b>	TPU
<b>Inlet-Outlet:</b>	Ø8mm-1/4"BSP


**F - G Retractable Air Hose Reels**
**Model No. SEE BELOW**

Tough, durable design suitable for professional workshops. Features a solid brass internal spindle for added strength and durability. Auto-rewind mechanism with self layering system provides tangle-free operation. Positive latching at every full revolution of inner drum for hose length control. Fitted with reinforced PVC braided hose. Supplied with heavy-duty swivel mounted wall bracket and 2m inlet hose.

	<b>F</b>	<b>G</b>
<b>Model No:</b>	SA93	SA94
<b>Hose Length:</b>	20m	15m
<b>Hose Size (ID/OD):</b>	Ø10/16mm	Ø12.5/18.5mm
<b>Maximum Pressure:</b>	300psi	300psi
<b>Hose Type:</b>	Reinforced Braided PVC	Reinforced Braided PVC
<b>Inlet-Outlet:</b>	3/8"BSPT	1/2"BSPT

For our Air Supply Ring Main System, see pages 786 to 787

## 794 Retractable Air Hose Reels




**A - C Retractable Air Hose Reels**  
**Ø10mm ID - Rubber Hose**  
**Model No. SEE BELOW**

Heavy-duty steel construction with corrosion resistant powder coated finish. 9-Position guide arm with four non-sag rollers. Multi-position ratchet lock. L-Shaped bracket enables the unit to be wall, floor or ceiling mounted.

	<b>A</b>	<b>B</b>	<b>C</b>
<b>Model No:</b>	<b>SA84</b>	<b>SA841</b>	<b>SA85</b>
<b>Hose Length:</b>	8m	15m	20m
<b>Hose Size (ID/OD):</b>	Ø10/17mm	Ø10/17mm	Ø10/17mm
<b>Maximum Pressure:</b>	300psi	300psi	300psi
<b>Hose Type:</b>	Rubber	Rubber	Rubber
<b>Inlet-Outlet:</b>	3/8"-1/4"BSP	3/8"-1/4"BSP	3/8"-1/4"BSP

**D Optional Swivel Mounted Plate:** **SA85SP** **SA85SP** **SA85SP**

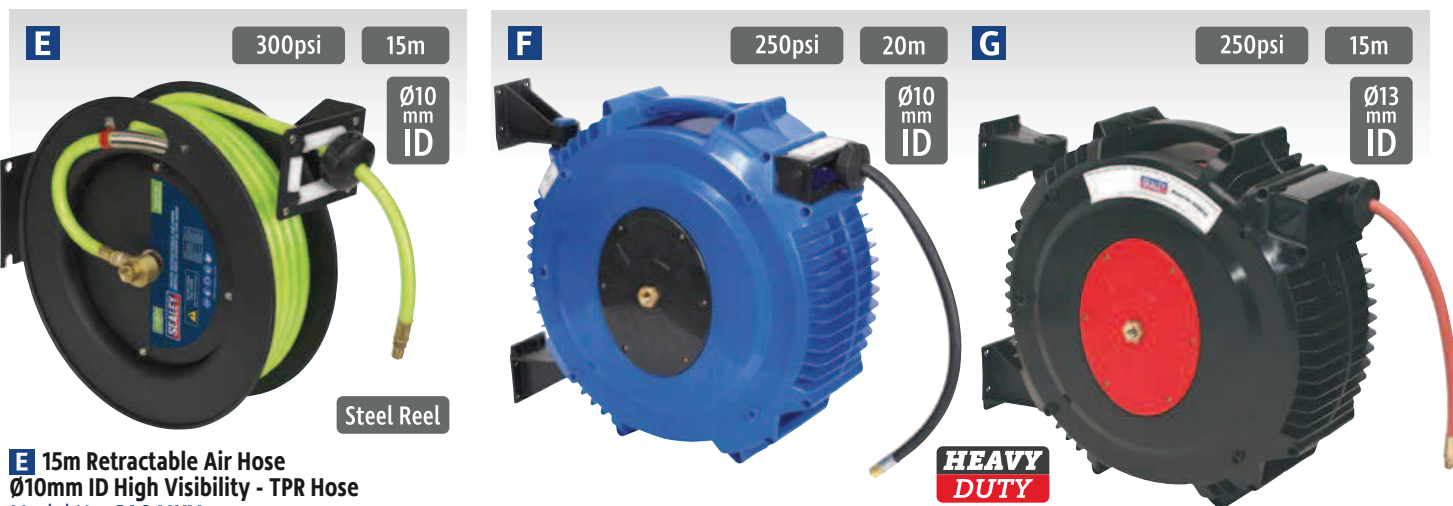

**E 15m Retractable Air Hose**  
**Ø10mm ID High Visibility - TPR Hose**  
**Model No. SA841HV**

Steel construction with corrosion resistant powder coated finish. High visibility TPR air hose for added safety around the workshop. 9-Position guide arm with four non-sag rollers. Multi-position ratchet lock. L-Shaped bracket enables the unit to be wall, floor or ceiling mounted.

<b>Length:</b>	15m
<b>Hose Size (ID/OD):</b>	Ø10/17mm
<b>Maximum Pressure:</b>	300psi
<b>Hose Type:</b>	TPR (PVC Outer)
<b>Inlet-Outlet:</b>	3/8"-1/4"BSP

**D Optional Swivel Mounted Plate:** **SA85SP**

**F - G Retractable Air Hose Reels - Rubber Hose**  
**Model No. SEE BELOW**

Tough, impact resistant, durable composite cases with wall/ceiling mounting bracket. Fitted with high quality rubber hose plus solid brass full flow inlet and outlet swivel connectors.

	<b>F</b>	<b>G</b>
<b>Model No:</b>	<b>SA88</b>	<b>SA8812</b>
<b>Hose Length:</b>	20m	15m
<b>Hose Size (ID/OD):</b>	Ø10/18mm	Ø13/20mm
<b>Maximum Pressure:</b>	250psi	250psi
<b>Hose Type:</b>	Rubber	Rubber
<b>Inlet-Outlet:</b>	3/8"-1/4"BSP	1/2"-1/2"BSP

**A**

 Ø8  
mm  
ID

 Ø10  
mm  
ID

**A Air Leader Hoses with Tailpiece & 1/4" BSP Union**  
**Model No. SEE BELOW**

Rubber hoses for use between air tool and supply point. Avoids vibration damage to couplings. Supplied with tailpiece and 1/4" BSP female union and bend restrictors.

Model No:	Bore:	Length:
AH2R	Ø8mm(5/16")	600mm
AH2R/38	Ø10mm(3/8")	600mm

**B - C Self-Build Hose Clip Sets**  
**Model No. SEE BELOW**

Select band width, cut to length and install using only a screwdriver and a pair of pliers. Never have the wrong sized hose clamp again. Set includes a length of banding and a selection of worm drive tension clips.

**B**
**C**

Model No:	JC97	JC972
Band Length:	3m	3m
Band Width:	8mm	12.7mm
Worm Drive Tension Clips:	8pc	8pc

**B - C**

**D**



5m

 Ø5  
mm  
ID

**D 5m x Ø5mm PU Coiled Air Hose Kit with Coupling Kit**  
**Model No. AHK03**

Air hose kit comprising PU coiled air hose fitted with 1/4" BSP female swivel unions, coupling and adaptor set, and PTFE tape.

**Contents:** 5m x Ø5mm ID Air Hose, ACX60 Coupling Kit, 12m x 12mm PTFE Tape

**E**

**F**

**G**

**H - I**

**E - I Coiled Air Hoses**  
**Model No. SEE BELOW**

Polyethylene recoil type hose helps to keep working area tidy and free of hoses when not in use. Fitted with quick release coupling and coupling body or 1/4" BSP swivel unions.

Model No:	Bore:	Length:	Fittings:
E SA305	Ø5mm	5m	Quick Release
F SA335	Ø5mm	5m	1/4" BSP Unions
G SA335G	Ø5mm	5m	1/4" BSP Unions
H AH10C/6	Ø6mm	10m	1/4" BSP Unions
I AH10C/8	Ø8mm	10m	1/4" BSP Unions

**J**


15m

 Ø8  
mm  
ID

**J 15m x Ø8mm Air Hose Kit with Connectors**  
**Model No. AHK01**

Air hose kit comprising rubber alloy air hose fitted with 1/4" BSP female swivel unions manufactured to EN 5774, PCL Vertex coupling with adaptor set and PTFE tape.

**Contents:** 15m x Ø8mm ID Air Hose, 1/4" BSP Female Coupling Body, 1/4" BSP Female Screwed Adaptor, 1/4" BSPT Male Coupling Body, 1/4" BSPT Male Screwed Adaptor, 12m x 12mm PTFE Tape

**K**


15m

 Ø10  
mm  
ID

**HEAVY  
DUTY**
**K 15m x Ø10mm Heavy-Duty Air Hose Kit with Connectors**  
**Model No. AHK02**

Heavy-duty air hose kit comprising rubber air hose fitted with 1/4" BSP female swivel unions, rubber leader hose fitted with tailpiece and 1/4" BSP female swivel union both manufactured to EN 2398, PCL Vertex coupling with adaptor set and PTFE tape.

**Contents:** 15m x Ø10mm ID Air Hose, 600mm x 10mm ID Leader Hose, 1/4" BSP Female Coupling Body, 1/4" BSP Female Screwed Adaptor, 1/4" BSPT Male Coupling Body, 1/4" BSPT Male Screwed Adaptor, 1/4" BSPT Double Union, 12m x 12mm PTFE Tape

**L**


15m

 Ø13  
mm  
ID

**L 15m x Ø13mm High Flow Air Hose Kit with 100 Series Adaptors**  
**Model No. AHK04**

Air hose kit comprising professional high quality rubber air hose fitted with 1/2" BSP female swivel unions manufactured to EN 2398, PCL 100 Series coupling, adaptor and PTFE tape. Guaranteed silicon-free for use in the bodyshop.

**Contents:** 15m x Ø13mm ID Air Hose, 1/2" BSPT Female 100 Series Coupling Body, 1/2" BSPT 100 Series Adapter, 12m x 12mm PTFE Tape





**A** Air Hoses with 1/4" BSP Unions  
Model No. [SEE BELOW](#)

Manufactured in the UK in accordance to EN 5774. Rubber alloy air hose suitable for garage and bodyshop applications. Fitted with 1/4" BSP female swivel unions. Available with both Ø8mm(5/16") or Ø10mm(3/8") bores in various lengths.

Model No:	Bore:	Length:
AHC5	Ø8mm(5/16")	5m
AHC10	Ø8mm(5/16")	10m
AHC15	Ø8mm(5/16")	15m
AHC20	Ø8mm(5/16")	20m
AHC538	Ø10mm(3/8")	5m
AHC1038	Ø10mm(3/8")	10m
AHC1538	Ø10mm(3/8")	15m
AHC2038	Ø10mm(3/8")	20m



**B** Heavy-Duty Air Hoses with 1/4" BSP Unions  
Model No. [SEE BELOW](#)

Manufactured in the UK in accordance to EN 5774. Rubber alloy air hose suitable for garage or bodyshop applications. Fitted with 1/4" BSP female swivel unions. Black hose available with both Ø8mm(5/16") or Ø10mm(3/8") bores in various lengths.

Model No:	Bore:	Length:
AH5RX	Ø8mm(5/16")	5m
AH10RX	Ø8mm(5/16")	10m
AH15RX	Ø8mm(5/16")	15m
AH20RX	Ø8mm(5/16")	20m
AH30RX	Ø8mm(5/16")	30m
AH5RX/38	Ø10mm(3/8")	5m
AH10RX/38	Ø10mm(3/8")	10m
AH15RX/38	Ø10mm(3/8")	15m
AH20RX/38	Ø10mm(3/8")	20m
AH30RX/38	Ø10mm(3/8")	30m



**C** Extra Heavy-Duty Air Hoses with 1/4" BSP Unions  
Model No. [SEE BELOW](#)

High quality rubber air hoses manufactured to EN ISO 2398. Cut into preset lengths and fitted with female swivel unions (1/4" BSP on blue 8mm(5/16") and 10mm(3/8") bore, 1/2" BSP on black 13mm(1/2") bore). Guaranteed silicon-free for use in the bodyshop.

Model No:	Bore:	Length:
AH5R	Ø8mm(5/16")	5m
AH10R	Ø8mm(5/16")	10m
AH15R	Ø8mm(5/16")	15m
AH20R	Ø8mm(5/16")	20m
AH5R/38	Ø10mm(3/8")	5m
AH10R/38	Ø10mm(3/8")	10m
AH15R/38	Ø10mm(3/8")	15m
AH20R/38	Ø10mm(3/8")	20m
AH5R/12	Ø13mm(1/2")	5m
AH10R/12	Ø13mm(1/2")	10m
AH15R/12	Ø13mm(1/2")	15m
AH20R/12	Ø13mm(1/2")	20m



**D** High Visibility Air Hoses with 1/4" BSP Unions  
Model No. [SEE BELOW](#)

High visibility for added safety around the workshop and on site. Manufactured in accordance with EN 5774. Features high grade TPR (Thermoplastic Rubber) inner tube and a reinforced PVC outer coating, which remains flexible in low temperatures. Fitted with 1/4" BSP female swivel unions. Silicon-free for use in the bodyshop.

Model No:	Bore:	Length:
AHFC5	Ø8mm(5/16")	5m
AHFC10	Ø8mm(5/16")	10m
AHFC15	Ø8mm(5/16")	15m
AHFC20	Ø8mm(5/16")	20m
AHFC538	Ø10mm(3/8")	5m
AHFC1038	Ø10mm(3/8")	10m
AHFC1538	Ø10mm(3/8")	15m
AHFC2038	Ø10mm(3/8")	20m



**E** High Visibility Hybrid Air Hoses with 1/4" BSP Unions  
Model No. [SEE BELOW](#)

PVC and rubber blend air hose that provides greater flexibility, even in cold temperatures as low as -40°C. High visibility for added safety around the workplace. No memory recoil effect allows the airline to lay flat. Manufactured in accordance with EN 5774. Features high grade TPR (Thermoplastic Rubber) inner tube and outer coating, offering lightweight, superior bend radius and durability. Fitted with 1/4" BSP female swivel unions. Silicon-free for use in the bodyshop.

Model No:	Bore:	Length:
AHHC5	Ø8mm(5/16")	5m
AHHC10	Ø8mm(5/16")	10m
AHHC15	Ø8mm(5/16")	15m
AHHC20	Ø8mm(5/16")	20m
AHHC538	Ø10mm(3/8")	5m
AHHC1038	Ø10mm(3/8")	10m
AHHC1538	Ø10mm(3/8")	15m
AHHC2038	Ø10mm(3/8")	20m



**F** 10m x Ø8mm High Visibility Hybrid Air Hose with 1/4" BSP Unions  
Model No. [AHHC10G](#)

PVC and rubber blend air hose that provides greater flexibility, even in cold temperatures as low as -40°C. High visibility for added safety around the workplace. No memory recoil effect allows the airline to lay flat. Manufactured in accordance with EN 5774. Features high grade TPR (Thermoplastic Rubber) inner tube and outer coating, offering lightweight, superior bend radius and durability. Features bend restrictors which increases the life of the hose. Fitted with 1/4" BSP female swivel unions. Silicon-free for use in the bodyshop.

Bore:	Ø8mm(5/16")
Length:	10m
Fittings:	1/4" BSP