


AB Glue Dispensing Valve

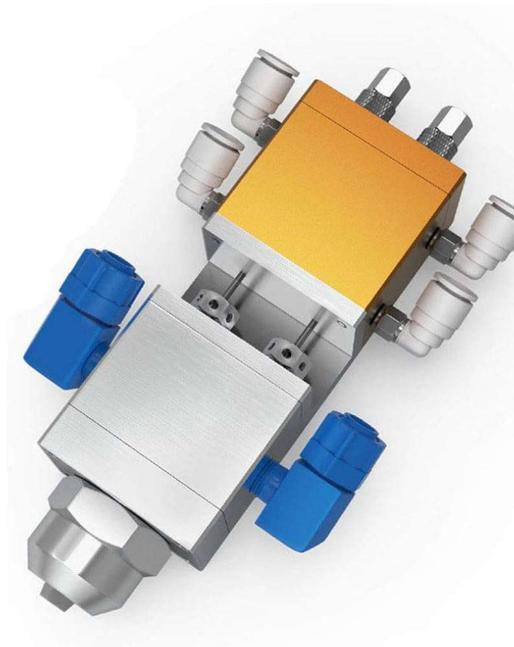

Suitable for surface coating, potting, and processing operations that require AB adhesive on various LED lamps, circuit boards, and electronic product templates.

Fluid Inlet	G1/8 thread
Operating rate	<600/min
Cylinder	Double acting double cylinder
Feeding pressure	<10kg
Use air source	4-7kgf/cm
Operating viscosity	1-100000cps
Main material	Aluminium alloy anode
Outer diameter size	Ø42.3 (H) 132
Minimum Injection amount	0.1ml
Glue mixing ratio	1:1
Glue size	Adjustable size of glue