


ISO: 9001:2015

ISO: 13485:2016

Ambinova **TECHNOLOGIES**



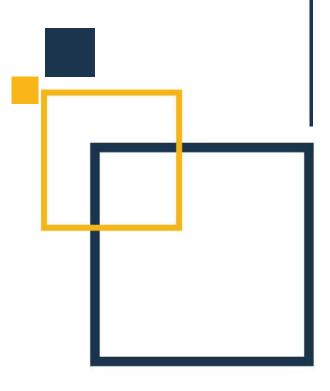



ULTRASONIC CLEANER

KEY FEATURES,

- Advance ultrasonic generator driver circuit to present better cleaning performance and to minimize noise level.
- Innovative industrial ultrasonic transducer with high Q and energy conversion efficiency and long service life.
- Imported high-strength glue, staple-free bonding, and long service life of tank.
- Digital timing for heating control between 1-99 minutes and temperature setting between AMBIENT to 80°C.
- Internal tank fabricated of 1.0mm SUS304 stainless steel to present good performance and long service life.
- Cleaning basket made of 304 stainless steel and electro-polished.
- Outer Shell made of high-quality stainless steel to present good corrosion resistance.

SPECIFICATIONS

Model No	Frequency	Power	Capacity (L)	Timing	Tank Dimension (L*W*H)	Heating Power
AMBI-USC-200	40KHz	70W	2.0	10s-600s Adjustable	150*135*65mm	100W
AMBI-USC-320	40KHz	120W	3.2	1-30 Minutes timing	240*135*100mm	100W
AMBI-USC-680	40KHz	180W	6.8	1-30 Minutes timing	300*150*150mm	200W
AMBI-USC-1100	40KHz	240W	11	1-30 Minutes timing	300*240*150mm	300W
AMBI-USC-2000	40KHz	360W	20	1-30 Minutes timing	300*300*150mm	400W

