
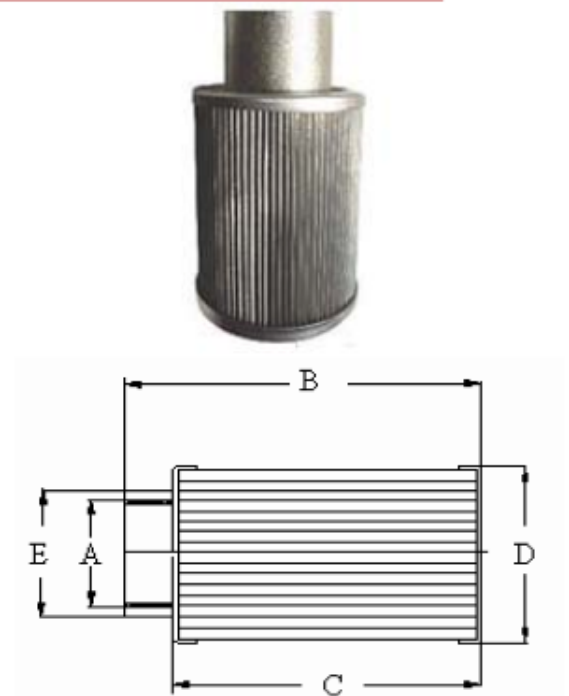


BIG STRAINER

FLUDEN

- REUSABLE SS 100 MESH / 149 MICRON STD
- STURDY ALL METAL STEEL CONSTRUCTION
- CONTINUOUS SPECIAL COMPOUND
- MAX. WORKING TEMP. 80 ° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL
- FLEXIBLE MAGNETIC WRAP AVAILABLE

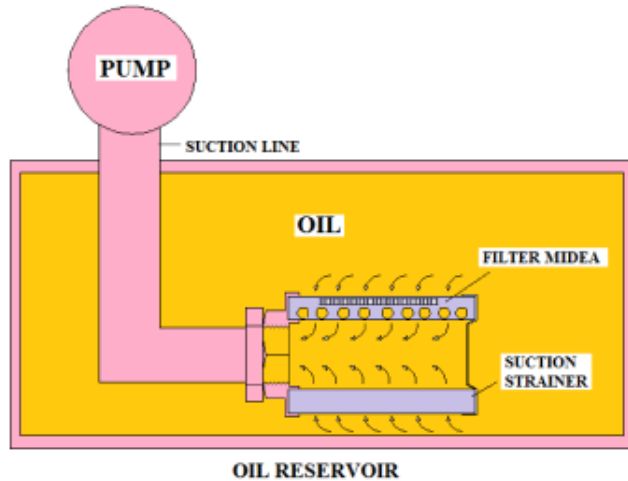

MODEL NO	FLOW LPM	THREAD SIZE A	OVERALL LENGTH B	C TO C LENGTH C	DIA CAP D	NUT DIA E	SCREEN AREA (SQ. IN)	WT. KGS.
SC 2 - 200	800	4"	295	220	200	125	965	4.2
SC 2 - 300	1200	4"	381	306	200	125	1370	4.5
SC 2 - 400	1600	4"	462	387	200	125	1740	4.8
SC 2 - 600	2400	4"	615	540	200	125	2430	5.4

Note :-

*Suction strainer flow handling capacity is recommended 3 to 4 times greater than pump flow handling capacity.

* Tolerance: ± 1 MM

MODEL CODE : ASSEMBLY

SC 2	010			-149
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS OPTIONAL #
SC2		REFER TABLE OMIT OF STD	B - BSP - STD N-NPT OPTIONAL	149 - SS 100 MESH STD 125 - SS 120 MESH 100 - SS 150 MESH 074 - SS 200 MESH 063 - SS 250 MESH Also - 30 / 60 MESH

OMIT IF STANDARAD

CONSULT FACTORY FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY