


- Bonded / Dowty Seals Are Cost Effective Solution For Bolt / Thread Sealing.
- Versatile, Applicable To All Threaded Bolts, Studs and Clearance Holes.
- Sealing Washers Are Available For Metric Whitworth And BSP Threads.
- Bonded / Dowty Seals Are Available In A Large Range Of Elastomers And Metals Available
- Wide Temperature Range.
- Reliable High And Low Pressure Sealing
- Metal Washer Prevents Over – Compression And Extrusion.
- Usable For Overhead Installation.
- Can Be Automatically Installed.
- Seals To Plane Surfaces With No Housing For The Sealing Lip.
- Visible From The Outside.
- No Sweating.
- Bonded / Dowty Seals Are Re – Usable.
- Metal Washer With Vulcanized Sealing Body Of Rubber For Sealing Of Bolt Heads And Flanges.
- Bonded / Dowty Seals Are Available In All European Thread Sizes.

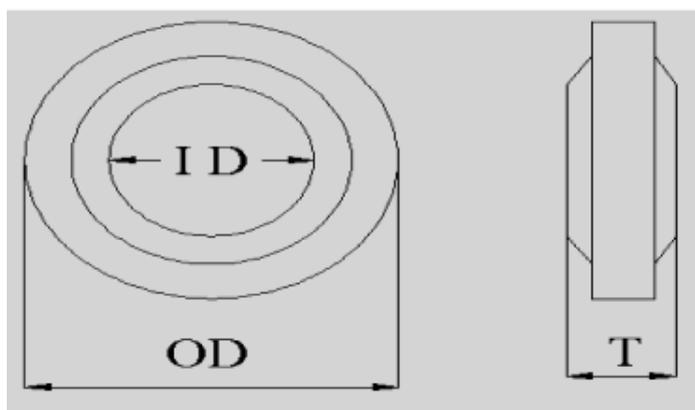

MODEL CODE	SIZE BSP	OUT SIDE DIAMETTER (O D)MM	IN SIDE DIAMETTER (I D)MM	THICKNESS (T)MM
D.S	1/8"	16	10.5	3.5
D.S	1/4"	20.5	13.6	3
D.S	3/8"	24	17	3
D.S	1/2"	28.5	21.3	4
D.S	5/8"	31	24.4	3.5
D.S	3/4"	35	27	3.5
D.S	1"	43	33.9	3.5
D.S	1-1/4"	52.5	42.5	4.5
D.S	1-1/2"	58.5	48	4.5
D.S	1-3/8"	59	47	6
D.S	1-3/4"	68.6	54.74	5.25
D.S	2"	73	60.5	4.5
D.S	2-1/2"	87.6	75.6	6.2
D.S	1-5/8"	63.6	52	4.7

TOLARNCE =  $\pm 0.5$ MM

DIMENSION IN MM FOR REFERANCE ONLY

