


- 'O' RING TYPE CONSTRUCTION
- 5 SIZE 3", 4", 5", 6" & 10" BETWEEN BOLT CENTERS
- FOR NON PRESSURISED TANKS ONLY
- CAN BE MOUNTED ON TAPPED HOLES
- SUITABLE FOR MINERAL / PETROLEUM BASED OILS FOR POLY CARBONATE
- MAXIMUM TEMPERATURE 80° C
- TRANSPERENT POLYMIDE MATERIAL IS AVILBLE FOR USE WITH MINERAL/PETROLEUM & WATER BASED FLUIDS. ANY CONTACT WITH ALCOHAL OR SOLVENTS MUST BE AVOIDED .

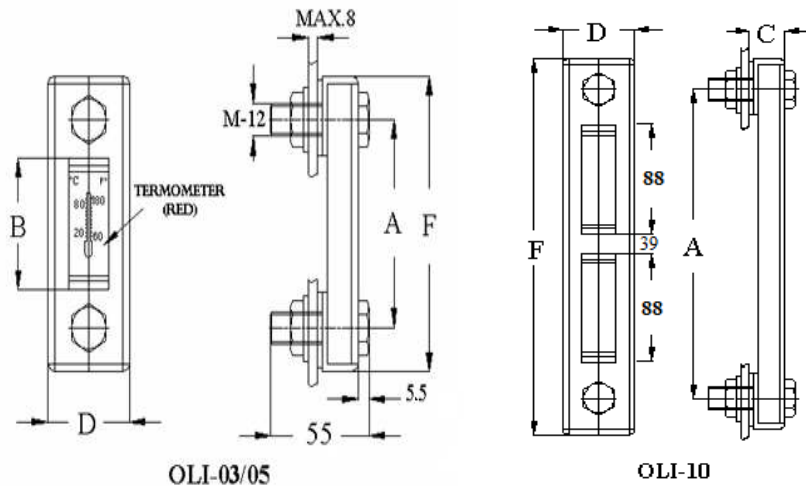

| MODEL    | A     | B   | C  | D  | F     | WT<br>KGS |
|----------|-------|-----|----|----|-------|-----------|
| OLI - 03 | 76.2  | 37  | 21 | 37 | 109   | 0.16      |
| OLI - 05 | 127.5 | 88  | 21 | 37 | 161.  | 0.18      |
| OLI - 10 | 254.0 | 215 | 21 | 37 | 286.5 | 0.28      |
| OLI - 04 | 101.6 | 63  | 21 | 36 | 135.0 |           |
| OLI - 06 | 152.4 | 115 | 21 | 36 | 186.0 |           |

\* Tolerance:  $\pm 1$  MM

| OLI<br>SERIES | 5<br>SIZE<br>INCH | T<br>FEATURE<br>OPTIONAL #                   | M 10<br>FEATURE<br>SPECIAL #    |
|---------------|-------------------|----------------------------------------------|---------------------------------|
|               | 03 - 3"           |                                              | M 12 - STD<br>(M12 X 1.75 BOLT) |
|               | 04 - 4"           |                                              |                                 |
|               |                   |                                              | M 10 - SPECIAL<br>(M12 X 1.50)  |
| OLI           | 05 - 5"           | T - THERMOMETER<br>BOLT) ( OMIT IF NOT REQD) |                                 |
|               | 06 - 6"           |                                              |                                 |
|               | 10 - 10"          |                                              |                                 |

# OPTIONAL / SPECIAL FEATURE – OMIT IF NOT REQUIRED

DIMENSIONS IN MM FOR REFERENCE ONLY

