
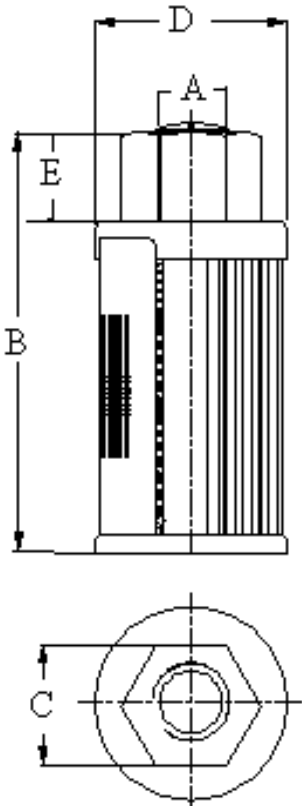


- REUSABLE SS 100 MESH / 149 MICRON STD
- ALUMINIUM DIE CAST NUT
- CONTINUOUS BONDING
- MAX. WORKING TEMP. 80 ° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL

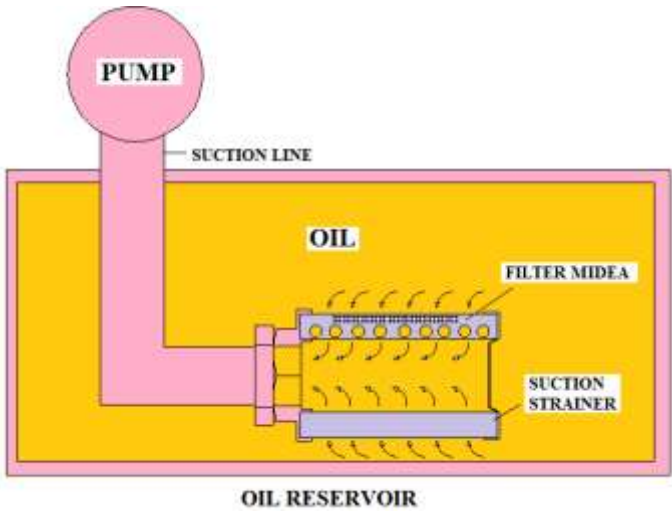

MODEL NO.	PUMP FLOW LPM	STRAINER FLOW CAPACITY LPM	THREAD SIZE A	OVER ALL LENTH B	NUT A/F C	CAP DIA D	NUT LENTH E	SCREEN AREA (SQ.IN)	WEIGHT KGS
STR4	2	8	1/4"	90	22	45		70	0.1
STR4	3	12	3/8"	90	25	45		70	0.1
STR4	5	20	1/2"	105	32	45		83	0.15
STR4	7	28	3/4"	108	36	63	15	106	0.17
STR4	10	40	1"	137	45	63	15	143	0.2
STR4	15	60	1- 1/4"	139	51	85	13	167	0.27
STR4	20	80	1-1/2"	168	60	85	14	210	0.31
STR4	30	120	1- 1/2"	200	60	85	14	255	0.34
STR4	40	160	2"	222	70	100	15	314	0.45
STR4	50	200	2"	260	70	100	15	353	0.47
STR4	75	300	2-1/2"	213	90	150	25	390	1.05
STR4	100	400	3"	278	100	150	25	531	1.19
STR4	150	600	3"	348	100	150	25	683	1.35

Note: -
*Suction strainer flow handling capacity is recommended 3 to 4 times greater than pump flow handling capacity.
*Tolerance: ± 1.0MM

MODEL CODE: ASSEMBLY

STR4	-0 1 0	_**	_ **	_ **
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS. OPTIONAL #
STR4			B-BSPP – STD N-NPT - OPTIONAL	149 - SS 100 MESH STD 125 – SS 120 MESH 100 – SS 150 MESH 074 – SS 200 MESH 063 – SS 250 MESH ALSO -30 / 60 MESH (OMT IF STD).

OMIT IF STANDARAD

CONSULT FACTORY FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY