


- Special polyamide techno polymer or orange marked "OLI" black threaded Connector, Resistant to solvents, Oil, Greases and other Chemical agents.
- Flat NBR synthetic packing ring.
- Maximum temperature 100 °C.
- Type TBP with "Foam" air filter, air filtration 40 Microns.
- TBP Breather Plugs come complete with splash guard device that prevents oil loss.
- Especially suitable for use where oil is agitated violently and could be splashed Against breather cap.

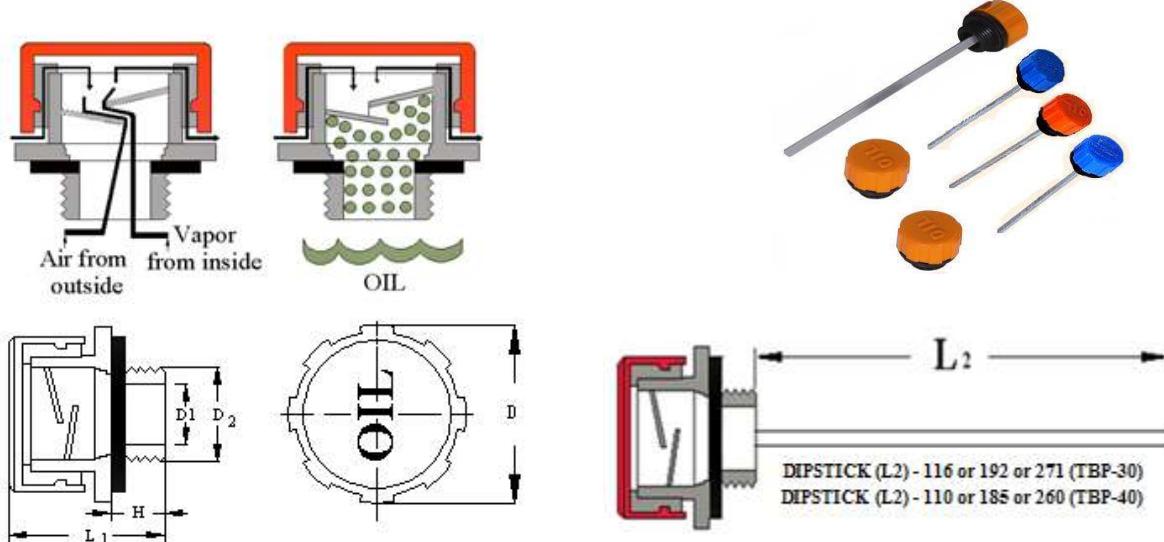

Standard Element	Main Dimensions						Weight
	Description	D2	H	D	L1 mm	D1 mm	
			mm	mm		Grams	
TBP - 30 -16 X 1.5	M 16 X 1.5	10	31	31	31	10	8
TBP - 30 -18 X 1.5	M 18 X 1.5	10	31	31	31	11	10
TBP - 30 - 20 X 1.5	M 20 X 1.5	10	31	31	31	12.5	10
TBP - 30 - 22 X 1.5	M 22 X 1.5	10	31	31	31	10	12
TBP - 30 X 1/4	1/4 BSP	9	31	30	30	8	10
TBP - 30 X 3/8	3/8 BSP	8	31	29	29	10	10
TBP -30 X 1/2	1/2 BSP	11	31	31	31	13	10
TBP - 40 X 3/8	3/8 BSP	13	42	38	38	10	20
TBP - 40 X 1/2	1/2 BSP	13	42	38	38	12	22
TBP - 40 X 3/4	3/4 BSP	13	42	38	38	18	22
TBP - 40 X 1	1 BSP	13	42	38	38	23	22
TBP - 57 X 3/4	3/4 BSP	14	57	42	42	18	40
TBP - 57 X 1	1 BSP	14	57	42	42	23	40
TBP - 57 X 1-1/4	1 - 1/4 BSP	16	57	44	44	28	41
TBP - 57 X 1-1/2	1 - 1/2 BSP	16	57	44	44	28	45
TBP-70 X 2	2 BSP	17	70	59	23	82	

TOLARNCE = ±1 MM

DIMENSIONS IN MM FOR REFERENCE ONLY