
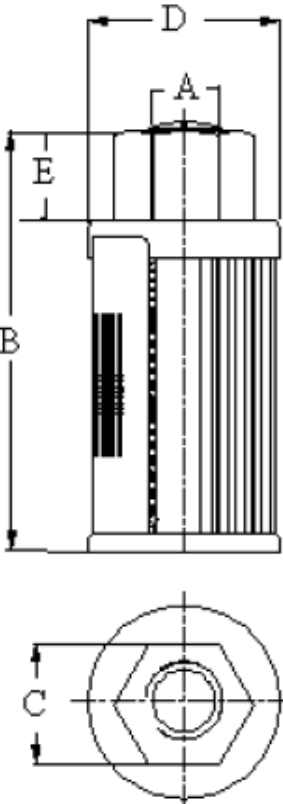


- REUSABLE SS 100 MESH / 149 MICRON STD
- ALUMINIUM DIE CAST NUT
- CONTINUOUS BONDING
- MAX. WORKING TEMP. 80 ° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL

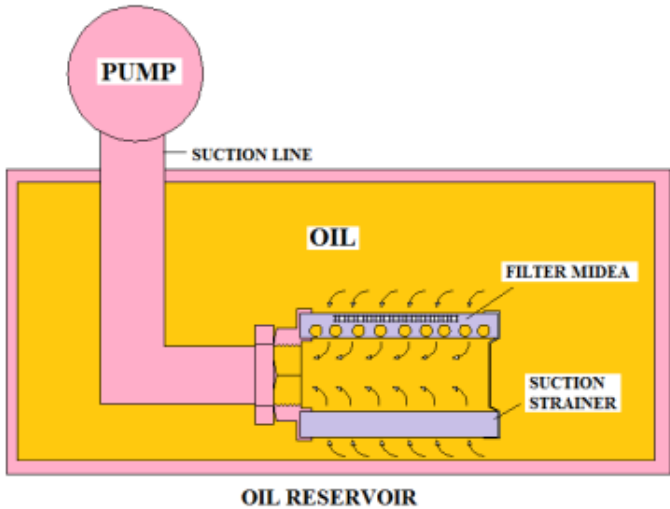

MODEL NO	FLOW LPM	THREAD SIZE	OVERALL LENGTH	NUT A/F	CAP DIA	NUT LENGTH	SCREEN AREA	WT. KGS.
STR4-002	8	1 / 4 "	90	22	45		70	0.10
STR4-003	12	3 / 8 "	90	25	45		70	0.10
STR4-005	20	1 / 2 "	105	32	45		83	0.15
STR4-007	28	3 / 4 "	108	36	63	15	106	0.17
STR4-010	40	1 "	137	45	63	15	143	0.20
STR4-015	60	1 - 1 / 4 "	139	51	85	13	167	0.27
STR4-020	80	1 - 1 / 2 "	168	60	85	14	210	0.31
STR4-030	120	1 - 1 / 2 "	200	60	85	14	255	0.34
STR4-040	160	2 "	222	70	100	15	314	0.45
STR4-050	200	2 "	260	70	100	15	353	0.47
STR4-075	300	2 - 1 / 2 "	213	90	150	25	390	1.05
STR4-100	400	3 "	278	100	150	25	531	1.19
STR4-150	600	3 "	348	100	150	25	683	1.35

Note :-

*Suction strainer flow handling capacity is recommended 3 to 4 times greater than pump flow handling capacity.

*Tolerance : + 1.0MM

MODEL CODE: ASSEMBLY

STR4	-010	_**	_**	_**
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS. OPTIONAL #
STR4			B-BSPP – STD N-NPT - OPTIONAL	149 - SS 100 MESH STD 125 – SS 120 MESH 100 – SS 150 MESH 074 – SS 200 MESH 063 – SS 250 MESH ALSO -30 / 60 MESH (OMT IF STD).

OMIT IF STANDARAD

CONSULT FACTORY FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY