


FLUDEN tube clamp are best known tube clamp with sufficient strength this tube clamps are more suitable where hydraulic pipe lines are required to be straight in short as well as long length. Tube clamps are made out from high density polyethylene materials having good strength and mild steel plates. Tube clamps are in various sizes

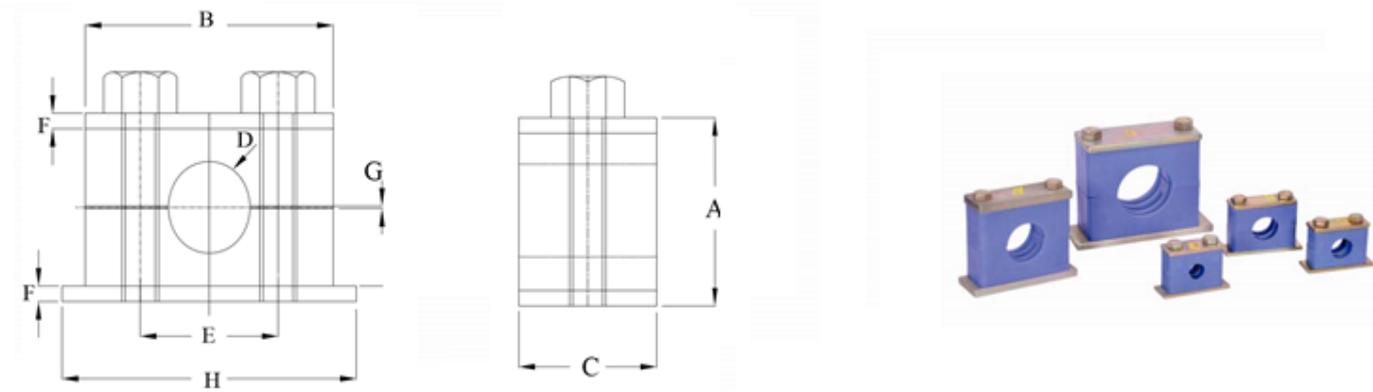

Heavy Mechanical Stress (PCH)

ORDER CODE	A	B	C	D	E	F	G	H	Hex	Round
									Nut	Nut
PCH - 10	47	56	30	10	33	8	0.6	73.5	Y	N
PCH - 12	47	56	30	12	33	8	0.6	73.5	Y	N
PCH - 16	47	56	30	16	33	8	0.6	73.5	Y	N
PCH - 18	47	56	30	18	33	8	0.6	73.5	Y	N
PCH - 20	63	71	30	20	45	8	0.6	86	Y	N
PCH - 22	63	71	30	22	45	8	0.6	86	Y	N
PCH - 25	63	71	30	25	45	8	0.6	86	Y	N
PCH - 26.7	63	71	30	26.7	45	8	0.6	86	Y	N
PCH - 28	63	71	30	28	45	8	0.6	86	Y	N
PCH - 30	74	85	30	30	60	8	0.6	100	Y	N
PCH - 32	74	85	30	32	60	8	0.6	100	Y	N
PCH - 33.7	74	85	30	33	60	8	0.6	100	Y	N
PCH - 35	74	85	30	35	60	8	0.6	100	Y	N
PCH - 38	74	85	30	38	60	8	0.6	100	Y	N
PCH - 42	74	85	30	42	60	8	0.6	100	Y	N
PCH - 48	110	117	45	48	90	10	2.0	130	N	Y
PCH - 50	110	117	45	50	90	10	2.0	130	N	Y
PCH - 60	110	117	45	60	90	10	2.0	130	N	Y
PCH - 63.5	110	117	45	63.5	90	10	2.0	130	N	Y
PCH - 65	110	117	45	65	90	10	2.0	130	N	Y
PCH - 70	110	117	45	70	90	10	2.0	130	N	Y
PCH - 73	140	152	63	73	122	10	2.0	184.5	N	Y
PCH - 75	140	152	63	75	122	10	2.0	184.5	N	Y
PCH - 76.1	140	152	63	76.1	122	10	2.0	184.5	N	Y
PCH - 88.9	140	152	63	88.9	122	10	2.0	184.5	N	Y

PCH - 90	203	206	80	90	168	15	2.0	229	N	Y
PCH - 100	203	206	80	100	168	15	2.0	229	N	Y
PCH - 101.6	203	206	80	101.6	168	15	2.0	229	N	Y
PCH - 108	203	206	80	108	168	15	2.0	229	N	Y
PCH - 114	203	206	80	114	168	15	2.0	229	N	Y
PCH - 133	203	206	80	133	168	15	2.0	229	N	Y
PCH - 140	218	251	90	140	205	15	3.0	272	N	Y
PCH - 152	218	251	90	152	205	15	3.0	272	N	Y
PCH - 165	218	251	90	165	205	15	3.0	272	N	Y
PCH - 168	218	251	90	168	205	15	3.0	272	N	Y

NOTE: FOR MORE SIZE CONTACT FACTORY

Order Code	Tube Clamp	Series	OD (mm)	Material
	PC	X	XX	PP,
		H = Heavy	PP = Poly Propylene	

NOTE : BOLT, NUT ALSO AVIALABLE SS304 & SS3016
Unspecified tolerance ± 1.5 mm

DIMENSIONS IN MM FOR REFERENCE