



DDV CASTORS

CASTORS and WHEELS



CATALOGUE

Moving the World
SINCE 1972



Manufacturers of Rubber,
Plastic & PU Trolley Wheels

VISHAL VERMA
DIRECTOR


+91 9711142401

O-10, Sec-1, DSIDC, Bawana
Industrial Area, Delhi, 110039

sales@ddvcastors.com



SPECIFICATION

Wheel Material	Operating Temperature	Suitable Surface/ Flooring	Hardness	Remarks
<div>Rubber</div> 	0°C to 65°C / 32°F to 150°F	Suitable for rough surfaces like roads. Also, suitable for surface spilled with acidic solvents having less than 10% acidity *Not suitable for surfaces spilled with any kind of oil or grease	88 ± 2	Do not leave the trolley stationary, loaded with more than 50% of load capacity for an extended period of 6 months, this can lead to flat spot. Any kind of contact of wheel with oil or grease can lead to bulging.
<div>Polyurethane</div> 	-15°C to 50°C / 5°F to 122°F	Suitable for smooth surfaces like tile, marble, PCC flooring. Also, suitable for surface spilled with any kind of oil or grease *Not suitable for rough surfaces like roads.	97 ± 2	Does not damage the floor or leave any marks. Suitable for hospitality industry due to silent movement
<div>Polypropylene</div> 	-20°C to 60°C / -4°F to 140°F	Suitable for rough and smooth surfaces *Not suitable for surfaces spilled with any kind of oil or grease. Can cause damage to tile surfaces.	100	Best suitable for warehouse trolleys with heavy loads, or for stationary loading.
<div>Nylon</div> 	-30°C to 95°C / -22°F to 203°F	Suitable for all kinds of surfaces from roads to tile and marble.	98 ± 2	Excellent abrasion resistance.

HEAVY DUTY CASTORS - FAB SERIES

5mm Mild Steel Black Powder Coating Bracket with 20mm Rivet



402SBr-FABS



402UB-FABS



445BB-FABS



402SB-FABS



402SBr-FABF




402UB-FABF



445BB-FABF



402SB-FABF

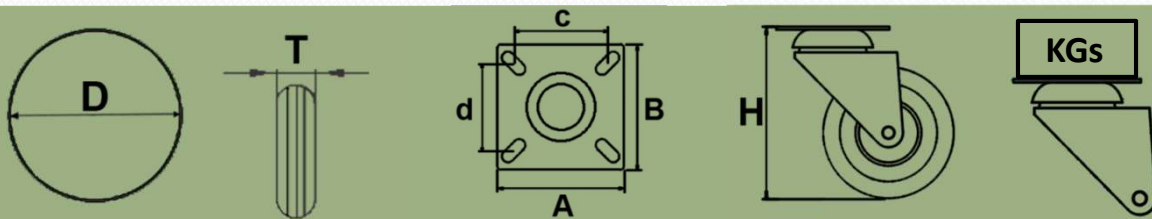

DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
100 mm	50 mm	113	100	72	85	140 mm	750Kg/Set	Polypropylene (Code:SBr/SB)
100 mm	50 mm	113	100	72	85	140 mm	650Kg/Set	Polyurethane (Code: UB)
100 mm	45 mm	113	100	72	85	140 mm	550Kg/Set	Rubber (Code: BB)

HEAVY DUTY CASTORS - FAB SERIES



502SB-FABS



502UB-FABS



502WB-FABS




502SB-FABF



502UB-FABF



502WB-FABF

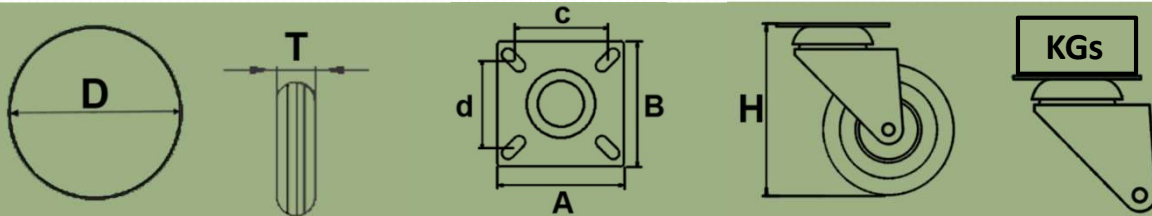

DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
125 mm	50 mm	113	100	72	85	165 mm	800Kg/Set	Polypropylene (Code:SB/WB)
125 mm	50 mm	113	100	72	85	165 mm	750Kg/Set	Polyurethane (Code: UB)

HEAVY DUTY CASTORS - FAB SERIES



602WBr-FABS



602WB-FABS



602UB-FABS



645BB-FABS



602WBr-FABF




602WB-FABF



602UB-FABF



645BB-FABF

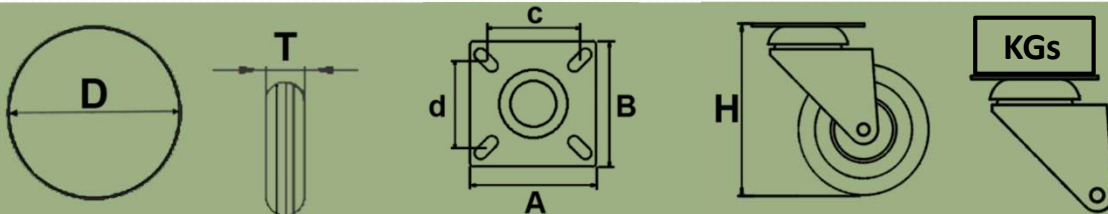

DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
150 mm	50 mm	113	100	72	85	190 mm	800Kg/Set	Polypropylene (Code:WBr/WB)
150 mm	50 mm	113	100	72	85	190 mm	800Kg/Set	Polyurethane (Code: UB)
150 mm	45 mm	113	100	72	85	190 mm	650Kg/Set	Rubber (Code: BB)

HEAVY DUTY CASTORS - FAB SERIES



602SB-FABS



602CIB-FABS



602CIUB-FABS



602HB-FABS



602SB-FABF







602CIB-FABF



602CIUB-FABF



602HB-FABF



DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
150 mm	50 mm	113	100	72	85	190 mm	850Kg/Set	Polypropylene (Code: SB)
150 mm	50 mm	113	100	72	85	190 mm	900Kg/Set	Cast Iron (Code: CIB)
150 mm	50 mm	113	100	72	85	190 mm	900Kg/Set	Polyurethane CI (Code: CIUB)
150 mm	50 mm	113	100	72	85	190 mm	800Kg/Set	UHMW (Code: HB)

HEAVY DUTY CASTORS - FAB SERIES



802WB-FABS



802UB-FABS



802RB-FABS




802WB-FABF



802UB-FABF



802RB-FABF

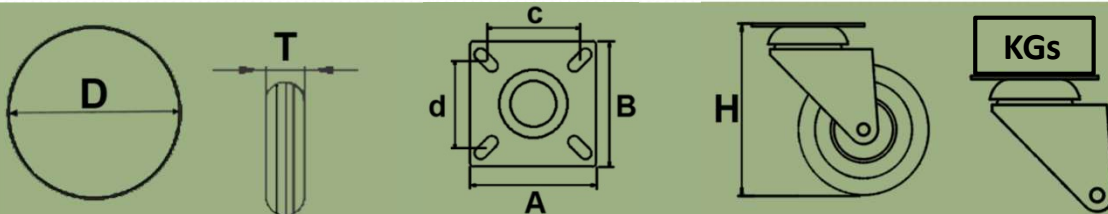

DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
200 mm	50 mm	113	100	72	85	240 mm	800Kg/Set	Polypropylene (Code: WB)
200 mm	50 mm	113	100	72	85	240 mm	800Kg/Set	Polyurethane (Code: UB)
200 mm	50 mm	113	100	72	85	240 mm	700Kg/Set	Rubber (Code: rb)

HEAVY DUTY CASTORS - FAB SERIES



802CIUB-FABS



802SB-FABS



802HB-FABS




802CIUB-FABF



802SB-FABF



802HB-FABF

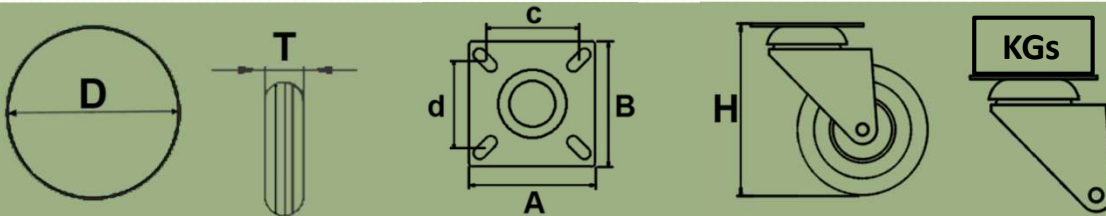

DIAMETER	TREAD	A	B	C	d	HEIGHT	LOAD CAPACITY	MATERIAL
200 mm	50 mm	113	100	72	85	240 mm	900Kg/Set	Polyurethane CI (Code: CIUB)
200 mm	50 mm	113	100	72	85	240 mm	900Kg/Set	Polypropylene (Code: SB)
200 mm	50 mm	113	100	72	85	240 mm	800Kg/Set	UHMW (Code: HB)