



PRODUCT INFORMATION GUIDE



We Are Lubricant Specialist


About Us

Paramox is an experienced and progressive automotive and industrial lubricants manufacturing organization dedicated to providing consistent quality and service to its wide range of customers in pan India and UAE countries.

A group of highly technocrats backed by relevant experience has carefully formulated all Paramox's products from advanced additive technology and carefully selected premium virgin base oils, through rigorous analysis and testing, which are then manufactured to meet and exceed the requirements of national and International standards of respective products, in our state of art oil blending plant following well documented quality assurance program which ensures quality checks , in our well equipped laboratory, right form of raw materials to intermediate stages of production to finished products.

Customer is our first priority and customer's satisfaction is our motto. This philosophy along with your continued support has enabled Paramox Pvt Ltd to show consistent growth year after year its incorporation. We are successfully marketing our products under the trade name "Paramox" which are known for its quality and performance. Our R&D centre is located at Surat and is not only optimizing the existing products with the best performance but also developing a new range of products according to requirement.

KYE OIL CHARACTERISTICS

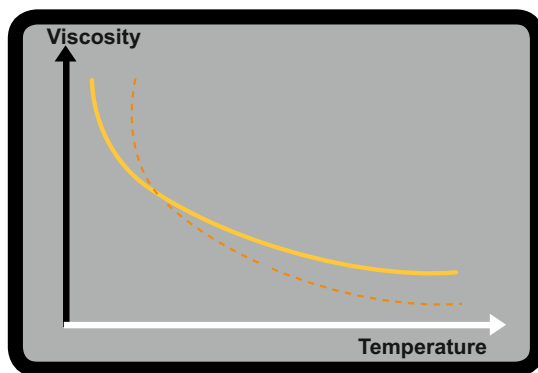

1/ OIL VISCOSITY


Lubricants behave differently at high and low temperatures.

Oil can in effect be characterized by its viscosity, flow resistance or by measuring the thickness of the oilfilm. Viscosity varies according to temperature in the following manner:

The higher the temperature, the more fluid the oil and the lower its viscosity.

This means that if the engine is to perform at its best, the oil must be able to retain its viscosity whatever the heat conditions: it must **stay fluid at cold temperatures** (to allow the engine to start) and **it must be viscous at hot temperatures** (to stop the various moving parts coming into contact with each other).

Lubricant viscosity

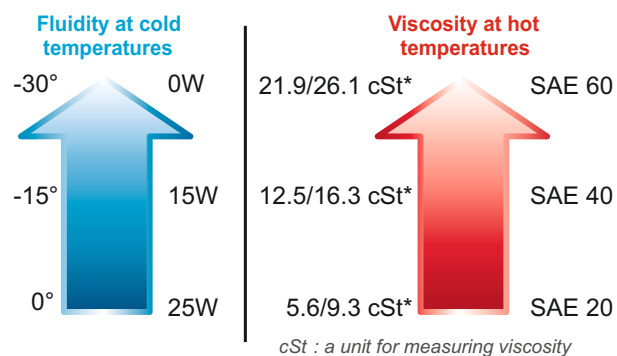


The lower the viscosity at cold temperatures, the more fluid the oil is at low temperatures and can be pumped more easily.

The higher the viscosity at hot temperatures, the more viscous the oil is.

2/ OIL GRADES

The SAE (Society of Automotive Engineers) has created a classification for lubricant grades in order to characterize viscosity at high and low temperatures. The grades are made up of two numbers, between which is the letter W (for Winter grade), as follows:

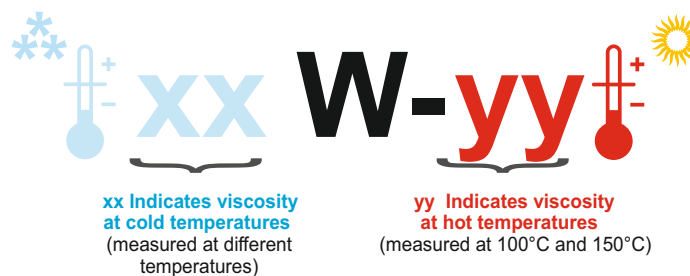

CERTIFICATE



Certificate of Registration

This is to certify that

PARAMOX INDUSTRIES PVT LTD

Factory Address:- 56 to 65 Sai Industrial Estate ORMA, OLPAD, Surat-394540, Gujarat, India.

Registered Address:- 26 E, Suryapur Society, Opp. Rushabh Tower, Surat -395009, Gujarat, India.

has been independently assessed by QRO
and is compliant with the requirement of:

ISO 9001:2015

Quality Management System

For the following scope of activities:

Manufacture and Distribution of Automotive & Industrial Lubricants and Specialities,
(Brand Name Castle Lubes Cristal lubes).

Date of Certification: 4th May 2023
1st Surveillance Audit Due: 3rd May 2024

2nd Surveillance Audit Due: 3rd May 2025
Certificate Expiry: 3rd May 2026

Certificate Number: Draft



Signature
Head of Certification

Validity of this certificate is subject to annual surveillance audits to be done successfully on or before 365 days from date of the audit.
(In case surveillance audit is not allowed to be conducted: this certificate shall be suspended / withdrawn).

The Validity of this certificate can be verified at www.qrocert.org

This certificate of registration remains the property of QRO Certification LLP, and shall be returned immediately upon request.

India Office : QRO Certification LLP
142, 11th Floor, Avtar Enclave, Near Paschim Vihar West Metro Station, Delhi-110063, (INDIA)
Website : www.qrocert.org, E-mail : info@qrocert.org

भारत सरकार Government of India सूक्ष्म, लघु एवं मध्यम उद्यम मंत्रालय Ministry of Micro, Small and Medium Enterprises		MSME सूक्ष्म, लघु एवं मध्यम उद्यम MICRO, SMALL & MEDIUM ENTERPRISES																					
UDYAM REGISTRATION CERTIFICATE																							
Our small hands to make you LARGE																							
TYPE OF ENTERPRISE	MICRO	MANUFACTURING																					
UDYAM REGISTRATION NUMBER	UDYAM-GJ-22-0020533																						
NAME OF ENTERPRISE	PARAMOX INDUSTRIES PRIVATE LIMITED																						
SOCIAL CATEGORY OF ENTREPRENEUR	General																						
NAME OF UNITS	<table border="1"> <thead> <tr> <th>S.No.</th> <th>Units Name</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>PARAMOX INDUSTRIES PRIVATE LIMITED</td> </tr> </tbody> </table>			S.No.	Units Name	1	PARAMOX INDUSTRIES PRIVATE LIMITED																
S.No.	Units Name																						
1	PARAMOX INDUSTRIES PRIVATE LIMITED																						
OFFICIAL ADDRESS OF ENTERPRISE	<table border="1"> <thead> <tr> <th>Flat/Door/Block No.</th> <th>E-26</th> <th>Name of Premises/ Building</th> <th>SURYAPUR SOCIETY</th> </tr> </thead> <tbody> <tr> <td>Village/Town</td> <td>SURAT</td> <td>Block</td> <td>ADAJAN PATIYA</td> </tr> <tr> <td>Road/Street/Lane</td> <td>ADAJAN</td> <td>City</td> <td>SURAT</td> </tr> <tr> <td>State</td> <td>GUJARAT</td> <td>District</td> <td>SURAT, Pin 395009</td> </tr> <tr> <td>Mobile</td> <td>9909010417</td> <td>Email:</td> <td>miteshpatelbjs@gmail.com</td> </tr> </tbody> </table>			Flat/Door/Block No.	E-26	Name of Premises/ Building	SURYAPUR SOCIETY	Village/Town	SURAT	Block	ADAJAN PATIYA	Road/Street/Lane	ADAJAN	City	SURAT	State	GUJARAT	District	SURAT, Pin 395009	Mobile	9909010417	Email:	miteshpatelbjs@gmail.com
Flat/Door/Block No.	E-26	Name of Premises/ Building	SURYAPUR SOCIETY																				
Village/Town	SURAT	Block	ADAJAN PATIYA																				
Road/Street/Lane	ADAJAN	City	SURAT																				
State	GUJARAT	District	SURAT, Pin 395009																				
Mobile	9909010417	Email:	miteshpatelbjs@gmail.com																				
DATE OF INCORPORATION / REGISTRATION OF ENTERPRISE	19/10/2020																						
DATE OF COMMENCEMENT OF PRODUCTION/BUSINESS																							
NATIONAL INDUSTRY CLASSIFICATION CODE(S)	<table border="1"> <thead> <tr> <th>S.No.</th> <th>NIC 2 Digit</th> <th>NIC 4 Digit</th> <th>NIC 5 Digit</th> <th>Activity</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>28 - Manufacture of machinery and equipment n.e.c.</td> <td>2822 - Manufacture of metal-forming machinery and machine tools</td> <td>28221 - Manufacture of machine tools for turning, drilling, milling, shaping, planning, boring, grinding etc.</td> <td>Manufacture</td> </tr> </tbody> </table>			S.No.	NIC 2 Digit	NIC 4 Digit	NIC 5 Digit	Activity	1	28 - Manufacture of machinery and equipment n.e.c.	2822 - Manufacture of metal-forming machinery and machine tools	28221 - Manufacture of machine tools for turning, drilling, milling, shaping, planning, boring, grinding etc.	Manufacture										
S.No.	NIC 2 Digit	NIC 4 Digit	NIC 5 Digit	Activity																			
1	28 - Manufacture of machinery and equipment n.e.c.	2822 - Manufacture of metal-forming machinery and machine tools	28221 - Manufacture of machine tools for turning, drilling, milling, shaping, planning, boring, grinding etc.	Manufacture																			
DATE OF UDYAM REGISTRATION	09/11/2020																						

Disclaimer: This is computer generated statement, no signature required.

Printed from <https://udgmreregistration.gov.in>

For any assistance, you may contact:

1. DIC SURAT
2. MSME-DI AHMEDABAD

Visit : www.msme.gov.in ; www.dcmsme.gov.in ; www.champions.gov.in

Follow us @minmsme & @msmechampions



BE A CHAMPION
with the
Ministry of
MSME

CERTIFICATE

CERTIFICATE

CERTIFICATE

Detail	
APPLICATION NUMBER	301313
CBR NUMBER	1205
CBR DATE	15/01/2018 15:16:36
NAME OF ARTICLE	BOTTLE
NAME OF APPLICANT	PATEL SEJALBEN
FILED AT	Delhi


Application Status	
Design Accepted and Published, Journal No 21/2018 and Journal Date 25/05/2018	

[Print](#)
[Back Report](#)

Application Number Search Format
Please enter a Six digit numeric number

Disclaimer: Application status is available for the application filed on or after 1st April 2009 with application no 222230. The information under " Design Application Status" is dynamically retrieved and is under testing, therefore the information retrieved by this system is not valid for any legal proceedings under the Design Act 2000. In case of any discrepancy you may contact the appropriate Patent Office or send your comments to following email IDs:
Design Office, Kolkata : controllerdesign.ipo@nic.in
Controller General of Patents, Designs and Trademarks

CERTIFICATE

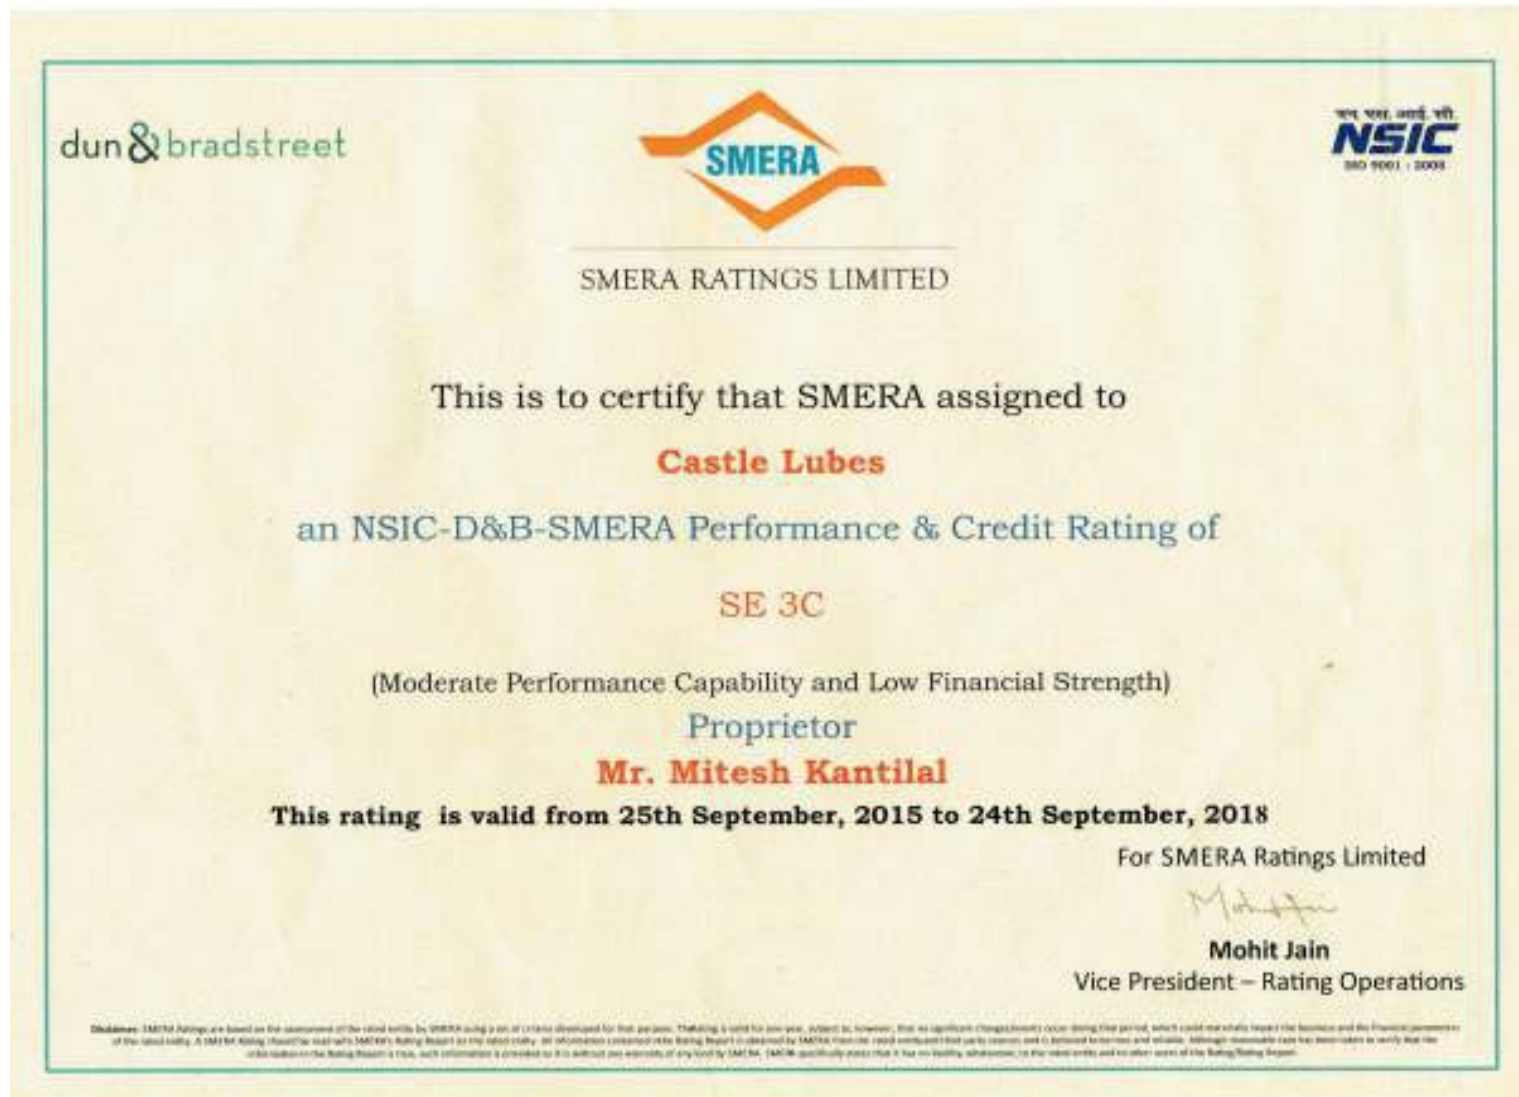

CERTIFICATE



CERTIFICATE

ANNOUNCEMENT TO CUSTOMER FOR REBRANDING

It is with great pleasure to announce that our company has reached to its new milestone being "[PARAMOX INDUSTRIES PVT LTD](#)", accordingly with great honour, we hereby announced that our PRODUCT / MARKETING material logo will be change from

<u>OLD</u>	<u>NEW</u>
<u>CRISTAL</u>	<u>PARAMOX</u>

We would like to assure our commitment towards quality and invite our valued customers to join hand to celebrate our new achievement as it would not possible without your support and trust.

We appreciate your continued trust, co-operation and support.



CERTIFICATE

CERTIFICATE

CERTIFICATE NO: DIPP100733	 Government of India Ministry of Commerce & Industry Department for Promotion of Industry and Internal Trade	#startupindia
CERTIFICATE OF RECOGNITION		
<i>This is to certify that PARAMOX INDUSTRIES PRIVATE LIMITED incorporated as a Private Limited Company on 19-10-2020, is recognized as a startup by the Department for Promotion of Industry and Internal Trade. The startup is working in 'Automotive' Industry and 'Others' sector as self-certified by them.</i>		
This certificate shall only be valid for the Entity up to Ten years from the date of its incorporation only if its turnover for any of the financial years has not extended ₹ 100 Cr.		
11-05-2022 DATE OF ISSUE	18-10-2030 VALID UPTO	

CERTIFICATE



MOTORCYCLE

100% MINERAL ENGINE OIL

PREMIUM 4T 20W40 - SN	13
ADVANCE 4T 20W40 - SM	14
4T PLUS 20W40 - SL	15
EXCELLENT 10W30 - SN	16
EXCELLENT MULTI 4T 20W50 - SN	17
CRUISE 4T 15W50 - SN	18

100% SYNTHETIC ENGINE OIL

ADVANCE PREMIUM 4T 20W40 - SN	19
EXCELLENT 10W30 - SN	20
POWER 4T 20W40 - SM	21
PLATINUM 4T 20W40 - SN	22
ULTRACLEAN 4T 20W50 - SM	23
SUPER 4T 15W50 - SN.....	24
CRUISE 4T 15W50 - SN.....	25



GASOLINE ENGINE OILS

100% MINERAL ENGINE OIL

ADVANTAGE POWER 5W30 - SN/CF	26
ADVANTAGE PLATINUM 5W40 - SN/CF	27
ADVANTAGE ULTRA 15W40 - CI-4+/SN	28
ADVANTAGE ULTRA PLUS 15W40 - CI-4/SN	29
ADVANTAGE PLUS 15W40 - CH-4/SJ	30
ADVANTAGE SUPER 20W50 - SL-CF	31

100% SYNTHETIC ENGINE OIL

ADVANTAGE POWER 5W30 - SP/SN PLUS	32
ADVANTAGE PLATINUM 5W40 - SP/SN PLUS	33
ADVANTAGE ULTRA 15W40 - CI-4+/SN PLUS	34



DIESEL ENGINE OIL

100% MINERAL ENGINE OIL

DYNAMIC EXCELLENT X 30 15W40 - CK-4/CJ-4 (SYNTHETIC)	35
DYNAMIC TURBO 15W40 - CF-4/SJ	36
DYNAMIC PLUS 15W40 - CH-4/SJ	37
DYNAMIC COBALT 15W40 - CI-4/SN	38
DYNAMIC ZIRCON 15W40 - CF-4/SJ	39



AGRICULTURE

AGRICULTURE SUPER 20W40 - CF	40
AGRICULTURE PUMPSET SAE 40	41
AGRICULTURE UTTO	42



TRANSMISSION OIL

TRANS GEAR XT EP- 90	43
TRANS GEAR GT EP- 140	44
TRANS ULTRA EP- 80W90	45
TRANS EXCELLENT EP- 85W140	46
TRANS POWER EP- 75W90	47



COOLANT

COOLCAR 1:3	48
COOLCAR 1:4	49



FORK OIL AND 2T OIL

FORK OIL	50
SUPREME 2T	51



HYDRAULIC OIL

QUICK HYDRO(HLP) 32/46/68	52
HYDRA XP (AWH) 32/46/68	53



BRAKE FLUID

BRAKE FLUID (DOT-3)	54
BRAKE FLUID (DOT-4)	55



GREASE

CALSOPLEX Ap3 RED GEL GREASE	56
MILITHON Mp3 GREASE	56
LITHON LITHIUM GREASE NIGL-2	57
LETHOPLEX LITHIUM GREASE NIGL-3	57



INDUSTRIAL OIL

AIR COMPRESSOR OIL	58
REFRIGERATION COMPRESSOR OIL	59
WATER SOLUBLE CUTTING OIL	60
NEAT CUTTING OIL	61



PREMIUM 4T



Paramox Premium 4T 20W40 API SN is a set of superior quality 4-stroke engine oils developed for the latest high performance 4-stroke bike engines. Blended using superior quality base oils and special additives these provide faster pick-up, sustained acceleration and improved wear protection thus ensuring consistent performance throughout oil life. Paramox Premium 4T 20W40 meets the performance requirements of API SN & JASO Ma2.

FEATURES & BENEFITS

- Oil performance reliability.
- 100% Mineral Technology lubricant with special oil formulation to keep oil viscosity in grade for longer.
- Enhanced wear protection actions against valve train wear.
- Enhanced cleanliness removal of sludge and engine deposits.

PARAMETERS	TEST METHOD	UNIT	PARAMOX PREMIUM 4T SAE 20W40 API SN JASO Ma2
Density @ 29°C	ASTM D1298	kg/l	0.890
Viscosity @ 100°C	ASTM D445	cSt	15.0
Viscosity @ 40°C	ASTM D445	cSt	122
Viscosity Index	ASTM D2270	–	126
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	242
Total Base Number (TBN)	ASTM D2896	mg KOH/g	9.4



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

20W40 API SN

MOTORCYCLE OIL



ADVANCE 4T

Paramox ADVANCE 4T 20W-40 API SM motorcycle oil is specially formulated for air-cooled engines of motorcycles. The special additive formulation in Paramox 4T Plus 20W-40 ensures protection to engine and gear components along with smooth clutch performance to provide trouble-free operation.

FEATURES & BENEFITS

- Cooler and cleaner engine
- Superior clutch performance
- Improved engine and gear protection

SPECIFICATION

- SAE 20W40
- API SM

PARAMETERS	TEST METHOD	UNIT	PARAMOX ADVANCE 4T SAE 20W40 API SM JASO Ma2
Density @ 29°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	15.0
Viscosity @ 40°C	ASTM D445	cSt	122
Viscosity Index	ASTM D2270	–	122
Pour Point	ASTM D97	°C	-33
Flash Point	ASTM D92	°C	235
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.7



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

20W40 API SM

MOTORCYCLE OIL



4T PLUS

Paramox 4T Plus 20W-40 API SN motorcycle oil is specially formulated for air-cooled engines of motorcycles. The special additive formulation in Paramox 4T Plus 20W-40 ensures protection to engine and gear components along with smooth clutch performance to provide trouble-free operation.

FEATURES & BENEFITS

- Cooler and cleaner engine
- Superior clutch performance
- Improved engine and gear protection

SPECIFICATION

- SAE 20W40
- API SL

PARAMETERS	TEST METHOD	UNIT	PARAMOX 4T PLUS SAE 20W40 API SL JASO Ma2
Density @ 29°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	15.0
Viscosity @ 40°C	ASTM D445	cSt	122
Viscosity Index	ASTM D2270	–	122
Pour Point	ASTM D97	°C	-33
Flash Point	ASTM D92	°C	240
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.7



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

20W40 API SL

MOTORCYCLE OIL



EXCELLENT 4T

Paramox Excellent 4T 10W-30 API SN engine oil is purposefully engineered to cater to the exacting needs of high-performance 4-stroke motorcycles. Its primary goal is to ensure optimal engine performance, longevity, superior protection and instant pickup under diverse riding conditions.

FEATURES & BENEFITS

- Resists viscosity and thermal breakdown at high temperatures.
- Protects against sludge and varnish formation.
- Protects against scuffing and wear.
- Protects against rust and bearing corrosion.
- Good resistance to foaming and air entrainment.
- Proper frictional properties to avoid clutch

SPECIFICATION

- SAE 10W30
- API SN
- JASO MB

PARAMETERS	TEST METHOD	UNIT	PARAMOX EXCELLENT 4T SAE 10W30 API SN JASO MB
Density @ 29°C	ASTM D1298	kg/l	0.890
Viscosity @ 100°C	ASTM D445	cSt	10.8
Viscosity @ 40°C	ASTM D445	cSt	70
Viscosity Index	ASTM D2270	–	122
Pour Point	ASTM D97	°C	-40
Flash Point	ASTM D92	°C	226
Total Base Number (TBN)	ASTM D2896	mg KOH/g	11



AVAILABLE PACKING

800 ml, 900 ml, 1L, 55L, 210L etc.

10W30 API SN

MOTORCYCLE OIL



EXCELLENT MULTI 4T



Paramox Excellent Multi 4T 20W50 API SN is a premium quality 4-stroke engine oil developed specifically to meet the requirements of the latest high-performance air cooled 4-stroke bike engines. This oil is blended from superior quality base oils and specially selected performance additives. Paramox Excellent Multi 4T 20W50 exceeds the performance requirements of JASO MA2 and Valve Train Wear requirements of API SN.

FEATURES & BENEFITS

- Resists viscosity and thermal breakdown at high temperatures.
- Protects against sludge and varnish formation.
- Protects against scuffing and wear.
- Protects against rust and bearing corrosion.
- Good resistance to foaming and air entrainment.
- Proper frictional properties to avoid clutch slippage.

SPECIFICATION

- SAE 20W50
- API SN
- JASO Ma2

PARAMETERS	TEST METHOD	UNIT	PARAMOX EXCELLENT MULTI 4T SAE 20W50 API SN JASO Ma2
Density @ 29°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	18.5
Viscosity @ 40°C	ASTM D445	cSt	160
Viscosity Index	ASTM D2270	–	126
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	230
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.5



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

20W50 API SN

MOTORCYCLE OIL



CRUISE 4T



Paramox Cruise 4T 15W50 API SN engine oil designed to give a reliable performance, it is specially formulated with uni advance formula which helps to maintain uniform viscosity over the entire life of the oil. This leads to the consistent performance of the engine even under different operating conditions.

FEATURES & BENEFITS

- Keep the engine clean and longer drain interval.
- Reduce valve train wear and durability.
- Increase engine life.
- Superior top-class engine performance for today's new generations higher all types of diesel and petrol engines.
- Special formula stays in grade longer.

SPECIFICATION

- SAE 15W50
- API SN
- JASO Ma2

PARAMETERS	TEST METHOD	UNIT	PARAMOX CRUISE 4T SAE 15W50 API SN JASO Ma2
Density @ 29°C	ASTM D1298	kg/l	0.856
Viscosity @ 100°C	ASTM D445	cSt	17.2
Viscosity @ 40°C	ASTM D445	cSt	120
Viscosity Index	ASTM D2270	–	157
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	215
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.5



AVAILABLE PACKING

2.5L, 55L, 210L etc.

15W50 API SN

MOTORCYCLE OIL



PREMIUM 4T

Fully Synthetic Engine Oil



Paramox Premium Synthetic(20W40 - API SN) Engine Lubricant provides high quality engine protection under all driving conditions and is specifically formulated to provide extra protection against the harmful effects of city driving, where cars undergo a higher stress due to constant stopping and going.

Paramox Synthetic Technology provides unsurpassed protection. Our advanced oil chemistry actually improves oil properties through time, retaining viscosity, friction and anti-wear benefits, in spite of severe engine temperatures.

FEATURES & BENEFITS

- Oil performance reliability.
- 100% Synthetic Technology lubricant with special oil formulation to keep oil viscosity in grade for longer.

PARAMETERS	TEST METHOD	UNIT	PARAMOX PREMIUM 4T SAE 20W40 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	18.75
Viscosity @ 40°C	ASTM D445	cSt	160.1
Viscosity Index	ASTM D2270	–	132
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	252
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.5



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

20W40

API SN

MOTORCYCLE OIL



EXCELLENT 4T

Fully Synthetic Engine Oil



Paramox Excellent 10W-30 API - SN is superior performance synthetic 4-stroke engine oil specially designed for modern scooter engines with automatic transmission and dry clutch. The scooter engines are compact and enclosed, they operate at higher temperatures and hence need specially designed oils as motorcycle oils may not provide adequate protection. It is blended with synthetic base stocks and advanced special additive technology to ensure smoother ride even in severe city stop & go driving conditions. The friction modifier used in this oil reduces engine friction leading to improved fuel economy. The product meets the requirements of the API SN and JASO Ma2 for 4-stroke engine oils.

FEATURES & BENEFITS

- Keep the engine clean and longer drain interval.
- Reduce valve train wear and improves durability.
- Increase engine life.
- Special formula stays in grade longer.

PARAMETERS	TEST METHOD	UNIT	PARAMOX EXCELLENT 4T SAE 10W30 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	10.69
Viscosity @ 40°C	ASTM D445	cSt	70.5
Viscosity Index	ASTM D2270	–	149
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	238
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.1



AVAILABLE PACKING

800 ml, 900 ml, 1L, 55L, 210L etc.

10W30 API SN

MOTORCYCLE OIL



POWER 4T

Fully Synthetic Engine Oil

Paramox POWER 4T 5W-30 API SN is fully synthetic BS-VI compliant low viscosity 4-stroke engine oil specifically developed for modern generation motorcycles to support fuel efficiency with less emission and without compromising the engine durability.

Paramox POWER 4T 5W-30 API SN is formulated with premium quality synthetic base oils having high viscosity index and specially selected additive system which ensure optimum engine performance under variety of riding conditions.

Paramox POWER 4T 5W-30 API SN exhibits effective lubrication as well as protection of engine, gear and transmission system of BS-VI, BS-IV & older generation motorcycles.

FEATURES & BENEFITS

- Excellent acceleration
- Smooth riding and
- Excellent protection
- Keeps engine cool
- Enduring performance

PARAMETERS	TEST METHOD	UNIT	PARAMOX POWER 4T SAE 5W30 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	10.62
Viscosity @ 40°C	ASTM D445	cSt	61.12
Viscosity Index	ASTM D2270	–	165
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	238
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.1



AVAILABLE PACKING

600 ml, 800 ml, 900 ml, 1L, 55L, 210L etc.

5W30

API SN

MOTORCYCLE OIL



PLATINUM 4T

Fully Synthetic Engine Oil

Paramox PLATINUM 4T 5W-40 API SN series are advanced full synthetic, 4-stroke motorcycle oil developed to meet the demanding requirements of 4-stroke gasoline engines in high performance motorcycles. It exceeds the most demanding lubrication requirements of modern 4-stroke motorcycles. It provides excellent protection to engine, gearbox and wet clutch over wide range of ambient temperatures and severe operating conditions to ensure high reliability. These oils meet the specifications of API SN, JASO MA 2 and the requirements of leading global 4-stroke motorcycle manufacturers.

FEATURES & BENEFITS

- Excellent acceleration
- Smooth riding and
- Excellent protection
- Keeps engine cool
- Enduring performance

PARAMETERS	TEST METHOD	UNIT	PARAMOX PLATINUM 4T SAE 5W40 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	10.62
Viscosity @ 40°C	ASTM D445	cSt	61.12
Viscosity Index	ASTM D2270	–	165
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	238
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.5



AVAILABLE PACKING

600 ml, 800 ml, 900 ml, 1L, 55L, 210L etc.

5W40

API SN

MOTORCYCLE OIL



ULTRACLEAN 4T

Fully Synthetic Engine Oil

Paramox ULTRACLEAN 4T 10W-40 API SN series are advanced full synthetic, 4-stroke motorcycle oil developed to meet the demanding requirements of 4-stroke gasoline engines in high performance motorcycles. It exceeds the most demanding lubrication requirements of modern 4-stroke motorcycles. It provides excellent protection to engine, gearbox and wet clutch over wide range of ambient temperatures and severe operating conditions to ensure high reliability. These oils meet the specifications of API SN, JASO MA2 and the requirements of leading global 4-stroke motorcycle manufacturers.

FEATURES & BENEFITS

- Excellent acceleration
- Excellent protection
- Enduring performance
- Smooth riding and
- Keeps engine cool

PARAMETERS	TEST METHOD	UNIT	PARAMOX ULTRACLEAN 4T SAE 10W40 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.53
Viscosity @ 40°C	ASTM D445	cSt	91.10
Viscosity Index	ASTM D2270	–	166
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	234
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8



AVAILABLE PACKING

900 ml, 1L, 55L, 210L etc.

10W40 API SN

MOTORCYCLE OIL



SUPER 4T

Fully Synthetic Engine Oil

PARAMOX SUPER 4T 20W-50 API SN combines high performance Fully synthetic technology with a precisely balanced component system to help provide excellent engine cleanliness, wear protection at high temperatures and protection from corrosion. Regular use of **PARAMOX SUPER 4T 20W-50 API SN** helps maintain optimized power output due to the inherently strong performance and protection provided by the synthetic technology. This specially engineered motorcycle engine oil helps to deliver optimized performance under some of the most severe operating conditions.

FEATURES & BENEFITS

- Excellent acceleration
- Excellent protection
- Enduring performance
- Smooth riding and
- Keeps engine cool

PARAMETERS	TEST METHOD	UNIT	PARAMOX SUPER 4T SAE 20W50 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	18.74
Viscosity @ 40°C	ASTM D445	cSt	160.1
Viscosity Index	ASTM D2270	–	132
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	250
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.1



AVAILABLE PACKING

1L, 1.2 L, 55L, 210L etc.

20W50 API SN

MOTORCYCLE OIL



CRUISE 4T

Fully Synthetic Engine Oil

Paramox Cruise 4T SAE 15W-50 API SN are fully synthetic, 4-stroke gasoline engine oils developed specifically to meet the special requirements of latest high performance air cooled 4-stroke racing bikes with wet clutch system. These are blended with advanced additive technology and synthetic base stock (PAO and ester) to exceed the most demanding lubrication requirements of modern 4-stroke motorcycles. These provides excellent protection to engine, gearbox and wet clutch used in 4-stroke motorcycles and ensures highest degree of reliability even under severe operating conditions. These oils are available in SAE 15W-50 viscosity grades and meets the specifications of API SN and JASO Ma2.

FEATURES & BENEFITS

- Excellent acceleration
- Smooth riding and
- Excellent protection
- Keeps engine cool
- Enduring performance

PARAMETERS	TEST METHOD	UNIT	PARAMOX CRUISE 4T SAE 15W50 API SN JASO Ma2
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	19.2
Viscosity @ 40°C	ASTM D445	cSt	147.8
Viscosity Index	ASTM D2270	–	145
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	240
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.0



AVAILABLE PACKING

1L, 2.5 L, 55L, 210L etc.

15W50 API SN

MOTORCYCLE OIL



ADVANTAGE POWER



Paramox Advantage Power SAE 5W-30 API SN/CF is a car engine oil designed for high temperature protection, minimising deposits & sludge build - up. its special anti-wear technology provides improved wear protection of cam and other components thereby resulting into reduced maintenance cost.

Paramox Advantage Power 5W-30 is an advance semi Synthetic engine oil suitable for use in automotive petrol cng and diessel engines where the manufacturer recommends ACEA A3/B4 or API SN.

FEATURES & BENEFITS

- Maximises short and long term engine performance
- Delivers unsurpassed levels of protection across a variety of driving condition and temperatures.
- recommended by world-leading car manufacturers.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE POWER SAE 5W30 API SN / CF
Density @ 15°C	ASTM D1298	kg/l	0.856
Viscosity @ 100°C	ASTM D445	cSt	10
Viscosity @ 40°C	ASTM D445	cSt	52
Viscosity Index	ASTM D2270	–	156
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	230
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10



AVAILABLE PACKING

1L, 3L, 3.5L, 4.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

5W30

API SN/CF

PASSENGER CAR OIL



ADVANTAGE PLATINUM



Paramox Advantage Platinum SAE 5W40 API SN/CF is an advance synthetic passenger car motor oil, formulated from the same endurance tested technology that has powered numerous winning cars, which perform in the toughest endurance races across the globe. It provides exceptional protection under high demanding conditions that helps the car maintain its peak performance over extended periods of time.

It Carries approvals from loading is recommended for all modern passenger cars, specially those having High Performance turbo-charged petrol and diesel engines.

FEATURES & BENEFITS

- Clings to engine parts when the oil drains down
- Forms an extra layer that protects your engine during start up and beyond
- Bonds to metal surfaces to make engine parts more resistant to wear
- Provides increased protection in high and low temperature applications
- Provides continuous protection for all driving conditions, styles and temperatures.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE PLATINUM SAE 5W40 API SN/CF
Density @ 15°C	ASTM D1298	kg/l	0.856
Viscosity @ 100°C	ASTM D445	cSt	14.2
Viscosity @ 40°C	ASTM D445	cSt	75
Viscosity Index	ASTM D2270	–	162
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.2



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

5W40 API SN/CF

PASSENGER CAR OIL



ADVANTAGE ULTRA



Paramox Advantage Ultra SAE 15W40 API CI-4+/SN is recommended for use in diesel and petrol engines (naturally aspirated as well as turbo charged) of SUVs, MUVs and passenger cars, It has been formulated to withstand high operating temperatures and control deposit formation on engine parts and provide.

It Carries approvals from loading like is recommended for all modern passenger cars, specially those having High Performance turbo-charged petrol and diesel engines.

FEATURES & BENEFITS

- Clings to engine parts when the oil drains down
- Forms an extra layer that protects your engine during start up and beyond
- Bonds to metal surfaces to make engine parts more resistant to wear
- Provides increased protection in high and low temperature applications
- Provides continuous protection for all driving conditions, styles and temperatures.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE ULTRA SAE 15W40 API CI4+/SN
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.7
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	145
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10.2



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CI-4+/SN

PASSENGER CAR OIL



ADVANTAGE ULTRA PLUS



Paramox Advantage Ultra Plus SAE 15W40 API CI-4/SN is recommended for use in diesel and petrol engines (naturally aspirated as well as turbo charged) of SUVs, MUVs and passenger cars, It has been formulated to withstand high operating temperatures and control deposit formation on engine parts and provide.

It Carries approvals from loading like is recommended for all modern passenger cars, specially those having High Performance turbo-charged petrol and diesel engines.

FEATURES & BENEFITS

- Clings to engine parts when the oil drains down
- Forms an extra layer that protects your engine during start up and beyond
- Bonds to metal surfaces to make engine parts more resistant to wear
- Provides increased protection in high and low temperature applications
- Provides continuous protection for all driving conditions, styles and temperatures.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE ULTRA SAE 15W40 API CI4/SN
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.7
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	145
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10.2



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CI-4/SN

PASSENGER CAR OIL



ADVANTAGE PLUS



Paramox ADVANTAGE PLUS SAE 15W40 API CH-4/SJ is a high performance passenger car motor oil designed to provide optimum performance in high-output, multi valve, turbocharged & supercharged gasoline and diesel engines of passenger cars, vans, SUVs and light trucks. Its specially chosen additive technology enables reliable performance across different operating conditions while meeting the requirements of leading passenger car manufacturers and global industry standards.

FEATURES & BENEFITS

- Superior cleaning of engine sludge caused by poor fuel quality, heat and frequent short trips
- Advanced protection against viscosity and thermal breakdown
- Premium quality base oils and anti wear additives to help extend the life of your engine
- Helps minimise oil consumption.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE PLUS SAE 15W40 API CH-4/SJ
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.74
Viscosity @ 40°C	ASTM D445	cSt	109.9
Viscosity Index	ASTM D2270	–	138
Pour Point	ASTM D97	°C	-27
Flash Point	ASTM D92	°C	238
Total Base Number (TBN)	ASTM D2896	mg KOH/g	9.5



AVAILABLE PACKING

1L, 3L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40 API CH-4/SJ

PASSENGER CAR OIL



ADVANTAGE SUPER



Paramox Advantage Super SAE 20W-50 API SN/CF is superior technology engine oil designed for high Temperature protection, minimizing deposits & sludge build up and reducing oil consumption. Its special anti-wear technology provides improved wear protection of cam and other components thereby resulting into reduced maintenance cost.

Petrol, CNG or Diesel-powered cars.

Follow the equipment manufacturer's recommendation for performance level & viscosity grade.

FEATURES & BENEFITS

- Superior cleaning of engine sludge caused by poor fuel quality, heat and frequent short trips
- Advanced protection against viscosity and thermal breakdown
- Premium quality base oils and anti wear additives to help extend the life of your engine
- Helps minimise oil consumption.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE SUPER SAE 20W50 API SL/CF
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	19.95
Viscosity @ 40°C	ASTM D445	cSt	167.12
Viscosity Index	ASTM D2270	–	138
Pour Point	ASTM D97	°C	-27
Flash Point	ASTM D92	°C	246
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8



AVAILABLE PACKING

1L, 3L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

20W50

API SN/CF

PASSENGER CAR OIL



ADVANTAGE POWER

Fully Synthetic Engine Oil



Paramox Advantage Power SAE 5W30 API SP/SN PLUS is a fully synthetic engine oil for gasoline and diesel passenger's cars engines, particularly suitable for turbo compressed, multi-valve and direct injection diesel engines. Paramox Advantage Power can be used in the most difficult operating conditions (motorways, dense urban traffic...), and is appropriated for all driving types. It is perfectly suited to engines with catalytic converters and all engines using lead free fuel or LPG. Its fluidity reduces friction and therefore creates significant fuel savings and reduces CO2 emissions. Especially adapted to long oil change intervals.

FEATURES & BENEFITS

- Maximises short and long term engine performance
- Delivers unsurpassed levels of protection across a variety of driving condition and temperatures.
- recommended by world-leading car manufacturers.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE POWER SAE 5W30 API SP / SN PLUS
Density @ 15°C	ASTM D1298	kg/l	0.856
Viscosity @ 100°C	ASTM D445	cSt	10
Viscosity @ 40°C	ASTM D445	cSt	52
Viscosity Index	ASTM D2270	–	156
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	230
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10



AVAILABLE PACKING

1L, 3L, 3.5L, 4.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

5W30

API SP

SN PLUS

PASSENGER CAR OIL



ADVANTAGE PLATINUM

Fully Synthetic Engine Oil



Paramox Platinum SAE 5W40 API SP/SN PLUS is a fully synthetic engine oil for gasoline and diesel passenger's cars engines, particularly suitable for turbo compressed, multi-valve and direct injection diesel engines. Oscar Jade Gold can be used in the most difficult operating conditions (motorways, dense urban traffic...), and is appropriated for all driving types. It is perfectly suited to engines with catalytic converters and all engines using lead free fuel or LPG. Its fluidity reduces friction and therefore creates significant fuel savings and reduces CO2 emissions. Especially adapted to long oil change intervals.

FEATURES & BENEFITS

- Clings to engine parts when the oil drains down
- Forms an extra layer that protects your engine during start up and beyond
- Bonds to metal surfaces to make engine parts more resistant to wear
- Provides increased protection in high and low temperature applications
- Provides continuous protection for all driving conditions, styles and temperatures.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE PLATINUM SAE 5W40 API SP/SN PLUS
Density @ 15°C	ASTM D1298	kg/l	0.856
Viscosity @ 100°C	ASTM D445	cSt	14.2
Viscosity @ 40°C	ASTM D445	cSt	75
Viscosity Index	ASTM D2270	–	162
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.2



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

5W40

API SP SN PLUS

PASSENGER CAR OIL



ADVANTAGE ULTRA

Fully Synthetic Engine Oil



Paramox Advantage Ultra SAE 15W40 API CI-4+/SN PLUS is a fully synthetic engine oil for gasoline and diesel passenger's cars engines, particularly suitable for turbo compressed, multi-valve and direct injection diesel engines. Oscar Jade Gold can be used in the most difficult operating conditions (motorways, dense urban traffic...), and is appropriated for all driving types. It is perfectly suited to engines with catalytic converters and all engines using lead free fuel or LPG. Its fluidity reduces friction and therefore creates significant fuel savings and reduces CO2 emissions. Especially adapted to long oil change intervals.

FEATURES & BENEFITS

- Clings to engine parts when the oil drains down
- Forms an extra layer that protects your engine during start up and beyond
- Bonds to metal surfaces to make engine parts more resistant to wear
- Provides increased protection in high and low temperature applications
- Provides continuous protection for all driving conditions, styles and temperatures.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	ADVANTAGE ULTRA SAE 15W40 API CI4+/SN PLUS
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.7
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	145
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10.2



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CI-4+

SN PLUS

PASSENGER CAR OIL



DYNAMIC EXCELLENT X 30

Fully Synthetic Engine Oil



Paramox Dynamic Excellent X30 15W40 CK-4/CJ-4 is premium performance heavy-duty diesel engine oil specially developed for use in ultra-low emission engines meeting the latest US and European emission standards. This oil addresses the unique needs of the latest engines and enhances the life of exhaust after-treatment devices. It is formulated with state-of-the-art additive technology and severely hydro-processed base oils to provide excellent performance and overall protection having a potential to offer extended drain intervals.

It meets the performance requirements of API CK-4 service category. It is also backward compatible for the use in older engines requiring API CJ-4 and below quality oils.

FEATURES & BENEFITS

- superior thermo-oxidative stability
- higher level of protection against soot-related viscosity increase and viscosity loss
- Excels under high pressure

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	DYNAMIC EXCELLENT X30 SAE 15W40 API CK-4/CJ-4
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	15.2
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	145
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	220
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10.2



DIESEL CAR OIL

AVAILABLE PACKING

1L, 3L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CK-4 / CJ-4



DYNAMIC TURBO



Paramox Dynamic Turbo 15W-40 API CF-4/SJ Is multigrade diesel engine oil for light and medium duty cargo and passenger vehicles that are subjected to frequent start-stop traffic conditions. Formulated with proven additive technology and high quality base oil to protect critical engine parts, it keeps the engine cool and lowers maintenance cost.

RECOMMENDED FOR PARAMOX OIL FOR USE IN MINI CARGO AND PASSENGER TRUCKS ETC.

Please refer to service manual for drain interval & oil specification for specific vehicle types.

FEATURES & BENEFITS

- Effective anti-wear properties protect critical engine parts
- Proven additive technology controls sludge build-up and deposits and keeps engine clean

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	DYNAMIC TURBO SAE 15W40 API CF-4/SJ
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.9
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	136
Pour Point	ASTM D97	°C	-36
Flash Point	ASTM D92	°C	252
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10



DIESEL CAR OIL

AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CF-4/SJ



DYNAMIC PLUS

Paramox Dynamic PLUS 15W-40 API CH-4/SJ Is designed with 3X Protection Technology against overheating for mini truck engines which are subjected to frequent acceleration & carry vary loads.

Please refer to service manual for drain interval & oil specification for specific vehicle types.

FEATURES & BENEFITS

- Excellent thermo-oxidative stability controls deposits & viscosity increase facilitating longer drain intervals
- Advanced detergency reduces deposits and enhances engine cleanliness
- Better soot handling capability leads to control of soot induced oil thickening and wear

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	DYNAMIC PLUS SAE 15W40 API CH-4/SJ
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	14.9
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	129
Pour Point	ASTM D97	°C	-29
Flash Point	ASTM D92	°C	225
Total Base Number (TBN)	ASTM D2896	mg KOH/g	9.33



DIESEL CAR OIL

AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

15W40

API CH-4/SJ



DYNAMIC COBALT



Paramox Dynamic Cobalt SAE 20W-40 API CI-4 stands out as a heavy-duty multigrade diesel engine oil, meticulously crafted with a blend of mineral base oil and balanced array of additives. Its formulation is engineered to deliver superior detergency, dispersancy and anti-oxidation properties, effectively combating oil degradation, thickening and corrosion. Notably, this oil maintains exceptional shear stability, retaining its viscosity even under demanding high shear, high temperature conditions.

Ideal for heavy-duty, light duty commercial vehicles and multi-utility vehicles equipped with high-speed naturally aspirated or turbocharged diesel engines.

Please refer to service manual for drain interval & oil specification for specific vehicle types.

FEATURES & BENEFITS

- Exceptional wear protection: Provides unparalleled safeguarding against wear and tear.
- Superior high temperature oxidation stability: Offers advanced protection for the engine oil, particularly under high-temperature conditions.
- Advanced additive system: Enhances engine cleanliness and ensures consistent, high-level performance.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	DYNAMIC COBALT SAE 20W40 API CI-4/SN
Density @ 15°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	15.2
Viscosity @ 40°C	ASTM D445	cSt	116
Viscosity Index	ASTM D2270	–	129
Pour Point	ASTM D97	°C	-29
Flash Point	ASTM D92	°C	225
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.5



DIESEL CAR OIL

AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

20W40
API CI-4/SN



DYNAMIC ZIRCON



Paramox Dynamic zircon 20W-40 CF-4 is a multi-purpose. Heavy Duty Diesel engine oil. It is suitable for use in Tractors and agriculture equipment but many also be used In trucks or other off-road applications where API CF-4 is required. During its working lite. Your Engine factors challenges from deposits, and thicken the oil.

Paramox Dynamic Zircon 20W40 CF-4 Helps provide protection across multiple applications to encourage long and healthy engine oil

Please refer to service manual for drain interval & oil specification for specific vehicle types.

FEATURES & BENEFITS

- Exceptional wear protection: Provides unparalleled safeguarding against wear and tear.
- Superior high temperature oxidation stability: Offers advanced protection for the engine oil, particularly under high-temperature conditions.
- Advanced additive system: Enhances engine cleanliness and ensures consistent, high-level performance.
- Excellent shear stability: Maintains viscosity control, even amidst high temperatures and shear conditions.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	DYNAMIC ZIRCON SAE 20W40 API CF-4/SJ
Density @ 15°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	14.9
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	120
Pour Point	ASTM D97	°C	-29
Flash Point	ASTM D92	°C	218
Total Base Number (TBN)	ASTM D2896	mg KOH/g	8.0



DIESEL CAR OIL

AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

20W40
API CF-4/SJ



AGRICULTURE SUPER



Paramox Agriculture super 20W-40 a high performance diesel engine oil with advanced additive technology that offers superior performance even in severe operating conditions. thus ensuring better protection and cleaner engine for extended drain interval of up to 1000 hours.

RECOMMENDED FROM PARAMOX for tractors and other agricultural equipment where such type of lubricant is recommended.

Please refer to service manual for drain interval & oil specification for specific vehicle types.

FEATURES & BENEFITS

- Provides maximum engine power up to 1000 hours
- Improved thermo-oxidative stability controls sludge build-up and deposits
- Better detergency reduces deposits and keep the engines cleaner
- Good dispersancy helps in controlling soot induced oil thickening and wear
- Stay in grade shear stability helps reduce oil consumption and wear
- Good corrosion inhibition properties provide protection against corrosion and wear.

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	AGRICULTURE SUPER SAE 20W40 API CF-4
Density @ 15°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	14.9
Viscosity @ 40°C	ASTM D445	cSt	113
Viscosity Index	ASTM D2270	–	120
Pour Point	ASTM D97	°C	-29
Flash Point	ASTM D92	°C	218
Total Base Number (TBN)	ASTM D2896	mg KOH/g	7.5



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

20W40

API CF

AGRICULTURE OIL



AGRICULTURE PUMPSET



Paramox Standard Pumpset Oil SAE 40 is formulated from high grade petroleum mineral oil & its make with a team of trained professionals, We are a well-known name as Manufacturer and Supplier of excellent quality Pumpset Oil with thermal stability. With precise composition, Paramox Pumpset Oil is available in high-grade packaging. You can purchase quality-assured Pumpset Oil from us at competitive prices. Our clients trust us for delivering all orders on time. **Paramox Pumpset is recommended for all types of agricultural and farm equipment like Pumpsets, Tractors & DG sets requiring good quality Diesel Engine Oils.**

FEATURES & BENEFITS

- Protects engine from wear and rust
- Higher levels of engine cleanliness
- Longer oil life and equipment life
- Offers better fuel efficiency

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	AGRICULTURE PUMPSET SAE 40 API CF
Density @ 15°C	ASTM D1298	kg/l	0.880
Viscosity @ 100°C	ASTM D445	cSt	15.9
Viscosity @ 40°C	ASTM D445	cSt	109
Viscosity Index	ASTM D2270	–	118
Pour Point	ASTM D97	°C	-25
Flash Point	ASTM D92	°C	205
Total Base Number (TBN)	ASTM D2896	mg KOH/g	6.0



AVAILABLE PACKING

1L, 3L, 3.5L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

SAE 40 API CF

AGRICULTURE OIL



AGRICULTURE UTTO



Paramox Agriculture UTTO is a universal tractor transmission oil specially formulated with superior base oil and robust additive technology. It offers reliable clutch performance, noise-free brake operation, enhanced wear protection & load carrying capability thus reducing maintenance cost.

Recommended for agricultural tractors, off-highway and mining equipment with common sump for hydraulics, power steering, differential and oil immersed brakes.

FEATURES & BENEFITS

- Offers reliable clutch performance
- Ensures noise free brake operation
- Enhanced wear protection for hydraulics, brakes, gears
- Enhance load carrying capability thus reducing maintenance cost

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	UNIVERSAL TRACTOR TRANSMISSION OIL
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	10.07
Viscosity @ 40°C	ASTM D445	cSt	59.6
Viscosity Index	ASTM D2270	–	156
Pour Point	ASTM D97	°C	-42
Flash Point	ASTM D92	°C	248
Total Base Number (TBN)	ASTM D2896	mg KOH/g	10.6



AVAILABLE PACKING

1L, 3L, 5L, 7.5L, 10L, 15L, 20L, 55L, 210L etc.

UNIVERSAL TRACTOR TRANSMISSION OIL

AGRICULTURE OIL



ATF TQ DX III

Paramox ATF DX III is a high-performance fluid for power steering units of heavy-duty trucks and buses, light duty vehicles, off-highway construction and mining equipment. It offers improved wear protection, and its high viscosity index ensures adequate lubrication at low as well as high operating temperatures thus ensuring smooth power transmission.

Recommended for Power steering applications of various where fluid meeting General Motors DEXRON-III G or below quality fluids are needed.

FEATURES & BENEFITS

- Controlled frictional properties provide smooth transmission and good shift performance
- Better foam control leads to smooth & lasting shift feel and reduces fluid loss
- Provides improved protection against rust and corrosion
- Superior Low temperature pumpability and circulation ensures good cold start performance
- Compatibility with all common seal materials reduces possibility of oil leakage

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	AUTOMATIC TRANSMISSION FLUID (ATF-TQ DEX III)
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	6.7
Viscosity @ 40°C	ASTM D445	cSt	30
Viscosity Index	ASTM D2270	–	185
Pour Point	ASTM D97	°C	-50
Flash Point	ASTM D92	°C	220



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

ATF TQ DEX III

AUTOMATIC TRANSMISSION



TRANS GEAR XT

Paramox Gear XT EP-90 is a high performance gear lubricant designed to provide effective lubrication in a wide range of automotive transmissions and axle drives where API GL-4 quality oil is specified. It is formulated from high quality base stocks and balanced extreme pressure additives to provide.

FEATURES & BENEFITS

- Excellent thermal & chemical stability
- Protection against rust and corrosion ensuring longer trouble free protection

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	TRANS 90 GEAR OIL EP-90 GL-4
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	19.5
Viscosity @ 40°C	ASTM D445	cSt	221
Viscosity Index	ASTM D2270	–	100
Pour Point	ASTM D97	°C	-21
Flash Point	ASTM D92	°C	236



AVAILABLE PACKING

1L, 5L, 55L, 210L etc.

GEAR OIL

EP-90



TRANS GEAR GT

Paramox Trans GT 140 is transmission oil for use in a wide range of automotive axles. Its advanced formula protects gear surfaces from wear and specialized molecules consistent lubrication thus resulting in enhanced durability and a smooth driving experience.

FEATURES & BENEFITS

- Superior Protection to Gears under heavy loads
- Good Thermal Stability and Seal Compatibility
- Superior Protection against Rust and Corrosion

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	TRANS 140 GEAR OIL EP-140 GL-4
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	17.50
Viscosity @ 40°C	ASTM D445	cSt	150
Viscosity Index	ASTM D2270	–	96
Pour Point	ASTM D97	°C	-24
Flash Point	ASTM D92	°C	225



AVAILABLE PACKING

1L, 5L, 55L, 210L etc.

GEAR OIL

EP-140



TRANS ULTRA

Paramox Trans Ultra 80W-90 is an extreme pressure gearbox oil for use in a wide range of automotive manual transmissions. Its advanced formula protects gear surfaces from wear at start up, easy shifting at low temperature and specialized molecules ensures consistent lubrication throughout the drive cycle resulting in 'Smooth Driving Experience'. Paramox Trans Ultra 80W-90 offer 1,20,000 km* drain intervals in automotive applications requiring API GL-5 type of oils.

FEATURES & BENEFITS

- Excellent frictional properties
- Excellent rust, staining, and corrosion protection
- Compatible with typical automotive seals and gaskets
- Good thermal stability and resistance to high temperature oxidation

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	TRANS ULTRA GEAR OIL EP-80W90 GL-5
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	16.85
Viscosity @ 40°C	ASTM D445	cSt	145
Viscosity Index	ASTM D2270	–	96
Pour Point	ASTM D97	°C	-30
Flash Point	ASTM D92	°C	235



AVAILABLE PACKING

1L, 5L, 55L, 210L etc.

EP-80W90

GEAR OIL



TRANS EXCELLENT

Paramox Trans Excellent 85W-140 is transmission oil for use in a wide range of automotive axles. Its advanced formula protects gear surfaces from wear and specialized molecules ensure consistent lubrication thus resulting in enhanced durability and 'Smooth Driving Experience'. Paramox Trans Excellent 85W-140 offers 1,20,000 km* drain intervals in automotive applications requiring API GL-5, SAE J 2360 type of oils.

FEATURES & BENEFITS

- Excellent frictional properties
- Excellent rust, staining, and corrosion protection
- Compatible with typical automotive seals and gaskets
- Good thermal stability and resistance to high temperature oxidation

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	TRANS EXCELLENT GEAR OIL EP-85W140 GL-5
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	27.8
Viscosity @ 40°C	ASTM D445	cSt	369
Viscosity Index	ASTM D2270	–	100
Pour Point	ASTM D97	°C	-18
Flash Point	ASTM D92	°C	210



AVAILABLE PACKING

1L, 5L, 55L, 210L etc.

GEAR OIL

EP-85W140



TRANS POWER

Paramox Trans Power SAE 75W-90 API GL-5 Advanced Full Synthetic Gear Oil is a superior sulfur-phosphorus extreme pressure gear lubricant formulated with synthetic base stocks and additives to provide excellent performance. It is designed to provide excellent extreme pressure protection, load carrying capacity, anti-foam performance, corrosion protection, and thermal stability protection. It is recommended for conventional and high-performance applications.

FEATURES & BENEFITS

- Exceptional thermal stability
- Enhanced frictional properties
- Resistance to high temperature oxidation
- Outstanding protection against low speed/high torque wear

*When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	TRANS POWER GEAR OIL EP-75W90 GL-5
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	15.7
Viscosity @ 40°C	ASTM D445	cSt	115
Viscosity Index	ASTM D2270	–	144
Pour Point	ASTM D97	°C	-45
Flash Point	ASTM D92	°C	210



AVAILABLE PACKING

1L, 5L, 55L, 210L etc.

EP-75W90

GEAR OIL



COOLANT FLUID



Paramox CoolCar Guard is an environment friendly coolant. It's **Sustained Release Technology** resists corrosion thus extending life of cooling system components. It is recommended to dilute 1 part of Paramox Coolcar Guard in 3 parts of demineralized(DM) Water.

Recommended for use in radiators of trucks, buses, LCVs, tractors, earth moving and construction equipment operating in moderate climatic conditions.

FEATURES & BENEFITS

- Ready for use
- Efficient protection down to -36°C during winter condition
- Does not foam or clog radiators

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	COOLANT FLUID 1:3	COOLANT FLUID 1:4
Density @ 15°C	ASTM D1298	kg/l	0.870	0.870
Boiling point	ASTM D1120	°C	2.2	2.2
Freezing point	ASTM D1177	°C	9.0	9.0



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

COOLCAR GUARD

FLUID



FORK OIL

Paramox Fork Oil is specially made for use in hydraulic front forks of Bike and other shock absorbing and dampening mechanisms for highly stable suspension. Recommended for use in motorcycle forks and shocks for road, Off-road and to minimise the effect of foam or air entrainment in the fork.

FEATURES & BENEFITS

- Increase the life of shock absorber
- Excellent seal compatibility
- Longer Oil life
- Excellent damping effect

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	FORK OIL
Viscosity @ 100°C	ASTM D445	cSt	5.0
Viscosity @ 40°C	ASTM D445	cSt	24.3
Viscosity Index	ASTM D2270	—	138
Pour Point	ASTM D97	°C	-39
Flash Point	ASTM D92	°C	201



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

FORK OIL

FORK OIL



SUPREME 2T

Paramox Supreme 2T JASO FC is a premium quality semi-synthetic lubricant specially developed for high powered 2-stroke air cooled gasoline engines fitted with oil-injection or premix systems. It is formulated from premium quality base stocks, synthetic base fluid and unique performance additives for exceptional engine protection, cleanliness and low smoke in 2-stroke motorcycle/ scooter engines even under severe operating conditions. The product exceeds the latest international specifications of JASO FC and the requirements of leading global 2-stroke motorcycle/scooter manufacturers.

FEATURES & BENEFITS

- Outstanding lubricity protects against piston scuffing and premature wear of engine components
- Advanced formulation provides excellent control against engine deposits, exhaust system blocking and extended
- engine life without power loss
- Low ash additive technology prevents pre-ignition and spark plug fouling
- Specially selected synthetic base fluid reduces visible exhaust smoke

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	SUPREME 2T JASO FC
Density @ 15°C	ASTM D1298	kg/l	0.876
Viscosity @ 100°C	ASTM D445	cSt	8.1
Viscosity @ 40°C	ASTM D445	cSt	47.9
Viscosity Index	ASTM D2270	–	142
Pour Point	ASTM D97	°C	-44
Flash Point	ASTM D92	°C	171
Total Base Number (TBN)	ASTM D2896	mg KOH/g	3.8



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

JASO FC

SUPREME 2T



QUICK HYDRO (HLP)



Paramox QUICK HYDRO HLP is high detergent HLP/EP general lubricating and hydraulic oil with excellent corrosion protection. Paramox QUICK HYDRO HLP series are hydraulic fluids and with outstanding corrosion protection, powerful cleaning and sludge transportation properties. Contain zinc as well as being detergent and dispersant. Used in a number of hydraulic systems as problem solvers, especially when standard oils cannot fulfil all the requirements.

FEATURES & BENEFITS

- Excellent thermo-oxidative stability controls the formation of sludge & varnish and improves oil life
- Exceptional anti-wear property results in longer pump and component life and reduces costs
- Superior demulsibility helps in faster separation of water from oil and resists formation of emulsions

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

Properties	32	46	68	100	150	220
Viscosity @ 40°C, Cst	32	46	68	102	152	222
Viscosity @ 100°C, Cst	5.35	6.65	8.65	10.9	14.7	18.9
Viscosity Index	102	101	98	95	95	95
Pour Point, °C	-27	-24	-21	-18	-18	-12
Flash Point, °C	210	226	236	240	250	260
Air release @ 50°C	2.9	3.8	6.2	-	-	-



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

HLP

HYDRAULIC HLP



HYDRA XP (AWH)

Paramox Hydra XP AWH has been specially formulated to provide good anti-wear and thermal stability performance. The careful blend of additives with a high quality base stock ensures that Hydra XP AWH has excellent hydrolytic and oxidative stability hile exhibiting a minimal tendency to produce sludge and deposits. In addition, Hydra XP AWH provides corrosion protection to ferrous and yellow metal components found within a hydraulic system.

FEATURES & BENEFITS

- Excellent thermo-oxidative stability controls the formation of sludge & varnish and improves oil life
- Exceptional anti-wear property results in longer pump and component life and reduces costs
- Superior demulsibility helps in faster separation of water from oil and resists formation of emulsions

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

Properties	32	46	68	100	150	220
Viscosity @ 40°C, Cst	32	46	68	102	152	222
Viscosity @ 100°C, Cst	5.35	6.65	8.65	10.9	14.7	18.9
Viscosity Index	102	101	98	95	95	95
Pour Point, °C	-27	-24	-21	-18	-18	-12
Flash Point, °C	210	226	236	240	250	260
Air release @ 50°C	2.9	3.8	6.2	-	-	-



AVAILABLE PACKING

500 ml, 1L, 5L, 55L, 210L etc.

HYDRAULIC AWH

AWH



BRAKE FLUID DOT-3



Paramox Brake Fluid DOT-3 is a polyglycol based brake fluid designed for use in the hydraulic brake system of commercial vehicles and passenger cars operating under moderate service conditions and requiring a DOT 3 type of fluid.

It has excellent low temperature properties and recommended for all conventional drum and disc brake systems. Paramox Brake Fluid DOT 3 can also be used in hydraulic clutch release systems.

FEATURES & BENEFITS

- Excellent lubricity for protection of all clutch and brake system components
- Good viscosity control over wide temperature range facilitates quick and smooth response
- Good chemical stability ensures long trouble free service life
- Excellent seal swell characteristics helps in minimizing leakage
- Compatible with other materials in the clutch and brake system

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	BRAKE FLUID DOT - 3
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	6.7
pH	ASTM D1287	-	30
Equilibrium Reflux Boiling Point	ASTM D1120	°C	185
Wet Equilibrium Reflux Boiling Point	ASTM D1120	°C	-50
Pour Point	ASTM D97	°C	220



AVAILABLE PACKING

100 ml, 250 ml, 500 ml, 1L, 55L, 210L etc.

DOT-3

BRAKE FLUID



BRAKE FLUID DOT-4

Paramox Brake Fluid DOT 4 is a heavy-duty synthetic brake fluid, contains antioxidant, metal deactivator and corrosion inhibitor to ensure long service life of brake fluid and brake components. Due to high boiling point, it does not give vapor lock problems in high temperature working conditions.

For automotive applications where a DOT4 fluid is specified. It should not be used where DOT 5 or mineral oil-based fluids are specified.

FEATURES & BENEFITS

- High boiling point
- Minimum rubber component swell
- Excellent corrosion protection

When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.

PARAMETERS	TEST METHOD	UNIT	BRAKE FLUID DOT - 4
Density @ 15°C	ASTM D1298	kg/l	0.870
Viscosity @ 100°C	ASTM D445	cSt	2.2
pH	ASTM D1287	-	9.0
Equilibrium Reflux Boiling Point	ASTM D1120	°C	260
Wet Equilibrium Reflux Boiling Point	ASTM D1120	°C	-50
Pour Point	ASTM D97	°C	148



AVAILABLE PACKING

100 ml, 250 ml, 500 ml, 1L, 55L, 210L etc.

DOT-4

BRAKE FLUID



GREASE

CALSOPLEX AP-3 GEL GREASE

CALSOPLEX Premium Gel Grease AP-3 is a high-performance red gel-based grease, specially designed to deliver exceptional lubrication, superior water resistance, and long-term stability. Developed with advanced calcium sulfonate complex thickener, this AP-3 grade grease offers maximum protection against wear, rust, and corrosion, even under extreme pressure and temperature conditions.

FEATURES & BENEFITS

- Excellent Water Resistance
- Good Shear Stability
- Highly Resistant to Oil Bleeding



AVAILABLE PACKING

200 Grm, 500 Grm, 1 kg, 5 kg, 18 kg, 180 kg

GREASE

MILITHON MP-3 GREASE

MILITHON MP-3 Grease is a high-quality lithium-based multipurpose grease designed for smooth, long-lasting lubrication across automotive and industrial applications. Its MP-3 (Multi-Purpose Grade) formulation ensures excellent mechanical stability, superior water resistance, and enhanced oxidation protection, making it ideal for daily-use machinery operating under moderate to heavy loads.

Crafted for reliability, MILITHON stands strong in heat, moisture, dust, and pressure, ensuring long service life and reduced maintenance.

FEATURES & BENEFITS

- Outstanding Water Resistance.
- Good Mechanical and thermal stability.
- Good anti-corrosion and anti-rust properties.



AVAILABLE PACKING

200 Grm, 500 Grm, 1 kg, 5 kg, 18 kg, 180 kg



GREASE

LITHON LITHIUM GREASE NLGI-2

LITHON Lithium Grease NLGI-2 is a high-performance general-purpose grease, formulated using premium lithium soap thickener and refined base oils. With its NLGI-2 consistency, LITHON provides the ideal balance between pumpability and adherence—making it suitable for a wide range of automotive, agricultural, and industrial machinery.

Designed for smooth, stable, and long-lasting performance, this grease delivers reliable protection against wear, corrosion, and water washout, even in high-speed or high-load applications.

FEATURES & BENEFITS

- Outstanding Water Resistance
- Good Mechanical and thermal stability.
- Good anti-corrosion and anti-rust properties.



AVAILABLE PACKING

200 Grm, 500 Grm, 1 kg, 5 kg, 18 kg, 180 kg

GREASE

LETHOPLEX LITHIUM GREASE NLGI-3

LETHOPLEX Lithium Grease NLGI-3 is a high-quality, heavy-duty lithium-based grease, specially developed for severe working conditions where enhanced mechanical stability, superior water resistance, and long-lasting protection are critical.

With its NLGI-3 thicker consistency, LETHOPLEX provides excellent adhesion, minimal leakage, and extended lubrication intervals, making it ideal for wheel bearings, suspension points, and high-load industrial applications.

FEATURES & BENEFITS

- Outstanding Water Resistance.
- Good Mechanical and thermal stability.
- Good anti-corrosion and anti-rust properties.



AVAILABLE PACKING

200 Grm, 500 Grm, 1 kg, 5 kg, 18 kg, 180 kg



AIR COMPRESSOR OIL



Paramox RPM Compressor Oils are premium quality Air Compressor lubricants blended with high quality paraffinic base oils and selected anti-oxidant and rust inhibitors to give low carbon forming tendencies in Air compressor applications. They are designed for use in rotary and reciprocating compressors both for stationary and mobile applications. These oils can also be used in vacuum pumps because of their low volatility.

FEATURES & BENEFITS

- Very good oxidation resistance.
- Very good Air release and anti-foam properties.
- Very good rusting and wear protection properties.
- Maintains internal surface cleanliness.
- Longer oil drains intervals.

Properties	32	46	68	100
Viscosity @ 40°C, Cst	32	46	68	98
Viscosity @ 100°C, Cst	5.35	6.65	8.65	10.9
Viscosity Index	99	98	98	95
Pour Point, °C	-30	-27	-24	-21
Flash Point, °C	208	214	234	246
Air release @ 50°C	2.9	3.8	6.2	-

*When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.



AVAILABLE PACKING

5L, 55L, 210L etc.

INDUSTRIAL OIL



REFRIGERATION COMPRESSOR OIL



Paramox REFRIGERATION COMPRESSOR OIL is a set of high-performance, Naphthenic refrigeration compressor oils specially designed to meet the stringent requirements of major refrigeration compressor manufacturers. These oils are formulated with severely hydro-treated naphthenic base oils to provide excellent protection against oxidation degradation, rust & corrosion and foaming & entrained air.

FEATURES & BENEFITS

- Good thermo-oxidative stability controls deposits in evaporator tubes, improves heat transfer and improves oil life
- resulting in improved equipment reliability, availability and efficiency.
- Free from additives and pour point depressants as these have been known to impair the performance of some
- refrigeration systems
- Low pour point and floc point ensures smooth operation at low operating temperatures
- Low ash and carbon forming tendency ensures improved valve performance and reduced potential for fires and explosions in the discharge systems.

Properties	32	46	68
Viscosity @ 40°C, Cst	32.1	45.9	68.9
Density @ 15°C, Kg/l	0.915	0.921	0.921
Flocculation Point, R-12	-40	-36	-31
Pour Point, °C	-42	-39	-36
Flash Point, °C	184	188	206
Rust Test	Pass	Pass	Pass



*When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.



AVAILABLE PACKING

5L, 55L, 210L etc.

INDUSTRIAL OIL



WATER SOLUBLE CUTTING OIL



Paramox Water Soluble cutting oil fluid has been formulated from premium quality base oils and superior additives suitable for lubricating and cooling a wide range of metal cutting and grinding operations.

It is used in machines with low to medium tensile ferrous metals, non-ferrous metals such as aluminum and alloys. It has greater ability to assist the tools in cutting apparatus. It dispersed acidity in water and produces stable emulsion. It can be used for milling, boring and turning

Application

- Oils for all highly-stressed air compressors which require a VCL/VDL oil with DD additives for good dirt dislodging and dirt transportation. Paramox Lubricants can offer the best Compressor oil for your specific application.

Properties	Soluble Cutting Oil
Viscosity @ 40°C, Cst	47.0
Viscosity @ 100°C, Cst	6.8
Flash Point, °C	185
Emulsion	PASS



*When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.



AVAILABLE PACKING

5L, 55L, 210L etc.



INDUSTRIAL OIL



NEAT CUTTING OIL

Paramox Neat cutting oil is non staining type cutting oil blended from high VI Base Oil and contains fatty material enhancing its free flowing and heat dissipation characteristics. Paramox Neat cutting oil recommended for machinery ferrous as well as non ferrous metals and for repetitive machining operations of less severe nature on automatics. It is also recommended for free cutting on mild steel, which involves high spindle speeds and short cycle time.

TYPICAL PROPERTIES

Properties	Neat Cut Ferrous	Neat Cut Non-Ferrous
Viscosity @ 40°C, Cst	22	22
Viscosity @ 100°C, Cst	4.35	4.35
Specific Gravity 15°C	0.865	0.865
Emulsion	Not miscible with water	Not miscible with water



*When choosing oil, please refer to your owner's handbook and the product specifications required may also be suitable for other vehicles.



AVAILABLE PACKING

5L, 55L, 210L etc.

INDUSTRIAL OIL



Manufactured & Marketed by.,
Shed#, New Industrial Area, UMM Al Quwain, UAE

Paramox Industries Pvt. Ltd.,

56 to 65 Sai Industrial E-state, Moje Gam,

Orma (Vodila) Near. Sugar Factory,

Saras Road, Olpad, Surat, Gujarat - 394540

Fast two characters of the Batch No. Indicate
the manufacture and packing location respectively.

Customer Complaints contact Paramox India P. Ltd.,

✉ paramoxindustriespvtltd@gmail.com  **www.paramox.in**

☎ +918141477766