




JOHNCERATM
CERAMICS

web : www.johnceraceramics.com
email : johnceraceramic@gmail.com

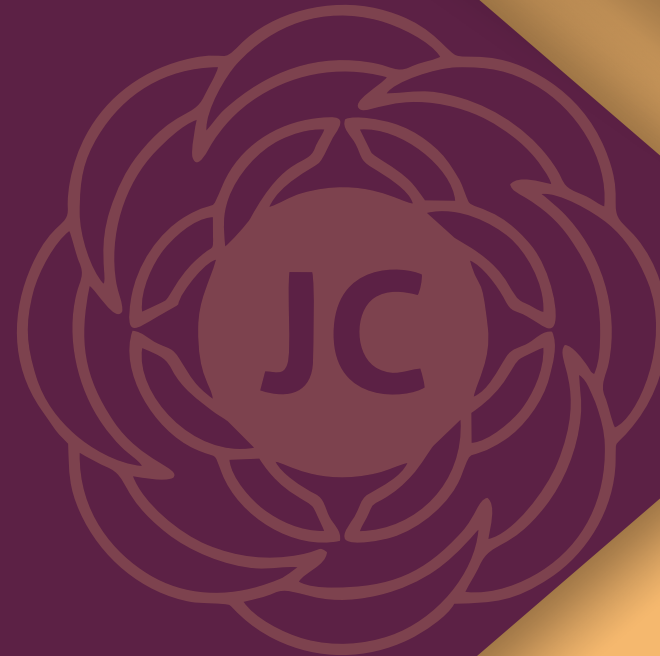

JOHNCERATM
CERAMICS



COPPER (Grey)

Polymer Modified Cement Base Adhesive

Product Description

Floor & Wall Thin Set Adhesive

COPPER is a smooth and creamy thin - set adhesive for installing small to medium format ceramic tiles, Vitrified tiles & natural stones wall stones wall and floor in interior areas. For improved performance and exterior use.

Application

Applying ceramic wall tiles on wall internally, applying vitrified tiles on floor

Shelf life & Storage

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place

Mixing Ratio

20kg. of Copper Powder will require approximately 5 Ltr. to 6 Ltr. of clean drinking water.

Coverage

Approx. 40-50 sq.ft. per 20kg. bag with (6mm *6mm)
Notch trowel for a bed thickness of 3mm

Note : The coverage will vary depending on surface undulations & size of tiles / stone.



Advantages

- High-Bond adhesion strength
- Easy to Apply
- Dual purpose for floor and wall installation with good adhesion and workability
- Extended open time
- Increased Flexibility
- Self - Curing

Suitable Substrates

- Concrete wall and floor areas
- Cement Mortar Beds
- Cement plaster
- Brick Masonry
- Cement Terrazzo

Technical Information :

PROPERTIES	RESULTS
Appearance	: Free Flowing Powder
Colour	: Grey
Pot Life @ 250 c, minutes	: 35 to 45
Open Time, minutes	: >20
Adjustability Time, minutes	: 5
Trafficable Time, hrs.	: 24
Shear Adhesion, M pa	: 8-10
Tensile Adhesion Strength, 14 Days, M pa	: > 1275 N force

Packing : 20 Kg. Bag

COPPER (Grey)
Polymer Modified Cement Base Adhesive





SILVER (Grey)

Polymer Modified Cement Base Adhesive

Product Description

Silver is a premium quality, polymer modified, and multi-purpose thin-set adhesive for fixing Vitrified tiles, Natural Stone and Marble, Glass Brick Wall, Swimming pool Tiles on variety of interior & exterior substrates for wall and floor Application

FOR HEAVY TILES AND STONE APPLY EXTERIOR USE WITH JHONCERA LATEX ADDITIVE

Application

Applying Tiles on Tiles, Applying tiles on Wall internally, applying vitrified tiles on wall. (600x600,600x1200) Applying floor tiles on floor (300x300,400x400mm)

Shelf life & Storage

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place

Mixing Ratio

20kg. Add 5 Ltr. to 6 Ltr. of clean drinking water.

Coverage

Approx. 40-50 sq. ft. per 20kg. bag with (6mm*6mm)
Notch trowel for a bed thickness of 3mm

Note : The coverage will vary depending on surface undulations & size of tiles / stone.



Advantages

- Multipurpose Hi - polymer modified thin-set adhesive
- Hi-bond strength for exterior application of various tiles and Natural stones
- Highly flexible yet strong on bond strength adhesive
- Self - curing
- Economical & Easy to use

Suitable Substrates

- Cement plaster
- Brick Masonry
- Ceramic, Vitrified tiles and stone
- Cement Terrazzo
- Gypsum wall board (For Interior)

Technical Information :

PROPERTIES	RESULTS
Appearance	: Free Flowing Powder
Colour	: Grey
Pot Life @ 250 c. minutes	: 35 to 45
Open Time, minutes	: >20
Adjustability Time, minutes	: 5
Trafficable Time, hrs	: 24
Shear Adhesion, M pa	: 8-10
Tensile Adhesion Strength, 14 Days, M pa	: > 1550 N force



Packing : 20 Kg. Bag

SILVER (Grey)

Polymer Modified Cement Base Adhesive



JOHNCERA CERAMICS

GOLD (Grey)

Polymer Modified Cement Base Adhesive

Product Description

Gold is a premium quality, polymer modified, and multi-purpose thin-set adhesive for fixing Vitrified tiles, Natural Stone and Marble, Glass Brick Wall, Swimming pool Tiles on variety of interior & exterior substrates for wall and floor Application

FOR HEAVY TILES AND STONE APPLY EXTERIOR USE WITH JHONCERA LATEX ADDITIVE

Application

Applying Tiles on Tiles, Applying Ceramic tiles on Wall internally, applying vitrified tiles on wall. (600x600,600x1200,800x800mm & 800x1200mm)

Shelf life & Storage

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place

Mixing Ratio

20kg. Add 5 Ltr. to 6 Ltr. of clean drinking water.

Coverage

Approx. 40-50 sq. ft. per 20kg. bag with (6mm*6mm)
Notch trowel for a bed thickness of 3mm

Note : The coverage will vary depending on surface undulations & size of tiles / stone.



Advantages

- Hi - polymer modified thin-set adhesive
- Hi-bond strength for exterior application of various tiles and Natural stones
- flexible yet strong on bond strength adhesive
- Self - curing
- Economical & Easy to use

Suitable Substrates

- Concrete, concrete mortar beds
- Cement plaster
- Brick Masonry
- Ceramic, Vitrified tiles and stone
- Cement Terrazzo
- Gypsum wall board (For Interior)

Technical Information :

PROPERTIES	RESULTS
Appearance	: Free Flowing Powder
Colour	: Grey
Pot Life @ 250 c. minutes	: 35 to 45
Open Time, minutes	: >20
Adjustability Time, minutes	: 5
Trafficable Time, hrs	: 24
Shear Adhesion, M pa	: 8-10
Tensile Adhesion Strength, 14 Days, M pa	: > 1680 N force



Packing : 20 Kg. Bag

GOLD (Grey)

Polymer Modified Cement Base Adhesive






Available Shade:



White



Grey



Pink



Brown




Terracotta



Ivory



T. Blue



Black



Black



Jesalmer

TILES GROUT (One Pack)

Polymer Modified Cement Base Grout



TILES GROUT (One Pack)

Polymer Modified Cement Base Grout

Product Description

JOHNCERA Tile Grout is a superior Quality and higher polymer modified cementitious tile grout used for interior and exterior application. It is suitable for grouting ceramic tiles, vitrified tiles, marbles, pavers and natural stones in wall and floor areas. For better performance it is recommended to use tile grout with JOHNCERA ADDITIVE Mixture.

Application

Used for filling tile grouting 1mm to 4 mm in both interior and exterior areas. (Kitchens, Bathrooms, Balconies, Terraces, Swimming Pool, Showrooms... etc.)

Mixing Ratio

Use approx. 300ml to 400ml of water or Additive mixture for 1kg. of Tile Grout

Coverage

Varies with tile size and grout width.

Shelf life & Storage

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place



Advantages

- Colour – fast
- Easy to mix, Apply and Clean up
- Smooth & glossy finish
- Water resistant formation
- Mold resistance
- Non-cracking

**Methods & Site conditions
Cleaning**

- Clean and remove any loose particles.
- Make sure that the tiles joints are clean and saturated and excess water is removed from joints before grouting.

Technical Information :

PROPERTY'S	RESULTS
Pot Life @ 20 c, minutes	: 60
Open Time, minutes 30	: 30
Adjustability Time, minutes	: 15 to 20
Initial set @ R.T, hours	: 2
Final set @ R.T, hours	: 8
Shrinkage%	: <0.1
# Water Absorption, %	: 8.3



Packing : 1 Kg.

TILES GROUT (One Pack)

Polymer Modified Cement Base Grout






















EPOXY GROUT (3 Part)

High Performance Epoxy Grout

Available Shade:

 Marvel-101-Royal Brown	 120- Sapphite	 220- Blue	 320- Blue
 102- Canyon Red	 Silver-201- Amazon Red	 Gold-301- Amazon Red	 Copper-401-Amazon Red
 104-Dusty Rose	 202- Canyon Red	 302- Canyon Red	 402- Canyon Red
 106- Slate Grey	 206- Ash Grey	 306- Ash Grey	 406- Ash Grey
 107-Midnight Black	 207- Serne Black	 307- Serne Black	 407- Serne Black
 108- White	 209-Ocean Blue	 317- Dark Chocolate	 417- Dark Chocolate
 117- Sadle	 217- Dark Chocolate	 318- Silver Mellow	 420- Blue



EPOXY GROUT (3 part)

High Performance Epoxy Grout

Product Description

JOHNCERA Epoxy Grout is specifically designed for use in application of ceramic tiles, vitrified tiles, marble, glass mosaic tiles and stone where styling is expected

36 Shade Available in Different Color
33 Shade Available in Glitter

(11-Gold, 11-Silver, 11-Copper=33)

Coverage

Varies with tile size and grout width.

Unit consisting of three conveniently packed components-Resin & Hardener(Part-A, Part-B) and coloured filler Powder (Part-C).

Kit	Filler	Resin	Hardener
5 kg	3.5 kg	1 kg	500gm
1 kg	700gm	200gm	100gm



Packing : 1 Kg. & 5 Kg.

EPOXY GROUT (3 Part)

High Performance Epoxy Grout



Application

- Kitchens
- Bathrooms
- Swimming Pools
- Hospitals / Laboratories
- Spa & Sauna
- Water bodies
- Industrial Application

Advantages

- Easy to apply and clean
- Colour - fast & 100% Stainfree
- Acid / Chemical Resistant
- Non - Cracking or Powdering
- Anti - Fungal & Anti - Bacterial
- Available in Range of attractive Colors

Technical Information :

PROPERTIES	RESULTS
Shear Adhesion Strength	: >2N/mm ²
Abrasion Resistance	: =250mm ³
Mechanical Flexural Strength	: =30N/mm ²
Compressive Strength	: =45N/mm ²
# Water Absorption, %	: Nil(1)
Tensile Adhesion (14 day air)	
Epoxy Grout	: >4.5 Dry Condition(kN)
Epoxy Grout	: >3.6 Wet Condition(kN)



TILE CLEANER

General Purpose Tile Cleaner

Application

A Powerful, Heavy duty, Acid-based cleaner for ceramic and vitrified tiles - wall and floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

Coverage

Coverage depends on the porosity of the surface, stains, dilution etc.

Note : Do not use on surface that are not resistance to acid such as natural stones terrazzo and CP fittings.



Packing : 500ml, 1Ltr & 5Ltr.

TILE CLEANER

General Purpose Tile Cleaner



Application

- Interior & Exterior
- Wall & Floor

Advantages

- Powerful formula
- Fast acting
- Easy to apply
- Removes Cement film
- Ideal for interior & exterior areas



FURNITURE EPOXY



FURNITURE EPOXY



TILES SPACER

For Consistent and Even Spacing of Tiles



Product Description

At the most basic level, spacers have a pretty simple purpose: they will allow you to keep the tiles at equal distance, enabling you to space them correctly and get a symmetrical result. However, their benefits don't stop here. Here's how spacers can make your life easier and ensure that the installation process goes a bit smoother than before.

Method of Application

If you plan to undertake tile installation at home, be sure to obtain some tile spacers for your project. Spacers are small cross-like or t-shaped pieces of plastic, ceramic or wood which help you to space your tiles apart in equal distances. They come in various sizes, although most commonly used spacers range in with from 1/4 to 3/8 of an inch.

To use spacers, you need to lay 4 tiles at a time on the work surface. you place the spacers at the corners of each tile and then push the tiles together until they can go no further. Once you complete your tile installation, you can remove the spacer and save them for future project. Spacer can help you to accomplish a well installed and attractive tile arrangement on floor walls or countertops in your home.

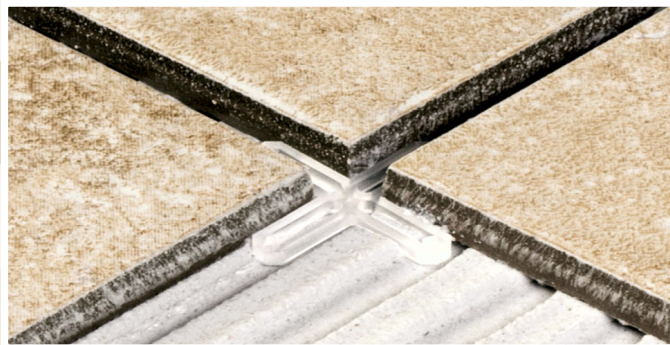

Packing : 100 pcs. per packet
Size : 2mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm



TILES SPACER

For Consistent and Even Spacing of Tiles




TILES EQUALIZER

Tiles Leveling and Equalizing Surface

Product Details:

Leveling system is an innovative product that will greatly assist most anyone in the installation of stone, ceramic, marble, granite and large format slab tiles. It is designed to create virtual lippage free installation when used on floor or wall. The system interlocks the tiles, virtually creating single flat slab surface while the setting material is curing. The interlocking design of the system reduces and in most cases eliminates settling from shrinkage, as well as minimizing the possibility of warping. The system reduces the need to re-lift tiles to add more mud and or the process of shiming tiles, thus greatly increasing the speed of installation, all the while creating that much desired lippage free mirror surface. In addition, the caps are reusable dozens of times.

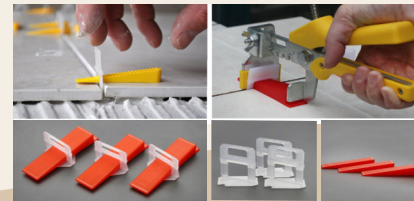

Advantages


- Specifically angled pliers for use on floor
- Sturdy steel construction with adjustable tension
- Tiles are pushed, not lifted, providing better tile adhesion
- Improves speed of tile laying
- The most economical tile leveling system
- The equalizer are reusable dozens of times

Applications

- Walls
- Floors
- Interiors
- Exteriors
- Dry & Wet Areas
- Showers
- Swimming pools

Demand Quantity (Clip/m²)

Size/Area	1 st m	2 nd m	5 th m	10 th m	20 th m	50 th m
30x30 cm	12	24	60	120	240	600
40x40 cm	25	50	125	250	500	1250
50x50 cm	15	30	75	150	300	750
30x60 cm	18	36	90	180	360	900
60x60 cm	12	20	50	100	200	500
80x80 cm	10	20	45	80	140	360



Packing : 50 Clips + 50 Wedge



Packing : 50 Pcs. + 1 Tools



TILES EQUALIZER(Reusable)

Tiles Leveling and Equalizing Surface

How To Apply?

Method of Installation : Tiles & Stone Adhesive


Mixing Ratio

- 20kg. of Adhesive Powder will required approximately 5 Ltr. to 6 Ltr. of clean drinking water.
- Slowly and adhesive powder into a clean bucket with the measure water.
- Slowly mix with a drill & quality mixing paddle to ensure a smooth lump free tooth paste consistency.
- Leave the mix for 5 to 10 min. then re-stir. The adhesive is now ready for use.

Cleaning

- Clean tools and tile work with water while adhesive is fresh.


* The powder - Liquid ratio may vary according to job conditions.

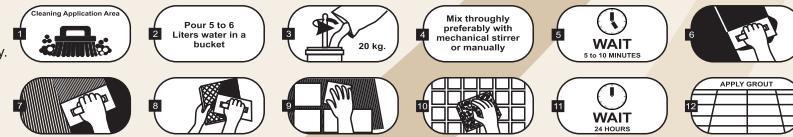

Method of Installation : Tiles Grout

Cleaning

- Clean and remove any loose particles
- Make sure that the tiles joints are clean and saturated and excess water is removed from joints before grouting.

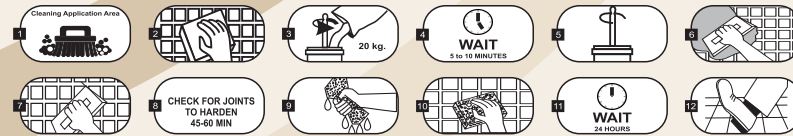

Method of Installation : Premium Epoxy Grout

- All Surface must be clean & remove any excess particles
- Do not mix with other chemicals
- Clean the tile surface with water & soap solution after 12-24 hours of grouting to remove epoxy haze.

