



TIME® 5100/5102/5104

PORTABLE HARDNESS TESTER

Standard Delivery

- Main unit 1
- Test block HLD 1
- USB connecting cable 1
- Cleaning brush 1
- Battery AAA 1.5V 2
- TIME certificate 1
- Warranty card 1
- Instruction manual 1

Optional Accessory

- Support rings
- Dataview software

Features


- Light Mini Unit with simple menu, easy and convenient to use
- Conversion of hardness scales(HL, HV, HB, HRC, HRB and HS)
- USB interface to connect the PC, assisted by Software Dataview TH51X (especially for TH51X series Hardness Test) with both online measurement and offline data analysis mode: curve chart, data sheet, setting of tolerance limit and data report are available.
- Connected to Printer by RS 232 and test values can be printed directly
- Measuring Direction:Any direction 360°
- Automatic identification of impact test direction
- Memory of 270 data in 9 group
- Backlight for convenience in darkness
- Upper / lower limits setting
- AAA 1.5V battery, whose capacity shown in display
- Auto power off
- TIME®5100: integrated with D impact device for the majority of hardness testing requirements
- TIME®5102: integrated with C impact device for hardness testing on thin, light and surface hardened components
- TIME®5104: integrated with DL impact device for hardness testing of deep grooves and tooth surface



Technical Specification


Model	TIME®5100	TIME®5102	TIME®5104
Impact device	D integrated	C integrated	DL integrated
Hardness scales	HLD, HB, HRC, HRB, HV, HS	HLC, HB, HRC, HRB, HV, HS	HLDL, HB, HRC, HRB, HV, HS
Accuracy	±6HLD(760 ±30HLD)	±12HLC	±12HLDL
Memory	270 average readings in 9 group files		
Output	RS 232 to printer	RS232 to printer	RS232 to printer
Min. surface roughness of work piece	1.6µm (Ra)	0.4µm (Ra)	1.6µm (Ra)
Max. work piece hardness	960HLD	960HLC	950HLDL
Min. radius of work piece (convex/concave)	Rmin = 50mm (with support ring Rmin=10mm)	Rmin=11mm (with support ring)	Rmin = 10mm (with support ring Rmin=10mm)
Min. work piece weight	2~5kg on stable support 0.05~2kg with compact coupling	0.5~1.5kg on stable support 0.02~0.5kg with compact coupling	2~5kg on stable support 0.05~2kg with compact coupling
Min. work piece thickness coupled	5mm	1mm	5mm
Min. thickness of hardened layers	0.8mm	0.2mm	0.8mm
Indentation depth	Impact devices data	Impact devices data	Impact devices data
Continuous working time	8h (without backlight)		
Power	AAA 1.5V batteries		
Operating temperature	0~40°C	0~40°C	0~40°C
Dimensions (mm)	155×55×25	160×60×25	215×60×25
Weight (g)	180	180	180

Online measurement

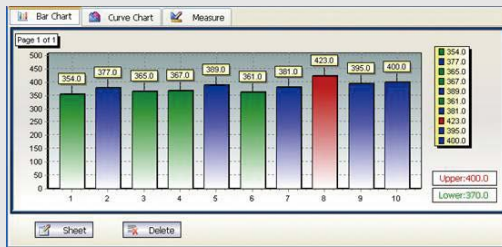


Data analysis

Bar chart

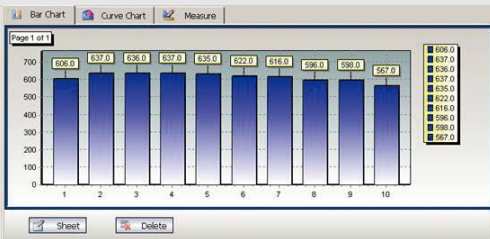

Curve chart

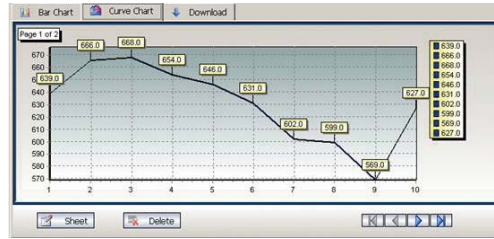

Data sheet

ID	Value	Tolerance Limit
1	644.0	
2	647.0	
3	635.0	
4	643.0	
5	638.0	
6	636.0	
7	640.0	
8	643.0	
9	632.0	
10	635.0	

Dataview TH51X is special software for TH51X series Hardness Tester. The data stored in the Hardness Tester TH51X series can be transferred to the PC for further analysis with Dataview TH51X. It has online measurement mode and offline analysis mode, data analysis, graphics display and print output functions are all available.

Setting of tolerance limit


Data report

ID	Meas. Time	Value	Scale	Model	Material	Direction	Average
7	2009-02-03	572.0	HL	DL	Steel and Cast Steel	Vertical Down	3
8	1"	648.0					
10	2"	676.0					
11	3"	692.0					
12	2009-02-03	700.0	HL	DL	Steel and Cast Steel	Vertical Down	3
13	1"	691.0					
14	2"	700.0					
15	3"	700.0					
16	2009-02-03	596.0	HL	DL	Steel and Cast Steel	Vertical Down	3
17	1"	707.0					
18	2"	703.0					
19	3"	683.0					
20	2009-02-03	488.0	HL	DL	Steel and Cast Steel	Vertical Down	3
21	1"	676.0					
22	2"	682.0					
23	3"	703.0					
24	2009-02-03	599.0	HL	DL	Steel and Cast Steel	Vertical Down	3
25	1"	700.0					
26	2"	696.0					
27	3"	702.0					
28	2009-02-03	572.0	HL	DL	Steel and Cast Steel	Vertical Down	3
29	1"	648.0					
30	2"	676.0					

TIME[®] 5100/5102/5104

SOFTWARE

Impact Devices for Portable Hardness Tester

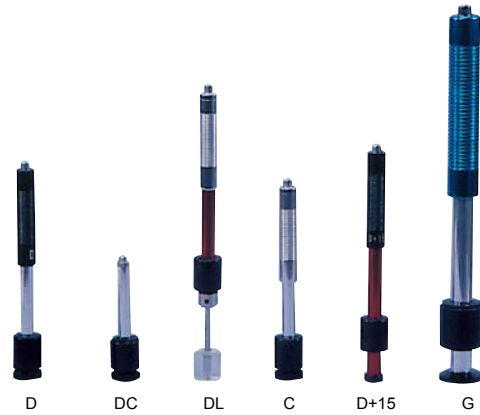

Measuring range of TIME Leeb hardness tester

Material	Hardness scale	Impact device					
		D/DC	D+15	C	G	E (imported)	DL
Steel and cast steel	HRC	17.9~68.5	19.3~67.9	20.0~69.5		22.4~70.7	20.6~68.2
	HRB	59.6~99.6			47.7~99.9		37.0~99.9
	HRA	59.1~85.8				61.7~88.0	
	HB	127~651	80~638	80~683	90~646	83~663	81~646
	HV	83~976	80~937	80~996		84~1042	80~950
	HS	32.2~99.5	33.3~99.3	31.8~102.1		35.8~102.6	30.6~96.8
Steel	HB	143~650					
CWT. steel	HRC	20.4~67.1	19.8~68.2	20.7~68.2		22.6~70.2	
	HV	80~898	80~935	100~941		82~1009	
Stainless steel	HRB	46.5~101.7					
	HB	85~655					
	HV	85~802					
GC. iron	HRC						
	HB	93~334			92~326		
	HV						
NC. iron	HRC						
	HB	131~387			127~364		
	HV						
C. Alum	HB	19~164		23~210	32~168		
	HRB	23.8~84.6		22.7~85.0	23.8~85.5		
Brass	HB	40~173					
	HRB	13.5~95.3					
Bronze	HB	60~290					
Copper	HB	45~315					

Tolerance and repeatability

No.	impact device	Hardness value of Leeb standard hardness block	Accuracy of displayed value	Repeatability of displayed value
1	D	790±40HLD 530±40HLD	±6 HLD ±10 HLD	6 HLD 10 HLD
2	DC	790±30HLDC 530±40HLDC	±6 HLDC ±10 HLDC	6 HLDC 10 HLDC
3	DL	894±40HLDL 736±40HLDL	±12 HLDL	12 HLDL
4	D+15	795±40HLD+15 544±40HLD+15	±12 HLD+15	12 HLD+15
5	G	590±40HLG 500±40HLG	±12 HLG	12 HLG
6	E	755±40HLE 508±40HLE	±12 HLE	12 HLE
7	C	851±40HLC 590±40HLC	±12 HLC	12 HLC

Technical specification

Types of impact device	DC(D)/DL	D+15	C	G	E(imported)
Impact energy Mass of impact body	11mJ 5.5g/7.2g	11mJ 7.8g	2.7mJ 3.0g	90mJ 20.0g	11mJ 5.5g
Test tip hardness Diameter of test tip Material of test tip	1600HV 3mm Tungsten carbide	1600HV 3mm Tungsten carbide	1600HV 3mm Tungsten carbide	1600HV 5mm Tungsten carbide	5000HV 3mm Diamond
Impact device diameter Impact device length Impact device weight	20mm 86(147)/ 75mm 50g	20mm 162mm 80g	20mm 141mm 75g	30mm 254mm 250g	20mm 155mm 80g
Max. hardness of sample	940HV	940HV	1000HV	650HB	1200HV
Roughness of sample surface:	1.6µm	1.6µm	0.4µm	6.3µm	1.6µm
Minimum weight of sample: Measure directly Need support firmly Need coupling tightly	>5kg 2~5kg 0.05~2kg	>5kg 2~5kg 0.05~2kg	>1.5kg 0.5~1.5kg 0.02~0.5kg	>15kg 5~15kg 0.5~5kg	>5kg 2~5kg 0.05~2kg
Min. thickness of sample Coupling tightly Min. depth of layer thickness for surface	5mm ≥0.8mm	5mm ≥0.8mm	1mm ≥0.2mm	10mm ≥1.2mm	5mm ≥0.8mm


Size of tip indentation

Hardness 300HV	Indentation diameter	0.54mm	0.54mm	0.38mm	1.03mm	0.54mm
	Depth of indentation	24µm	24µm	12µm	53µm	24µm
Hardness 600HV	Indentation diameter	0.54mm	0.54mm	0.32mm	0.90mm	0.54mm
	Depth of indentation	17µm	17µm	8µm	41µm	17µm
Hardness 800HV	Indentation diameter	0.35mm	0.35mm	0.35mm	—	0.35mm
	Depth of indentation	10µm	10µm	7µm	—	10µm
		D: General test. DC : Testing hole or inner of cylinder. DL : Test slender narrow groove or hole.	D+15 : Test groove or reentrant surface.	C : Test small, light, thin parts and surface of hardened layer.	G : Test large, thick, heavy and rough surface cast steel.	E : Test super high hardness Material.



Optional Support Rings

Function: they are used for tested surface whose curvature radius is less than 30mm (D, DC, D+15, C,E Impact devices) or less than 50mm (G impact device) .

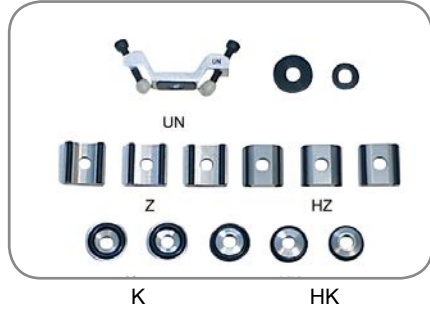

Support Rings



No.	Type	Sketch of non-conventional supporting ring	Remarks
1	Z10-15		For testing cylindrical outside surface R10~R15
2	Z14.5-30		For testing cylindrical outside surface R14.5~R30
3	Z25-50		For testing cylindrical outside surface R25~R50
4	HZ11-13		For testing cylindrical inside surface R11~R13
5	HZ12.5-17		For testing cylindrical inside surface R12.5~R17
6	HZ16.5-30		For testing cylindrical inside surface R16.5~R30
7	K10-15		For testing spherical outside surface SR10~SR15
8	K14.5-30		For testing spherical outside surface SR14.5~SR30
9	HK11-13		For testing spherical inside surface SR11~SR13
10	HK12.5-17		For testing spherical inside surface SR12.5~SR17
11	HK16.5-30		For testing spherical inside surface SR16.5~SR30
12	UN		For testing cylindrical outside surface, radius adjustable R10~∞