

ELECTRO HYDRAULIC LIFT

Specially For Washing And Brake /
Suspension Service Jobs




TECHNICAL SPECIFICATIONS

- ❖ No Need of Major Civil Work
- ❖ Save 95% of Hydraulic oil (12 liter)
- ❖ No Need of Compressor to Operate Special Rubber Pads
Saves damages of Vehicles Sensors while Lifting

Lift Capacity - 4 Ton
Lift Height - 5.5 ft
Power - 3 phase / 1 phase
Weight - 240 kg.
Length - 8 foot 4 inch
Breath - 3 foot 5 inch

ELECTRO HYDRAULIC LOW RISE LIFT


For Tyre Changing And Balancing

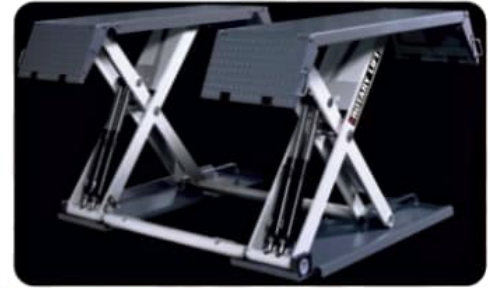

TECHNICAL SPECIFICATIONS

Lifting Capacity	- 3.5 ton
Raising / Lowering Time	- 60 sec./ 25 sec.
Maximum Raised Height	- 900 mm
Overall Width	- 100 mm
Overall Length	- 2000 mm
Platform width	- 2050 mm
Hydraulic Oil Type	- 1500 mm
Oil Tank Capacity	- ISO 32 (12 kg) hydraulic Oil
Max.Operation Hydraulic Pressure	- 12 L
Power Supply	- 230 V, 1 Ph, 50/60 Hz

AIR COMPRESSOR

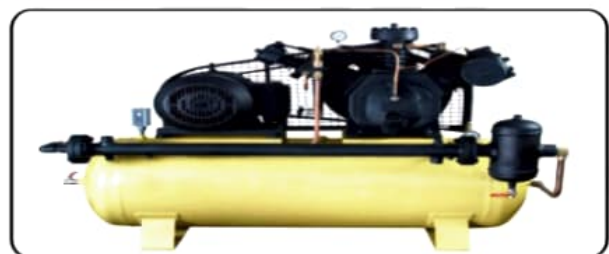



UNIQUE TECH

E N G I N E E R I N G

Being a pioneer organization in the industry, we are engaged in Manufacturing and Supplying qualitative Scissor Lift, Car Washing Lift, Balancing Lift and Automobile Equipment.



CHIRAG PATEL
+ 91 99796 74433



KALPESH CHAUDHARI
+ 91 97259 28715



uniquetechengineering@gmail.com



UNIQUE TECH

E N G I N E E R I N G

