

mtanddt

S I N C E 1 9 7 4


MLIT

Portable Site Light

PS-200

Deployable portable lighting in one
bespoke robust package.

be.sure
get more.

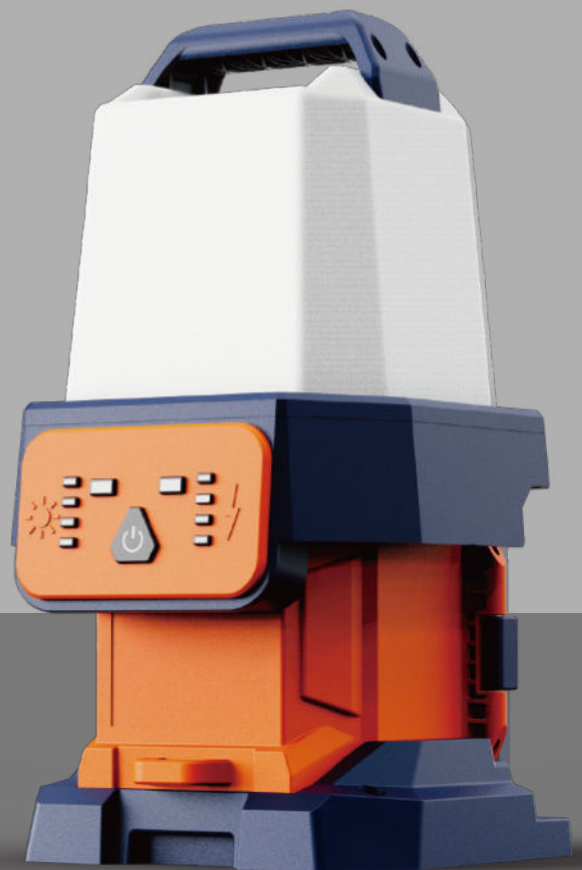

**UP TO
6000LM**


Turbo 6,000LM

Standard 3,500LM

Balanced 2,200LM

Eco 600LM

Application



Ultra-long Endurance

Standard Mode Up To **8+** Hours
(D24-100)

Various working modes.



IP66



IK10



Dimmable



360° Lighting




Light-weight



Long Working Hour






Placed on any surface or hung up to provide continuous lighting for complex environments.

2KG

Ultra-lightweight and capable of carrying multiple at once.



360-degree lighting that can illuminate all details even in small spaces.


360° lighting

Specifications

PS-200

Weight	2.0kg (Fitting only)
Power Supply	Battery
Lumens	0 - 5,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP66
Battery System	D24 Series
Working Temp.	-10℃~50℃
Working Humidity	1~98%

Size (mm)

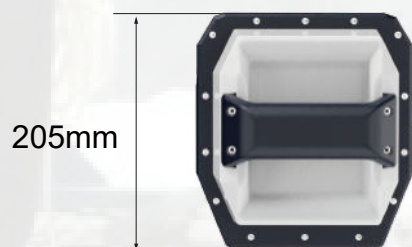

Package

Model	Size of Carton	Gross Weight of Carton	PCS/Carton
PS-200	220x240x500mm	2.3KG±5%	1



www.mtandt.com



+91 81222 04002



mlit@mtandt.com