




Product Specification


Indoor LC2.5E

Product Picture of Indoor LC2.5E Series

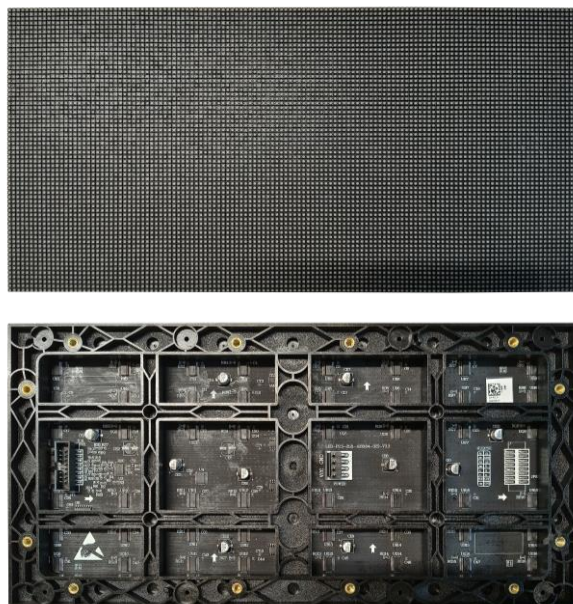



Note: The picture is for reference only, the specific object shall prevail.

Hole Position of Indoor LC2.5E Series

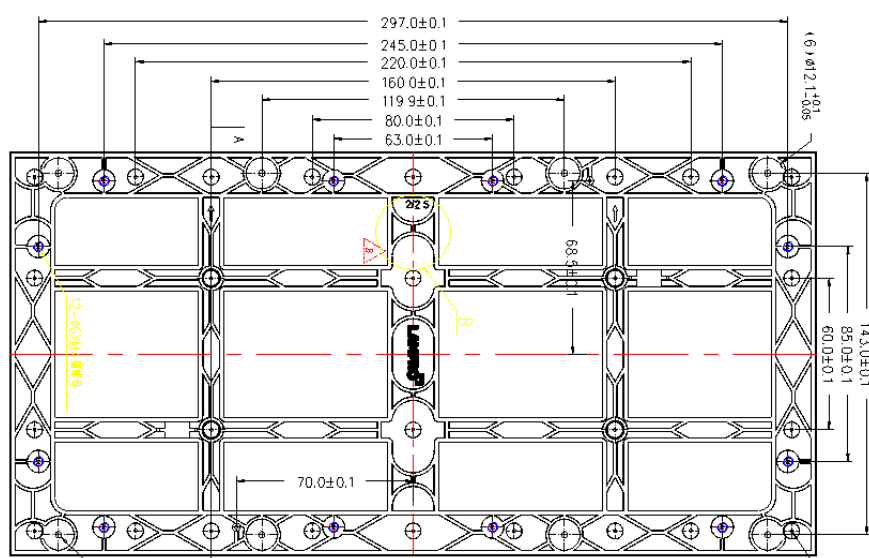

Note: Drawings are for reference only.

Wiring Diagram of Data and Power

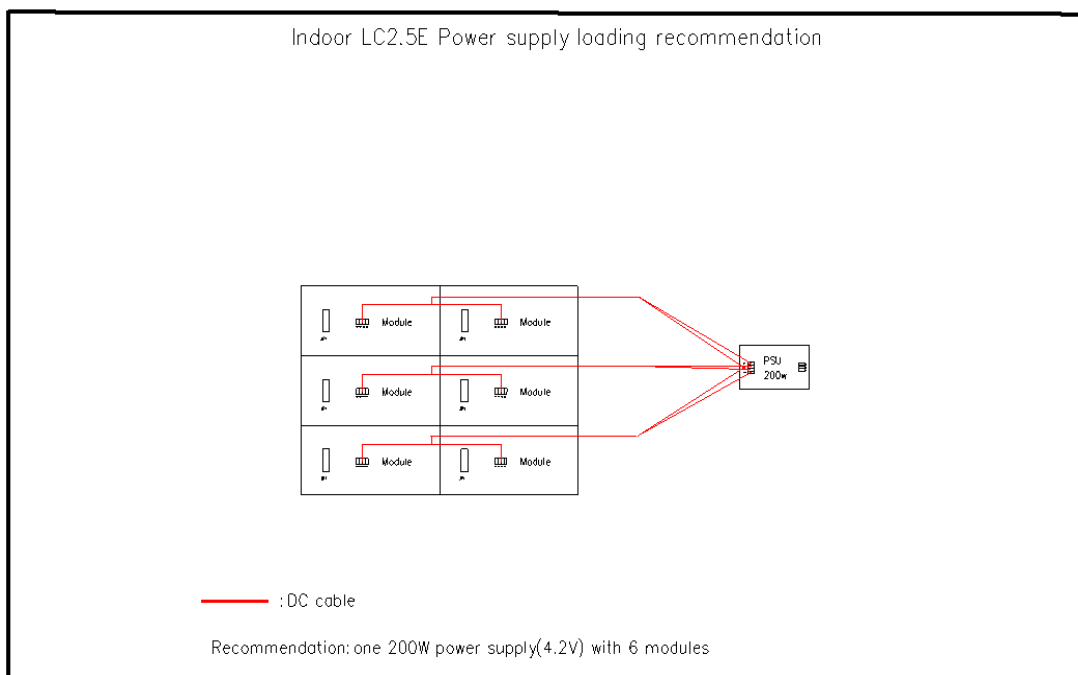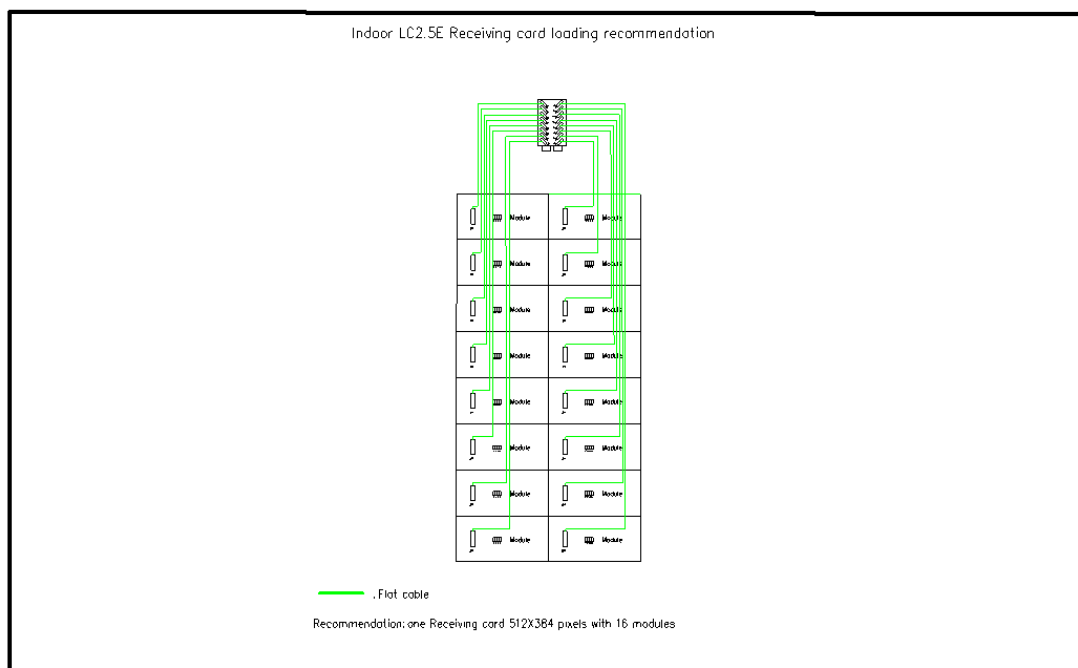

Remark:

1. The recommended diagrams are for reference only.
2. The recommended cabinet size is 640X480 mm.

Parameter of Indoor LC2.5E Series

	Parameter Name	Product Parameter
Module	LED Type	SMD2121
	Pixel Pitch	2.5mm
	Module Resolution (W×H)	128X64=8192 Pixels
	HUB	HUB75
	Module Dimension (W×H×D)	320mm×160mm×16.6mm
	Module Weight	0.46±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	≥500 CD/m ²
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	5000 : 1
Electronic	Input Power <Max>	488W/m ²
	Input Power <Typical>	163W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Refresh Rate	1920Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	100000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C–45°C / 10%-50%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-20°C–50°C / 10%-60%RH (No Condensation)

- Remark:
1. The above parameters are typical or recommended.
 2. Product parameters or configuration adjustments without notice.
 3. Customized products, please confirm the parameters with our company.