


ALL INDIA NETWORK

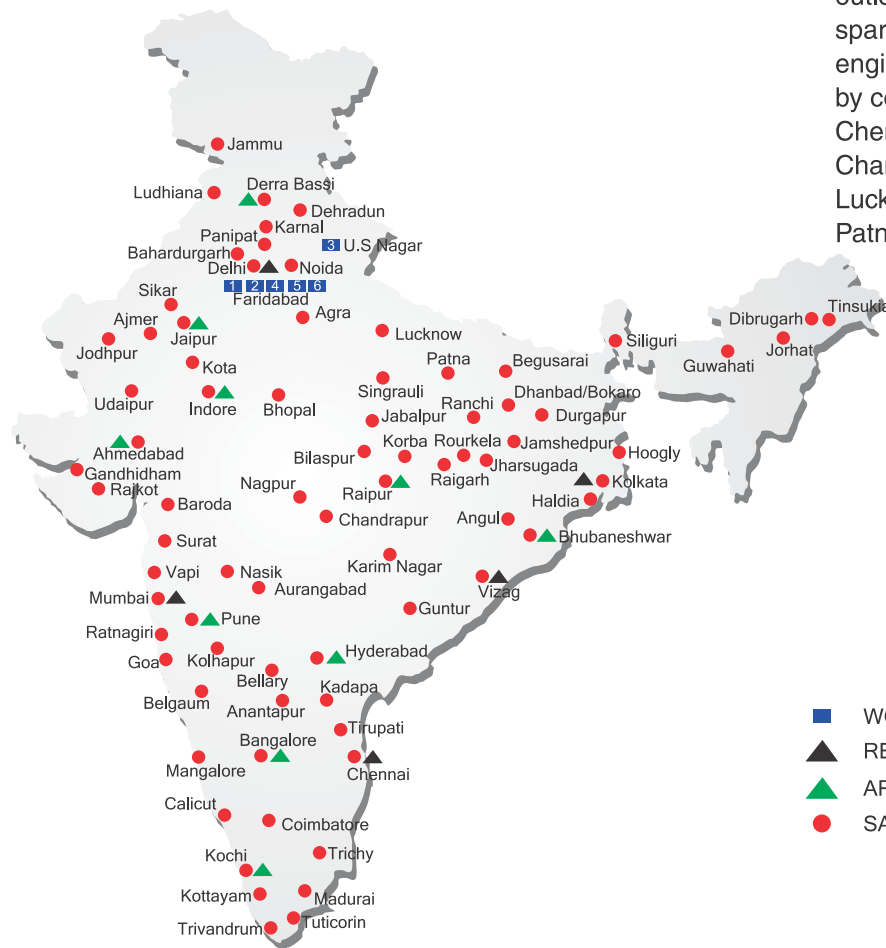

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS



ACE

Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 10%. Accessories if shown are not part of the Standard Equipment.

MARKETING H.Q.

5th Floor, "TDI Center", Jasola, New Delhi - 25
Ph.: +91-11-40549900 (30 Lines) Fax: 40549922
E-mail: marketing@ace-cranes.com

FORKLIFT DIVISION HQ/DELHI OFFICE

7, Pocket-H, 11nd Floor, L.S.C., Sarita Vihar, New Delhi - 76
Ph.: +91-11-49390000 (30 Lines) Fax: 49390099
E-mail: forklifts@ace-cranes.com, forkliftsnorth@ace-cranes.com

MUMBAI OFFICE

31 Kalpataru Court, Dr. C. Gidwani Marg, Chembur, Mumbai - 400074, India
Ph.: +91-22-25206846, 25207069-70 Fax: +91-22-25207071
E-mail: acemumbai@ace-cranes.com, forkliftswest@ace-cranes.com

KOLKATA OFFICE

"Fomra Towers" 84-A, Second Floor, AJC Bose Road, Kolkatta - 14. Ph. 033-32578307, Telefax: 22274428
E-mail: acekolkatta@ace-cranes.com, forkliftseast@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road, Alwar Pet, Chennai - 18
Ph.: 044 - 24314253 Telefax: 24314252
E-mail: acechennai@ace-cranes.com, forkliftssouth@ace-cranes.com



www.ace-cranes.com

AF 120D-AF 200D0813

ACE

FORKLIFTS

Capacity : 13 - 20 tonnes

High Performance and rugged Forklift Trucks.

ACE INDIA'S NO. 1
MOBILE & TOWER CRANE CO.



*Nothing beats an **ACE***



SPECIFICATIONS




Model			Unit	AF 130D	AF 160D	AF 200D
Load Capacity			Kg.	13000	16000	20000
Load Center			mm	600	1220	1220
Power				Diesel		
Tyres Front / Rear				Pneumatic		
Wheel (s) Front / Rear				4/2		
Fork Size (LxWxT)			mm	1220X180X100	2440X180X110	2440X260X110
Tilt Angle (α - β)			deg	6° - 12°		
Turning Radius (Outside)			mm	4450	5800	5800
Right Angle Stacking Aisle Width (Add Load length and Clearance)			mm	4200	7920	8575
Speed (s)	Travel (Fwd / Rvs)	With Load	Km/h	25/10	26	24
		Without Load	Km/h	30/12	30	28
	Lifting	With Load	mm/s	290	260	240
		Without Load	mm/s	330	300	300
	Lowering	With Load	mm/s	400	≤500	≤500
		Without Load	mm/s	400	≤500	≤500
Gradeability With / Without Load			%	20	20	20
Total Weight			Kg	14500	23000	27500
Weight Distribution	With Load	Front	Kg	23500	33300	42300
		Rear	Kg	3000	5700	5200
	Without Load	Front	Kg	6300	10400	12400
		Rear	Kg	8200	12600	15100
Tyre Sizes		Front		9.00-20/14PR	4x12.00-24/18PR	4x14.00-24/24PR
		Rear		9.00-20/14PR	2x12.00-20/18PR	2x14.00-20/24PR
Brake (s)	Service			Hydraulic	Caliper disc brake	
	Parking			inside expanding manual brake		
Battery	Voltage / Capacity		V / AH	(12V/80Ah)x2	2x12V / 120	
Engine	Rated Horsepower		bhp/r.p.m	130HP@ 2200	190 HP@ 2200	215 HP@ 2200
	Rated Torque		N.m(Kg.m)/r.p.m	560/1500	800/1500	908/1500
	Number of Cylinders		Nos.	6	6	6
	Displacement		Ltrs.	5.9	5.9	8.3
	Fuel Tank Capacity		Ltrs.	150	300	300
	Make/Model			Cummins 6BTAA5.9-C130	Cummins 6BTAA5.9-C190	Cummins 6CTA8.3-C215
Transmission	Number of Speeds - Fwd / Rvs			2F/2R	2F/1R	
				2F/2R	2F/1R	
Operating Pressure	For Attachment		Kg / cm²	5Mpa	180	

Standard Equipment

- ROPS Cabin with AC
- Fork Positioner
- Lights
- Joystic control
- Wide view Mast
- Standard forks
- Power steering
- Standard seat (adjustable)
- Turn indicator lights
- Hour meter
- Rear view mirrors

Optional Equipment

- Solid cushion tyres
- Different mast heights
- Side shifter-cum-Fork positioner (in lieu of Fork positioner)
- Canopy (in lieu of AC cabin)

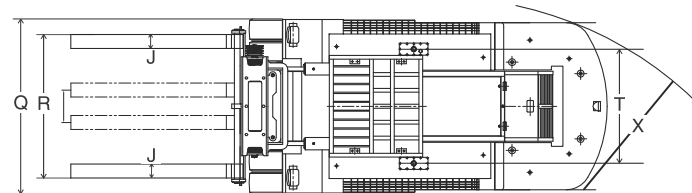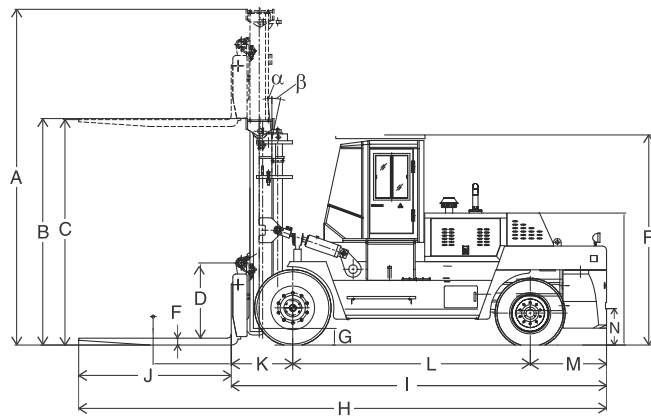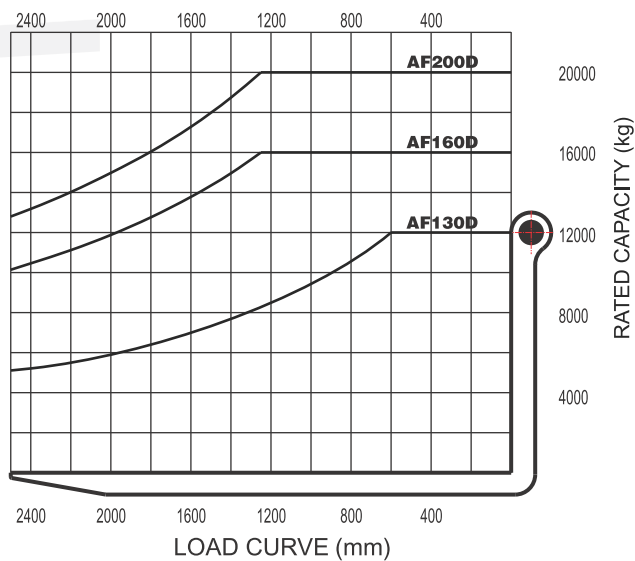

STANDARD DIMENSIONS

Model	AF 130D	AF 160D	AF 200D
	mm	mm	mm
A. Overall height form raised	5040	5395	5370
B. Max. fork height (Standard Model)	3500		
C. Overall height fork lowered	3350	3625	3600
D. Backrest height (from upper face of forks)	1010	970	960
E. Free lift	230	—	—
F. Fork thickness	100	110	110
G. Min. clearance (bottom of mast)	250	235	250
H. Overall length (with forks)	5915	8220	8540
I. Overall length (without forks)	4700	5780	6100
J. Fork length	1220	2440	2440
K. Front overhang	770	917	975
L. Wheel base	3200	3800	4000
M. Rear overhang	730	1130	1275
N. Coupler height	450	1585	1832
O. Overhead guard clearance (from face to seat)	1110	1050	1050
P. Overall height (overhead guard)	2590	3360	3580
Q. Overall width	2200	2750	3020
R. Lateral fork adjustment	420-2080	666-2264	808-2264
S. Tread (front)	9.00-20/14PR	2060	2200
T. Tread (rear)	9.00-20/14PR	2330	2390
U. Fork width	180	180	260
V. Inside turning radius	500	790	760
W. Outside turning radius	4450	5800	5800
X. Min. intersecting aisle	4200	4600	5000
Y. Tilting angles (α – β)	6° – 12°		

*RASA = Right Angle Stacking Aisle, a = Clearance, b = Load Length