


ALL INDIA NETWORK

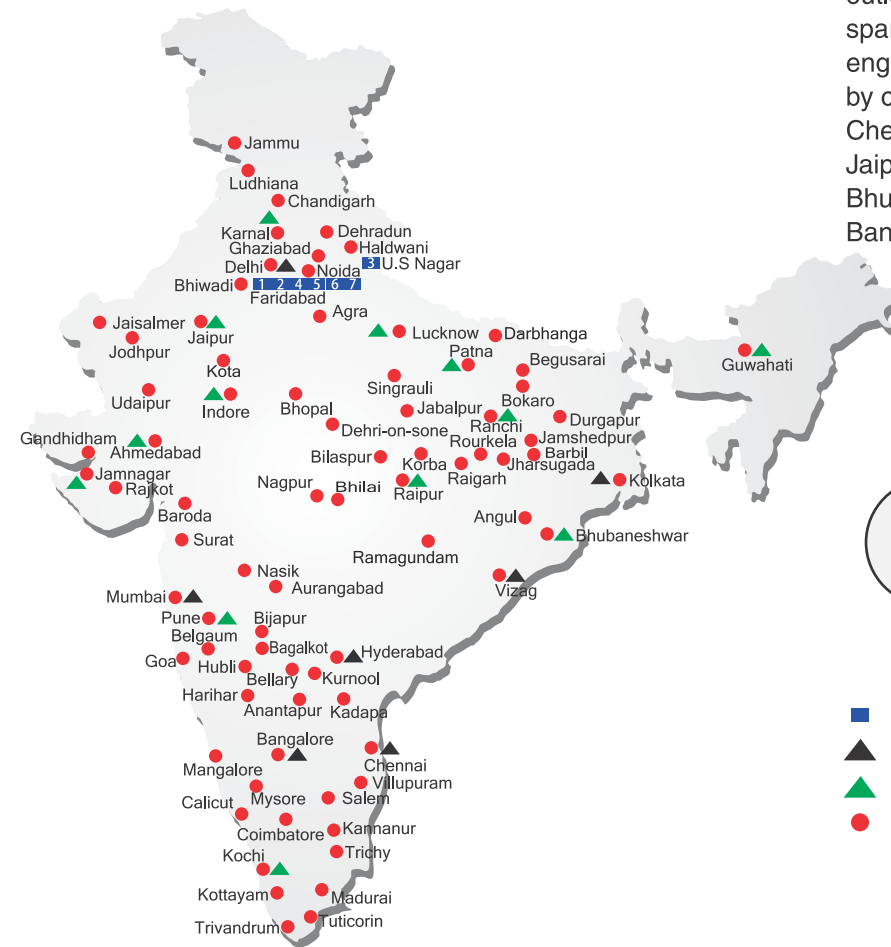

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

CUSTOMER CARE

TOLL FREE No

1800 1800 004

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS

MARKETING H.Q.

5th Floor, "TDI Center", Jasola, New Delhi - 25
Ph.: +91-11-40549900 (30 Lines), Fax: 40549922
E-mail: marketing@ace-cranes.com, works@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola, Palwal-121102, Haryana
Ph.: +91-1275-280111, Fax: +91-1275-280133
CIN : L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 74
Ph.: +91-22-25206846, 25207070, Telefax: 25207071
E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor, AJC Bose Road, Kolkata - 14, Ph.: +91-33-65012050
E-mail: acekolkatta@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road, Alwar Pet, Chennai - 18
Ph.: +91-44-24314253, Telefax: 24314252
E-mail: acechennai@ace-cranes.com



ACE

Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.



www.ace-cranes.com

ACE

FX210

Nextgen Hydraulic Truck Crane
Capacity : 20 tonnes

Rough terrain and rugged articulated new generation pick n move crane.

ACE **INDIA'S NO. 1**
MOBILE & TOWER CRANE CO.

- Heavy duty truck drive line
- Front Outriggers
- Front mounted ergonomically designed Cabin
- Improved kinematics with low Center of Gravity
- Slotted boom
- Self Adjusting hook block
- Fail safe air brakes



*Nothing beats an **ACE***





Specifications

FX210

LIFTING CAPACITY (Free on wheels)	20 Tonnes
ENGINE	Ashok Leyland 4 cylinder, water cooled diesel engine or equivalent TATA engine 101 bhp at 2200 RPM
Rated Power	
STEERING	Full power orbitrol with twin hydraulic double acting cylinders and 40° articulation on either side.
Turning Radius	8.2 Meters (approx)
TRANSMISSION	Heavy duty, Synchromesh with 8 forward and 2 reverse speeds and hi-low drive selector for creep speed
Axles	Front axle is rigidly mounted on the chassis and rear drive axle is mounted with 2 nos. leaf springs
Clutch	Heavy duty hydraulic clutch
Top Speed	35 KMPH on even metaled road (without load)
Gradeability	40% (unladen)
HYDRAULIC SYSTEM	<ul style="list-style-type: none">● Gear/Intra Vane type Main Pump● Three spools control valve with built in Relief valve (Heavy duty)● Suction line has 100 mesh size Strainer while return line is fitted with 25 micron full flow filter● Two double acting lift cylinders, two double acting steering cylinders and one double acting extension cylinder
BRAKES	<ul style="list-style-type: none">● Dual Circuit Brakes● Fully air actuated brakes on front and rear wheels.● Parking brake is pneumatically operated, fail safe type
ELECTRICAL SYSTEM	24 V Negative earth
TELESCOPIC BOOM	Three part slotted boom with hydraulically operated synchronized extensions (11.6 mtrs. height)
TYRES	
Front	12.00 x 20 - 18 PR (4 Nos.)
Rear	14.00 x 25 - 20 PR (2 Nos.)

Wheel base	5100 mm
Wheel track	Front 1880 mm Rear 1850 mm
HOIST	Winch is driven by hydraulic motor and fitted with rope tensioner. Hoisting is provided through self adjusting hook block employing 6 falls of 13 mm dia rope
Hoist Speed	50 Mtrs./Min. (Line speed)
BOOM LUFFING	
Range	-3° to + 62°
SAFETY	<ul style="list-style-type: none">● Hose failure protection● Audio over hoisting indication● Safety brakes on hoist● Self adjusting hook block● Front & Rear Tyre guards
STANDARD EQUIPMENT	<ul style="list-style-type: none">● Front Outriggers● Front mounted fully enclosed wide view cabin● Rear View Camera● Front and rear work lights● Reflectors & Rear View Mirrors● Tool kit● Cabin Fan● Wiper Motor● Gauges :<ul style="list-style-type: none">a) Water temperatureb) Engine oil pressurec) Fuel Gauged) RPM meter cum hour recordere) Air Pressure Gaugef) Speedometer
OPTIONAL EQUIPMENT	<ul style="list-style-type: none">● Fly jib (Max Capacity : 1.25 Tonnes)● Spark arrestor● Safe load indicator/LMI● Over Hoist hydraulic cutoff● Fire Extinguisher● Beacon rotating Light● Drag Winch● Front and side Proximity Sensors● Cabin Front Glass Protector● 4 part slotted boom, 3 parts hydraulically operated & synchronized and 4th part power extended (18.3 mtrs. height)
OPERATING WEIGHT	
Front Axle	7200 Kgs.
Rear Axle	10100 Kgs.
Total Weight	17300 Kgs.



OPTIMIZED KINEMATICS AND LOW C.G.
FX 210 crane has been designed with low center of gravity (C.G.) providing best in class stability and operational safety.



1 GROUND CLEARANCE
Ground clearance of 300mm for easier rough terrain operation.



2 STEERING WHEEL & CONTROLS
Steering wheel is provided as a standard fitment which along with ergonomically placed operator console and instrument cluster ensures ease of operation.




3 CABIN
Front mounted, ergonomically designed Cabin for better visibility and driveability.



4 EASY MAINTENANCE
The engine is easily accessible for daily maintenance checks including battery, air filter, oil level and cooling system.



5 OUT TRIGGERS
Front outriggers are provided as a standard feature for added safety during high lift operations.



6 SLOTTED BOOM
Facilitates easier load positioning and fitted with self adjusting hook block.



7 INCREASED VISIBILITY
Bigger size front windscreen provided for better visibility and safe operation.



8 ENGINE
Best in class Ashok Leyland/TATA 4 Cylinder engine having nationwide service support and spare parts availability.



9 DRAG WINCH
Optionally available for pulling and tugging application(s)

