


## ALL INDIA NETWORK

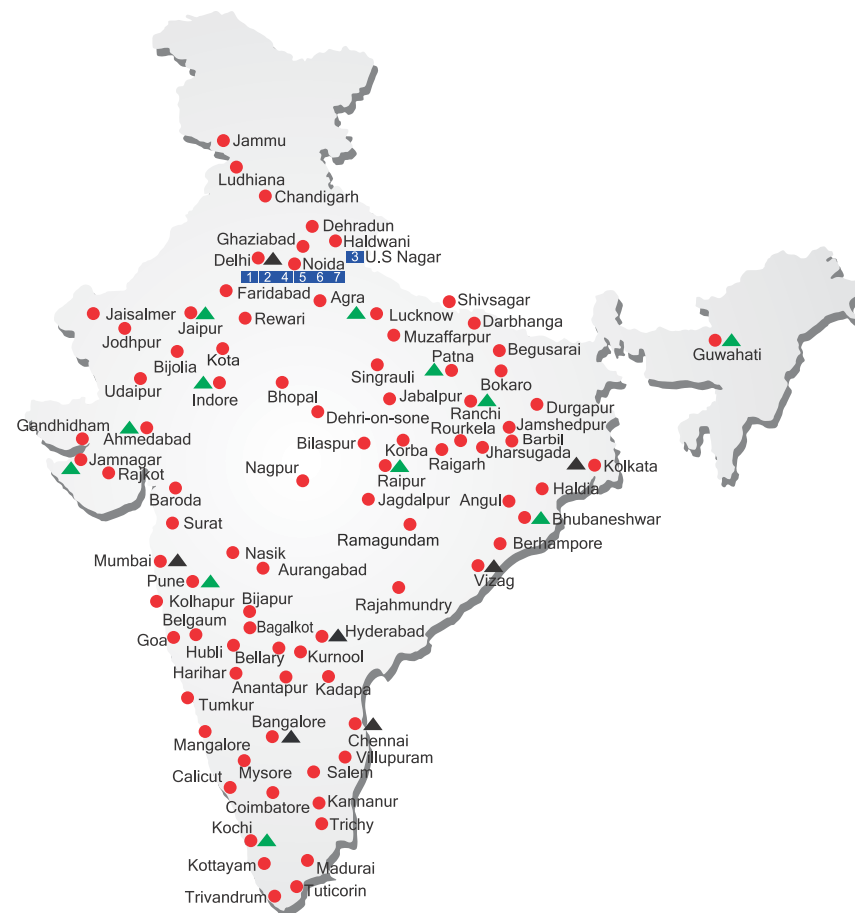

### SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

**CUSTOMER CARE**  
TOLL FREE No  
**1800 1800 004**

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS

### MARKETING H.Q.

4th Floor, Pinnacle, Suraj Kund, NCR-121009  
E-mail: marketing@ace-cranes.com

### REGISTERED OFFICE

Dudhola Link Road, Dudhola, Palwal-121102, Haryana  
Ph.: +91-1275-280111, Fax: +91-1275-280133  
CIN : L74899HR1995PLC053860

### MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 74  
Ph.: +91-22-25206846, 25207070, Telefax: 25207071  
E-mail: acemumbai@ace-cranes.com

### KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor, AJC Bose Road,  
Kolkata - 14. Ph.: +91-33-65012050  
E-mail: acekolkata@ace-cranes.com

### CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road,  
Alwar Pet, Chennai - 18  
Ph.: +91-44-24314253, Telefax: 24314252  
E-mail: acechennai@ace-cranes.com



# ACE

**Action Construction Equipment Ltd.**

Contact:

**CVI**  
CERTIFIED  
MANAGEMENT SYSTEM  
**ISO 9001**

ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.



www.ace-cranes.com

# ACE

# FX250

**Hydraulic Truck Crane**  
**Capacity : 25 tonnes**

Rough terrain and rugged  
articulated new generation pick n move crane.

**ACE** **INDIA'S NO. 1**  
MOBILE & TOWER CRANE CO.

- Front outriggers
- Heavy duty truck drive line
- Front mounted ergonomically designed Cabin
- Improved kinematics with low Center of Gravity
- Slotted boom
- Self Adjusting hook block
- Fail safe air brakes

*Nothing beats an **ACE***







## Specifications

## FX250

<b>LIFTING CAPACITY</b> (Free on wheels)	25 Tonnes
<b>ENGINE</b>	Ashok Leyland, 6 cylinder, water cooled diesel engine or equivalent
Rated Power	133 HP at 2300 RPM
<b>TRANSMISSION</b>	Heavy duty, Synchromesh with 8 forward and 2 reverse speeds and hi-low drive selector for creep speed
Axles	Front axle is rigidly mounted on the chassis and rear drive axle is mounted with 2 nos. leaf springs
Clutch	Heavy duty hydraulic clutch
Top Speed	35 KMPH on even metaled road (without load)
Gradeability	36% (unladen)
<b>HYDRAULIC SYSTEM</b>	<ul style="list-style-type: none"><li>● Gear/Intra Vane type Main Pump</li><li>● Five spools control valve with built in Relief valve (Heavy Duty)</li><li>● Suction line has 100 mesh size Strainer while return line is fitted with 25 micron full flow filter.</li><li>● Two double acting lift cylinders, two double acting steering cylinders, one acting extension cylinder and two double acting outrigger cylinders</li></ul>
<b>STEERING</b>	Full power orbitrol with twin hydraulic double acting cylinders and 40° articulation on either side.
Turning Radius	8.2 Meters (approx)
<b>TYRES</b>	
Front	12.00 x 24 - 20 PR (4 Nos.)
Rear	17.50 x 25 - 20 PR (2 Nos.)
Wheel base	5100 mm
Wheel track	Front 1900 mm Rear 1770 mm
<b>BRAKES</b>	<ul style="list-style-type: none"><li>● Dual Circuit Brakes</li><li>● Fully pneumatic brakes on front and rear wheels</li><li>● Parking brake is pneumatically operated, fail safe type.</li></ul>
<b>ELECTRICAL SYSTEM</b>	24 V Negative earth
<b>TELESCOPIC BOOM</b>	Three part slotted boom with hydraulically operated synchronized extensions (12 mtrs. height)

<b>HOIST</b>	Winch is driven by hydraulic motor and fitted with rope tensioner. Hoisting is provided through self adjusting hook block employing 6 falls of 13 mm dia steel core anti twist rope.
Hoist Speed	50 Mtrs./Min. (Line speed)
<b>BOOM LUFFING</b>	
Range	-3° to +66°
<b>SAFETY</b>	<ul style="list-style-type: none"><li>● Hose failure protection</li><li>● Audio over hoisting indication</li><li>● Safety brakes on hoist</li><li>● Self adjusting hook block</li><li>● Front and rear wheel guards</li></ul>
<b>STANDARD EQUIPMENT</b>	<ul style="list-style-type: none"><li>● Front Outriggers</li><li>● Front mounted fully enclosed wide view cabin</li><li>● Rear View Camera</li><li>● Front and rear work lights</li><li>● Reflectors &amp; Rear View Mirrors</li><li>● Tool Kit</li><li>● Cabin Fan</li><li>● Wiper Motor</li><li>● Gauges:<ul style="list-style-type: none"><li>a) Water temperature</li><li>b) Engine oil pressure</li><li>c) Fuel Gauge</li><li>d) RPM meter cum hour recorder</li><li>e) Air Pressure Gauge</li><li>f) Speedometer</li></ul></li></ul>
<b>OPTIONAL EQUIPMENT</b>	<ul style="list-style-type: none"><li>● Fly Jib (1.25 Tonnes Max Capacity)</li><li>● Spark arrester</li><li>● Safe load indicator/LMI</li><li>● Over Hoist hydraulic cutoff</li><li>● Fire Extinguisher</li><li>● Beacon rotating light</li><li>● Drag winch</li><li>● Front and side Proximity Sensors</li><li>● Cabin Front Glass Protector</li><li>● 4 part slotted boom, 2 parts hydraulically operated &amp; synchronized and 4th part power extended (19.2 mtrs. height)</li><li>● Helper/Slinger Seat</li></ul>
<b>OPERATING WEIGHT</b>	
Front Axle	10000 Kgs.
Rear Axle	10200 Kgs.
Total Weight	20200 Kgs.

**OPTIMIZED KINEMATICS AND LOW C.G.**  
FX 250 crane has been evolved/ designed keeping in mind operational safety parameters with low Center of Gravity (C.G.) providing best in class stability.



- 1 INCREASED VISIBILITY**  
Bigger size front windscreen provided for better visibility and safe operation.



- 2 EASY MAINTENANCE**  
The engine is easily accessible for daily maintenance checks including battery, air filter, oil level dipstick and cooling system.



- 3 HYDRAULIC & FUEL TANK**  
Easy approach and adequate capacities



- 4 OUT TRIGGERS**  
Front outriggers are provided as standard fitment for added safety during high lift operations.



- 5 GROUND CLEARANCE**  
Ground clearance of 300mm for easier rough terrain operation.



- 7 DRAG WINCH**  
Optionally Drag Winch is available for pulling & tugging applications



- 8 SLOTTED BOOM**  
Facilitates easier load positioning and fitted with self adjusting hook block.



- 10 CABIN**  
Front mounted, ergonomically designed Cabin for better visibility and driveability.




- 6 STEERING WHEEL & CONTROLS**  
Steering wheel is provided as a standard feature, which along with ergonomically placed operator console and instrument cluster ensures ease of operation.



- 9 ENGINE**  
Best in class Ashok Leyland 6 Cylinder engine having nationwide service support and spare parts availability.

ACE FX250 Crane fitted with 4 part slotted boom (19.2 Mtrs. height)

- Max. Capacity Fly jib : 1.25 Tonnes
- Max. Capacity manual extension : 2.0 Tonnes

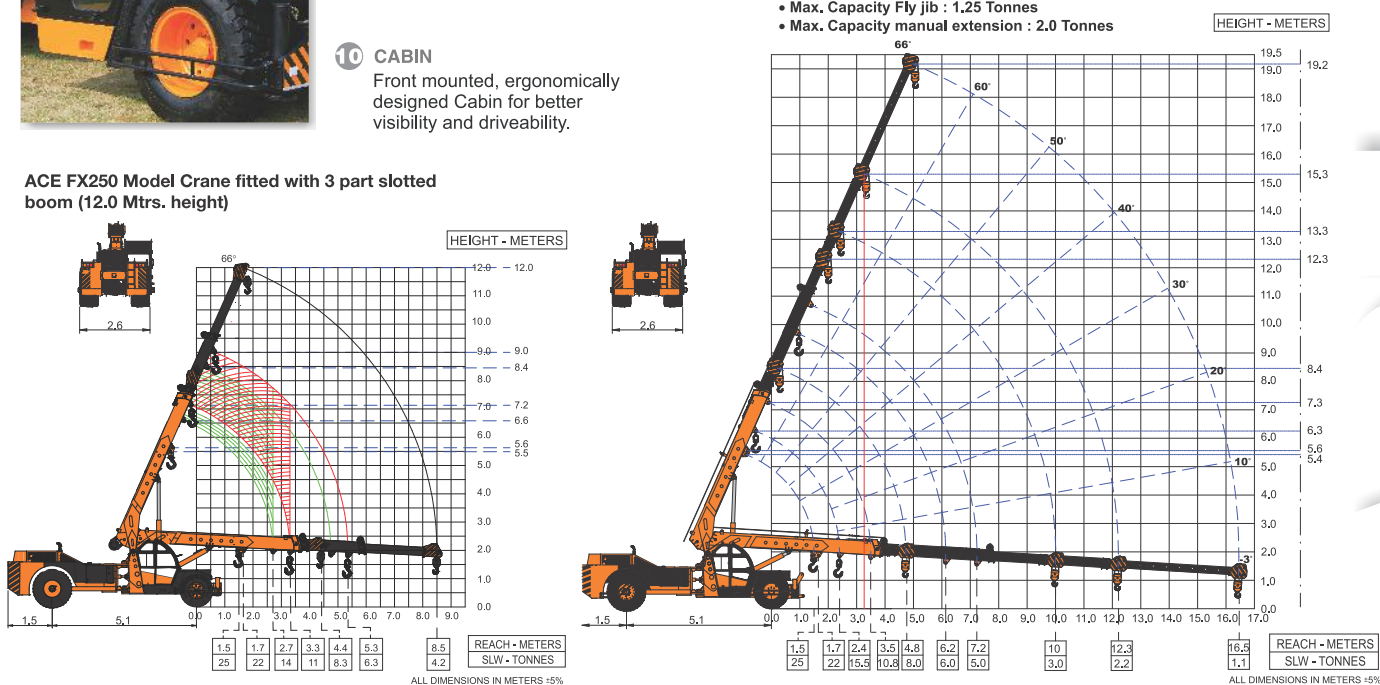

**NOTE:** • All the above specifications are pertaining to FX250 model fitted with 12.0 Mtrs. boom. • Rated loads are on the basis of operation on firm and level surface. • Full rated lifting capacity available in articulated / steered condition.

# ACE advantages