


# ACE

## ALL INDIA NETWORK

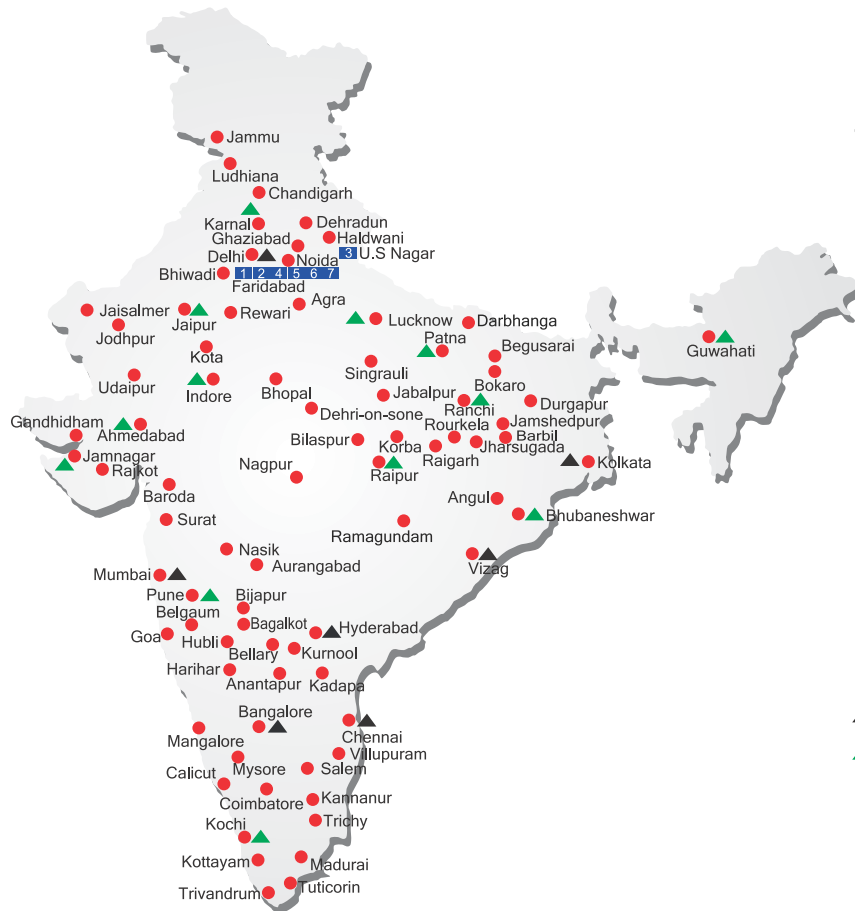

### SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

### CUSTOMER CARE

TOLL FREE No  
**1800 1800 004**

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS



# ACE

**Action Construction Equipment Ltd.**

Contact:

**CVI**  
CERTIFIED  
MANAGEMENT SYSTEM  
**ISO 9001**

ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.

### MARKETING H.Q.

5th Floor, "TDI Center", Jasola, New Delhi - 25  
Ph.: +91-11-40549900 (30 Lines), Fax: 40549922  
E-mail: marketing@ace-cranes.com, works@ace-cranes.com

### REGISTERED OFFICE

Dudhola Link Road, Dudhola, Palwal-121102, Haryana  
Ph.: +91-1275-280111, Fax: +91-1275-280133  
CIN : L74899HR1995PLC053860

### MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 74  
Ph.: +91-22-25206846, 25207070, Telefax: 25207071  
E-mail: acemumbai@ace-cranes.com

### KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor, AJC Bose Road,  
Kolkata - 14. Ph.: +91-33-65012050  
E-mail: acekolkata@ace-cranes.com

### CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road,  
Alwar Pet, Chennai - 18  
Ph.: +91-44-24314253, Telefax: 24314252  
E-mail: acechennai@ace-cranes.com

[www.ace-cranes.com](http://www.ace-cranes.com)

18XW/NOV/2015

# 18 XW

### Hydraulic Mobile Crane

Capacity : 18 tonnes  
Engine Power : 101 bhp.

Rough terrain and rugged articulated pick 'n' move crane.

**ACE** INDIA'S NO. 1  
MOBILE & TOWER CRANE CO.



*Nothing beats an ACE*



# ACE

Specifications

18 XW

LIFTING CAPACITY (Free on wheels)	18 Tonnes
ENGINE	Ashok Leyland ALHT4CTIC3/1 (BS III CEV) 4 Cylinder, Turbo Charged & after cooled OR Suitable Equivalent engine.
Rated Power	101 HP (74.3 KW) 2200 RPM
TRANSMISSION	Heavy Duty (ZF) with 8 forward & 2 reverse speeds and high-low range selector. 12" Heavy Duty, single, dry friction, wire woven clutch plate with diaphragm type pressure plate
Top Speed	46 KMPH without load
STEERING	Hydraulically operated with 55° articulation on either side and turning radius of 6.5 mtrs. (approx) on outer rear wheels.
BRAKES	Pneumatically assisted hydraulic brakes are provided on front wheels and pneumatic brakes are provided on rear wheels. Parking brake is pneumatically operated fail safe type, provided on rear wheels. Front and rear brakes are actuated through a single pedal.
HYDRAULIC SYSTEM	<ul style="list-style-type: none"> <li>● Intra vane type main pump.</li> <li>● 4 spools control valve (heavy duty).</li> <li>● Suction line has 100 mesh size strainer while return line is fitted with 25 micron full flow filter.</li> <li>● Two double acting lift cylinders, two double acting steering cylinders and one double acting extension cylinder.</li> </ul>
ELECTRICAL SYSTEM	24V. heavy duty battery with negative earth & suitable alternator.
TELESCOPIC BOOM	4 part boom, 3 part hydraulically actuated & Synchronized and 4th part power extended having self adjusting hook block.

BOOM LUFFING	
Range	-1° to + 62°
Time	20 Seconds.
HOIST	
Front	Winch is driven by hydraulic motor and fitted with self adjusting hook block employing 4 fall of 13mm dia. rope. 50 mtr/min (Line Speed)
TYRES	
Front	12.00 x 20 - 18 PR (4 Nos.)
Rear	14.00 x 25 - 20 PR (2 Nos.)
SAFETY	<ul style="list-style-type: none"> <li>● Audio Overload indicator</li> <li>● Hose Failure Protection</li> <li>● Audio Over hoisting indication</li> <li>● Safety Brakes on hoist</li> <li>● Self-adjusting Hook Block</li> <li>● Cylinder Guards</li> </ul>
FLUID CAPACITIES	
Engine	10.00 Ltrs.
Fuel Tank	145.00 Ltrs.
Hydraulic Tank	180.00 Ltrs.
Gear Box ZF	7.00 Ltrs.
Auxiliary Gear Box	3.00 Ltrs.
Differential	18.00 Ltrs.
STANDARD EQUIPMENT	<ul style="list-style-type: none"> <li>● ROPS fully enclosed wide view cabin</li> <li>● Front and rear work lights.</li> <li>● Reflectors &amp; rear view mirror.</li> <li>● Tool kit.</li> <li>● Front Tyre Protector</li> <li>● Wiper Motor</li> <li>● Gauges :- <ul style="list-style-type: none"> <li>a) Water temperature.</li> <li>b) Engine oil pressure.</li> <li>d) RPM meter cum hour recorder</li> <li>e) Air pressure</li> </ul> </li> </ul>
OPTIONAL EQUIPMENT	<ul style="list-style-type: none"> <li>● Fly Jib</li> <li>● Spark Arrester</li> <li>● Safe load indicator / LMI</li> <li>● Over Hoist hydraulic cutoff</li> <li>● Fire extinguisher</li> <li>● Beacon Light</li> <li>● Steering Wheel</li> <li>● Cabin Fan</li> <li>● 3 Part Boom (11.7 mtrs. Height)</li> </ul>
OPERATING WEIGHT	14500 kgs.



18XW - (3 part boom) 11.7 MTRS

18XW (4 part boom) 17.7 MTRS

