


Filter Cartridges for Dust Collectors

Ø 324, 327 mm MICROTEX



Filter medium with Nano fibres

APPLICATIONS

- Shot blasting plants
- Powder coating systems
- Separation of welding fumes
- Pharmaceutical Industry
- Safety filters
- Recycling

ADVANTAGES

- Up to 21 m² filter area per filter element
- Filter medium with Nano fibres and flame retardant possible
- Components certified for use in food production on request



Filter Cartridges for Dust Collectors

Ø 324, 327 mm MICROTEX

FILTER MEDIA

Customised to application: Polyester, cellulose, polypropylene, polyphenylene-sulfide, glass fibre, other nonstandard media

POSSIBLE EQUIPMENTS

- Antistatic
- Oil and water repellent
- Microporous finish
- Nano fibres
- ePTFE membrane

Certified in accordance with DIN EN 60335-2-69 appendix AA, Suitable for the filtration of health hazardous dusts

FEATURES

- Maximum operating temperature for cellulose 65 °C other filter media 80 °C
- Metal parts galvanized steel
- Cleanable by compressed air

SPECIAL TYPES


- Temperature resistant up to 220 °C
- Suitable for ATEX applications of all zones
- Certified for use in food production in accordance with EC and US FDA regulations
- Metal parts stainless steel
- Other individual solutions

ACCESSORIES


- Venturi nozzle 310-002-000014
- Short injector 310-002-000003
- Solenoid valves
- Valve control systems
- Air flow deflectors

Ø 324 mm

Raw gas side installation with Tie rod

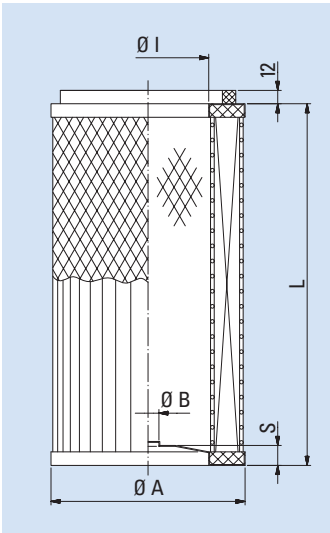


Both ends open

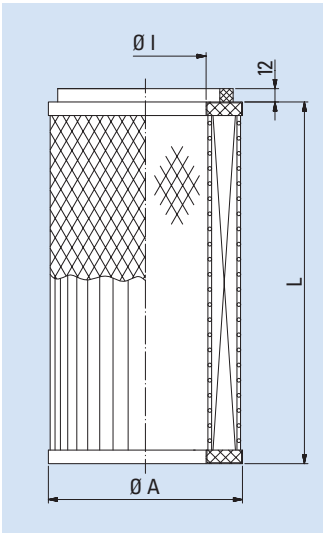


Ø 327 mm

Raw gas side installation with Tie rod

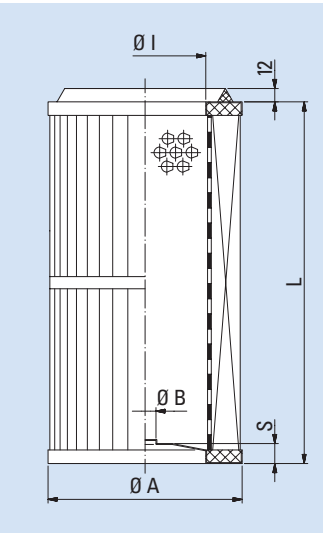

Both ends open

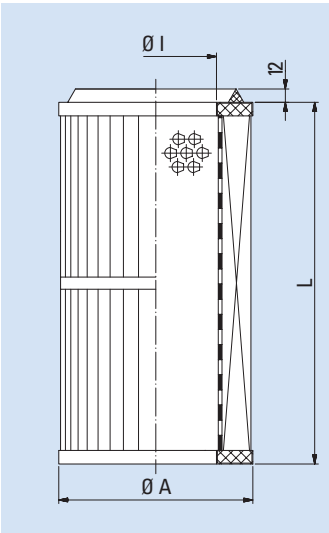

Ø A [mm]	Length L [mm]	Ø B [mm]	Ø I [mm]	S [mm]	Filter area [m²]
324	660	13	212	48	21
324	660	-	212	-	21
327	660	13	216	30	11
327	660	-	216	-	11

Technical changes reserved 05/24



We advise at the selection of the filter element, the best matching materials for the application as well as the design of dust collectors.

R + B Filter Mfg. Ent. Pvt. Ltd.

E 16 / 17 / 18, G.I.D.C. Savli, Vill. Manjusar
Vadodara 391 775 · India

T +91 (0) 26 67 26 40 30 · M +91 (0) 97 12 90 56 30 · info@rbfilter.com · www.rb-filter.com

