# **Dust Filter Cartridges Ø 115 mm with Thread**



## **Dust Filter Cartridges Ø115 mm with Thread**

#### **FILTER MEDIA**

Adjusted to application: Polyester, polypropylene, cellulose, aramid, polyphenylensulfide, other nonstandard media

### **Possible Equipments:**

- Antistatic
- Oil and water repellent
- PTFE finish
- Microporous finish
- Nano fibres
- Meltblown
- ePTFE membrane

Certified in accordance with DIN EN 60335-2-69 appendix AA, Suitable for the filtration of health hazardous dusts

#### **FEATURES**

- Maximum operating temperature 80 °C
- Metal parts galvanized steel
- Cleanable by compressed air

#### **SPECIAL TYPES**


- Temperature resistant up to 240 °C
- Suitable for ATEX applications of all zones
- Certified for use in food production in accordance with DIN EN 1935, FDA CFR 21 or cold water permission
- Metal parts of stainless steel
- Other individual solutions

#### **ACCESSORIES**

- Filter holders
- Solenoid valves
- Valve control systems


#### **SERVICE**

We advise at the selection of the filter element and the best matching filter medium for the application as well as the design of dust collectors.

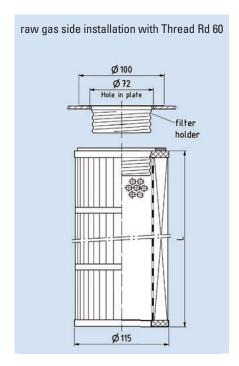

Ø [mm]	Length L [mm]	Filter area [m²]
115	202	0,3
115	302	0,4
115	602	0,8
115	982	1,3
115	1202	1,6

Accessory: Filter holder 310-001-000043



<b>Ø</b> [mm]	Length L [mm]	Filter area [m²]
115	202	0,3
115	302	0,5
115	602	1
115	982	1,6
115	1202	2

Accessory: Filter holder 310-001-000058

llation wit Ø 100 5/4×M10	h Thread Rd 74
<b>***</b>	filter
Ø 115	

<b>Ø</b> [mm]	Length L [mm]	Filter area [m²]
115	202	0,3
115	302	0,5
115	602	1
115	982	1,6
115	1202	2

Accessory: Filter holder 310-001-000045

Technical changes reserved 04 / 16



R + B Filter GmbH Bössingerstrasse 34 74243 Langenbrettach-Langenbeutingen Germany

Phone: +49 (0) 79 46 91 27-0 Fax: +49 (0) 79 46 91 27-39 E-Mail: info@rb-filter.de www.rb-filter.com

