




# PRO RK Series

SKU:- 2308-RK3588-KH-13-8064




PRODUCT MAY VARY FROM THE ACTUAL PRODUCT

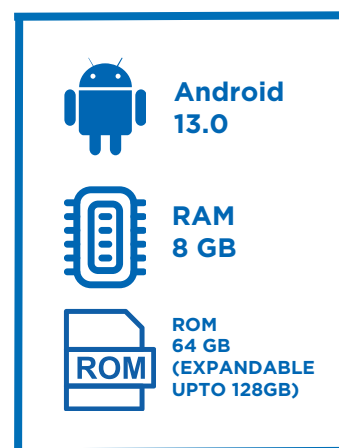

**Slim Frame Design**  
Thin & Lightweight  
Panel



**Octa-core**  
Processor



**Zero Gap**  
Bonding



**Diverse**  
Connectivity  
Multi-Interface  
Support



**Google**  
Certified

**PROMARK STANDS FOR : PROGRESSIVE, PROACTIVE & PROFICIENT**

[www.promark.co.in](http://www.promark.co.in)



# PRO RK Series

## DISPLAY

|                      |                                                                                                                                                                                                                                                                                                                      |                |                 |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|
| Active Screen Size   | 65"                                                                                                                                                                                                                                                                                                                  | 75"            | 86"             |
| Model No.            | PRO AT-65P                                                                                                                                                                                                                                                                                                           | PRO AT-75P     | PRO AT-86P      |
| Panel type           | IPS                                                                                                                                                                                                                                                                                                                  | IPS            | IPS             |
| Aspect Ratio         | 16:9                                                                                                                                                                                                                                                                                                                 | 16:9           | 16:9            |
| Backlight            | LED                                                                                                                                                                                                                                                                                                                  | LED            | LED             |
| Resolution           | 3840×2160                                                                                                                                                                                                                                                                                                            | 3840×2160      | 3840×2160       |
| Refresh Rate         | 120Hz                                                                                                                                                                                                                                                                                                                | 120Hz          | 120Hz           |
| Brightness           | 400nits                                                                                                                                                                                                                                                                                                              | 500nits        | 600nits         |
| Contrast Ratio       | 30000:1                                                                                                                                                                                                                                                                                                              | 30000:1        | 30000:1         |
| Viewing Angle(V/H)   | 178°/178°                                                                                                                                                                                                                                                                                                            | 178°/178°      | 178°/178°       |
| Life(MTBF)           | 1.07B(10 bits)                                                                                                                                                                                                                                                                                                       | 1.07B(10 bits) | 1.07B(10 bits)  |
| Touch Area(L*W)/mm   | 1445.6*824.8                                                                                                                                                                                                                                                                                                         | 1667.8*949.9   | 1914*1088.6     |
| Display Area(L*W)/mm | 1430.5*805.5                                                                                                                                                                                                                                                                                                         | 1651.4*929.9   | 1897.04*1067.96 |
| Glass Thickness      | 3.2mm                                                                                                                                                                                                                                                                                                                | 3.2mm          | 3.2mm           |
| Glass Hardness       | Mohs 7                                                                                                                                                                                                                                                                                                               | Mohs 7         | Mohs 7          |
| Bonding              | 0 gap                                                                                                                                                                                                                                                                                                                | 0 gap          | 0 gap           |
| Speaker              | 2X20 W Speaker                                                                                                                                                                                                                                                                                                       | 2X20 W Speaker | 2X20 W Speaker  |
| Subwoofer            | 25W                                                                                                                                                                                                                                                                                                                  | 25W            | 25W             |
| I/O Interface        | HDMI2.0 in*1 ; Type-C*1 ; Pubilc USB-A 3.0*3 ; Touch (Type B) *1 ; Touch USB-B 3.0*1 ; RS232*1 ; Public USB-A 3.0*2 ; Andriod USB-A 3.0*1 ; Mic in(3.5mm)*1 ; TF card*1 ; Type-C*1 ; HDMI 1.4 In*1 ; HDMI 2.0 In*2 ; DP1.2 In*1 ; WiFi antenna*4 ; HDMI 2.1 out*1 ; Type-C out*1 ; SPDIF out*1 ; RJ45*2 ; Line out*1 |                |                 |

## OPERATING SYSTEM

|                |                       |
|----------------|-----------------------|
| RAM            | DDR4 8GB              |
| ROM            | 64GB (OPTIONAL 128GB) |
| System Version | Android 13.0          |
| CPU            | Octa-core             |

## PROMARK TECHSOLUTIONS PRIVATE LIMITED

**CORPORATE OFFICE:**  
Plot No. F-22, Phase 8, Industrial Area,  
Mohali Punjab- 160055

**FACTORY:**  
Ludhiana Highway (NH-95) Morinda By-Pass,  
Village Madouli,Morinda, Distt. Ropar Punjab-140413

**SALES OFFICE:**  
A-14, GF, Okhla Industrial  
Area, Phase-2, New Delhi 110020

**Branch Offices:** Jammu and Kashmir, Chandigarh, Himachal Pradesh, Uttarakhand Haryana, Delhi, Rajasthan, UP-Lucknow & Bareilly, Bihar, Jharkhand, North East, Chhattisgarh, and Kolkata.

**For any inquiries**  
contact us at:

[www.promark.co.in](http://www.promark.co.in)



[sales@promark.co.in](mailto:sales@promark.co.in)



**1800 103 8878**

# PRO RK Series

## TOUCH SYSTEM

|                          |                                                                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Performance              | Technology:Infrared; Minimum Touch Object: 2mm; Touch Precision:2mm; Writing Precision:±0.5mm; Resolution:32767*32767; Response Time: 3.3ms |
| Points                   | 40 point touch/drawing, 10 point writing(2mm)                                                                                               |
| Tools                    | Fingers, pens, or other untransparent objects.                                                                                              |
| Compatibility (OPTIONAL) | Windows XP/7/8/10/11; Linux; Chrome OS; Mac OS; Android                                                                                     |

## DIMENSION & WEIGHT

|                                                        |                                                                                            |                                                                                              |                                                                                              |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Physical Dimensions<br>(L*W*T)/mm                      | 1484.5*891.3*88.1<br>(without wall mount)<br>1484.5*891.3*120.1<br>(with wall mount)       | 1706.7*1016.4*88<br>(without wall mount)<br>1706.7*1016.4*120<br>(with wall mount)           | 1952.9*1155.1*88<br>(without wall mount)<br>1952.9*1155.1*114.2<br>(with wall mount)         |
| Physical Dimensions<br>(External camera)<br>(L*W*T)/mm | 1490.80*922.46*84.75<br>(without wall mount)<br>1490.80*922.46*116.95<br>(with wall mount) | 1712.16*1047.22*84.95<br>(without wall mount)<br>1712.16*1047.22*117.15<br>(with wall mount) | 1957.96*1185.20*84.95<br>(without wall mount)<br>1957.96*1185.20*112.15<br>(with wall mount) |
| Packed Dimensions<br>(L*W*H)/mm                        | 1690*210*1060                                                                              | 1920*210*1150                                                                                | 2154*230*1354                                                                                |
| Net Weight                                             | 40Kg±1Kg                                                                                   | 53Kg±1Kg                                                                                     | 66Kg±1Kg                                                                                     |
| Gross Weight                                           | 52Kg±1Kg                                                                                   | 67Kg±1Kg                                                                                     | 84Kg±1Kg                                                                                     |

## PROMARK TECHSOLUTIONS PRIVATE LIMITED

**CORPORATE OFFICE:**  
Plot No. F-22, Phase 8, Industrial Area,  
Mohali Punjab- 160055

**FACTORY:**  
Ludhiana Highway (NH-(95) Morinda By-Pass,  
Village Madouli,Morinda, Distt. Ropar Punjab-140413

**SALES OFFICE:**  
A-14, GF, Okhla Industrial  
Area, Phase-2, New Delhi 110020

Branch Offices: Jammu and Kashmir, Chandigarh, Himachal Pradesh, Uttarakhand Haryana, Delhi, Rajasthan, UP-Lucknow & Bareilly, Bihar, Jharkhand, North East, Chhattisgarh, and Kolkata.

**For any inquiries**  
contact us at:

[www.promark.co.in](http://www.promark.co.in)



[sales@promark.co.in](mailto:sales@promark.co.in)



**1800 103 8878**