


Deep Link Chains



Technical Specifications

CHAIN NO.	Ultimate Strength		PITCH							I	Pin \varnothing Pd	Bush \varnothing Bd	Roller \varnothing Rd	H1	H2	T	L	L1 max. of Connection Pin
	Kgf	M.T	P	P	P	P	P	P	P									
TDE 56	5.0	63	80	100	125	160	200	250	24	10	15	42	45	30	4	47	54	
TDE 80	8.0	80	100	125	160	200	250	315	28	12	18	50	50	32.5	5	57	65	
TDE 112	11.0	80	100	125	160	200	250	315	32	15	21	60	60	40	6	65	74	
TDE 160	16.0	100	125	160	200	250	315	400	37	18	25	70	70	45	7	75	86	
TDE 224	22.0	125	160	200	250	315	400	500	43	21	30	85	90	60	8	88	100	
TDE 315	31.0	160	200	250	315	400	500	630	48	25	36	100	100	65	10	100	114	
TDE 450	45.0	200	250	315	400	500	630	800	56	30	42	120	120	80	12	116	136	
TDE 630	62.0	250	315	400	500	630	800	1000	66	36	50	140	140	90	14	140	156	
TDE 900	90.0	250	315	400	500	630	800	1000	78	44	60	170	180	120	16	164	185	

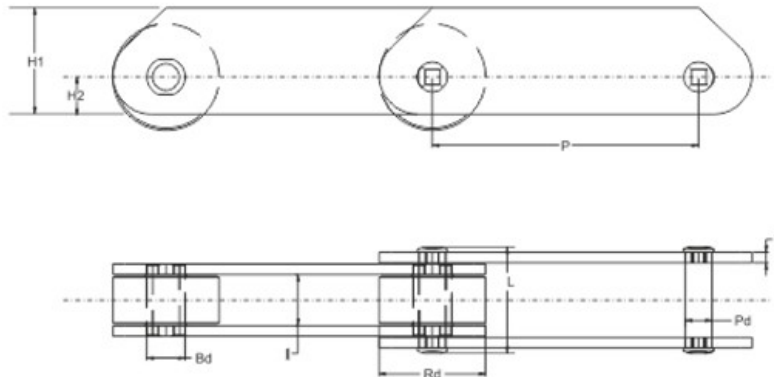

An ISO 9001-2008 Certified Company

ALL DIMENSIONS ARE IN MM.