
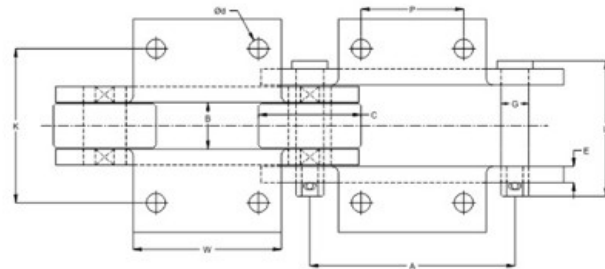
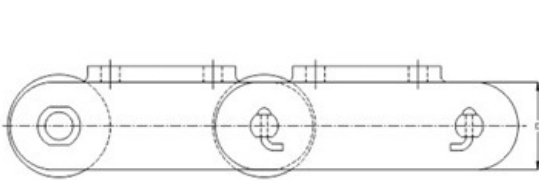


Sugar Industry Chains

Cane Carrier Chains

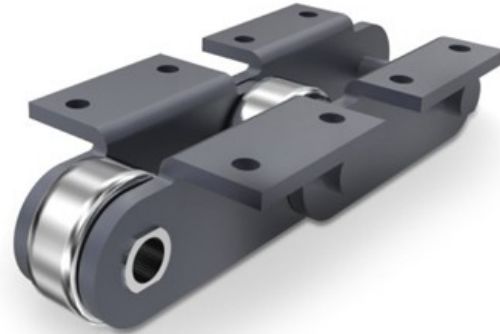

Technical Specifications

| CHAIN NO. | PITCH A | BREAKING LOAD M.T. | INSIDE WIDTH B | PIN DIA. G | ROLLER DIA. C | LINK | | K | W | t | ØD | L |
|-------------|---------|--------------------|----------------|------------|---------------|------|----|-----|-----|------|------|-----|
| | | | | | | D | E | | | | | |
| TRE/CA/C/35 | 152.4 | 35 M.T. | 37 | Ø 24 | Ø 76.2 | 60 | 10 | 110 | 110 | 75 | Ø 15 | 95 |
| TRE/CA/C/45 | 152.4 | 45 M.T. | 38 | Ø 22 | Ø 76.2 | 65 | 10 | 110 | 120 | 72 | Ø 16 | 95 |
| TRE/CA/C/50 | 152.4 | 50 M.T. | 38 | Ø 24 | Ø 76.2 | 65 | 12 | 118 | 110 | 76.2 | Ø 14 | 102 |
| TRE/CA/C/51 | 152.4 | 51 M.T. | 37 | Ø 27 | Ø 82 | 68 | 12 | 150 | 110 | 75 | Ø 15 | 100 |
| TRE/CA/C/55 | 152.4 | 55 M.T. | 37 | Ø 25 | Ø 90 | 75 | 12 | 112 | 120 | 78 | Ø 15 | 100 |
| TRE/CA/C/68 | 200 | 68 M.T. | 37 | Ø 32 | Ø 90 | 75 | 16 | 158 | 120 | 76 | Ø 16 | 116 |



An ISO 9001-2008 Certified Company

ALL DIMENSIONS ARE IN MM.